

Equipment suitable for the nebulisation of low density lubricating oils, detergents, sterilizers, and so on. When they are filled with liquid for 3/4 of their capacity and air is put inside at 6-8 bar they work automatically without any continuous link to compressed air.

They are suitable for the washing of mechanical parts and items in general. The air-operated working at low pressure (max 0,5 bar) allows the washing with brush with continuous flux, or the washing of the items plunged in the liquid directly in the tank. The lid can be removed and so it is possible to work better.





### **PRESSURE SPRAYERS - WASHING**


Equipment suitable for the nebulisation of low density lubricating oils, detergents, sterilizers, and so on. When they are filled with liquid for 3/4 of their capacity and air is put inside at 6-8 bar they work automatically without any continuous link to compressed air.

They are suitable for the washing of mechanical parts and items in general. The air-operated working at low pressure (max 0,5 bar) allows the washing with brush with continuous flux, or the washing of the items plunged in the liquid directly in the tank. The lid can be removed and so it is possible to work better.



### **PRESSURE SPRAYERS - WASHING INDEX**



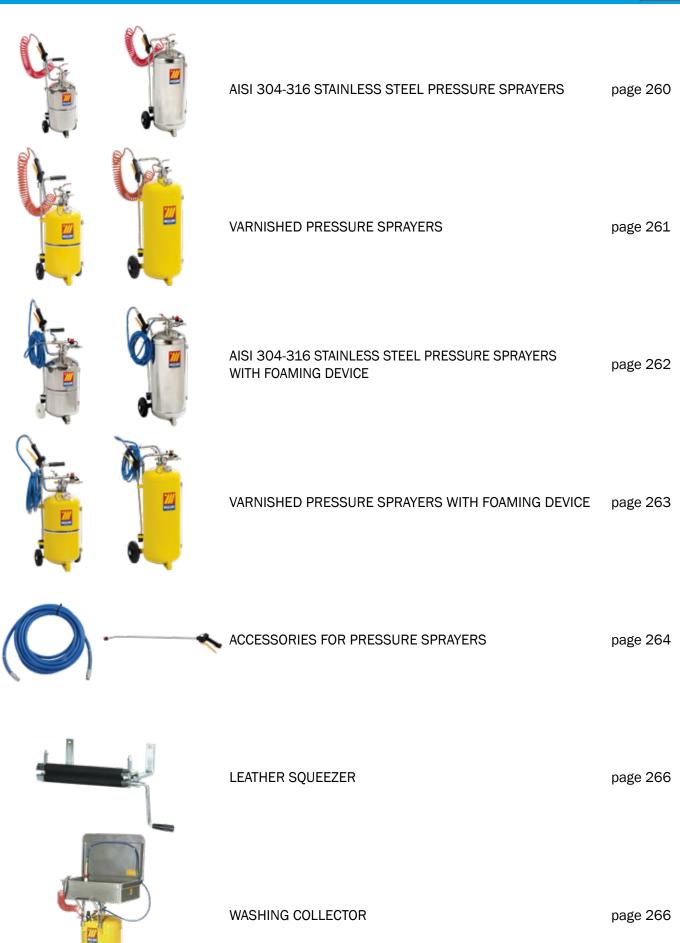



### STAINLESS STEEL PRESSURE SPRAYERS




### Art. 050-1508-000

AISI 304 stainless steel pressure sprayer 16 I Tank capacity 16 I with lever indicator Equipped with: Art.053-1537-000 10 m RILSAN spring hose Art.053-1541-000 Spray gun with 600 mm stainless steel pipe Manometer with stainless steel case






#### Art. 050-1510-000




E

AISI 304 stainless steel pressure sprayer 24 I Tank capacity 24 I with lever indicator Equipped with: Art.053-1537-000 10 m RILSAN spring hose Art.053-1541-000 Spray gun with 600 mm stainless steel pipe Manometer with stainless steel case



#### Art. 050-1511-000

28 cm AISI 316 stainless steel pressure sprayer 24 I Ideal for chemical products Tank capacity 24 I with lever indicator Equipped with: Art.053-1537-000 10 m RILSAN spring hose Art.053-1541-000 Spray gun with 600 mm stainless steel pipe Manometer with stainless steel case AISI 316 stainless steel connections Viton seals




050-1511-000 9,700 0.074 Art. 050-1515-000

m

Kg

AISI 304 stainless steel pressure sprayer 50 I Tank capacity 50 I with lever indicator Equipped with: Art.053-1537-000 10 m RILSAN spring hose Art.053-1541-000 Spray gun with 600 mm stainless steel pipe Manometer with stainless steel case






Equipment suitable for the nebulisation of low density lubricating oils, detergents, disinfectants, and so on. When they are filled with liquid for 3/4 of their capacity and air is put inside at 6-8 bar they work automatically without any continuous link to compressed air.


### **VARNISHED STEEL PRESSURE SPRAYERS**



### Art. 050-1520-000

Varnished steel pressure sprayer 24 I Tank capacity 24 I with lever indicator Equipped with: Art.053-1537-000 10 m RILSAN spring hose Art.053-1541-000 Spray gun with 600 mm stainless steel pipe









050-1520-000

#### Art. 050-1525-000 Varnished steel pressure sprayer 50 I Tank capacity 50 I with lever indicator


Equipped with: Art.053-1537-000 10 m RILSAN spring hose Art.053-1541-000 Spray gun with 600 mm stainless steel pipe








Art. 050-1530-000 Varnished steel pressure sprayer 100 I Tank capacity 100 I with lever indicator Equipped with: Art.053-1537-000 10 m RILSAN spring hose Art.053-1542-000 Spray gun with 750 mm stainless steel pipe







Equipment suitable for the nebulisation of low density lubricating oils, detergents, disinfectants, and so on. When they are filled with liquid for 3/4 of their capacity and air is put inside at 6-8 bar they work automatically without any continuous link to compressed air.



### STAINLESS STEEL PRESSURE SPRAYERS WITH FOAMING DEVICE



051-1512-000



051-1513-000




051-1517-000

#### Art. 051-1512-000


AISI 304 stainless steel pressure sprayer 24 I With foaming device Tank capacity 24 I with lever indicator Equipped with: Art.053-1538-000 8x13 8 m length pvc hose Art.053-1541-000 Spray gun with 600 mm stainless steel pipe Art.053-1552-000 Thermoplastic fan nozzle for foaming 16,8 l/min Art.053-1554-000 Foaming coupler super Manometer with stainless steel case






Art. 051-1513-000 AISI 316 Stainless steel pressure sprayer 24 I With foaming device Ideal for corrosive liquids and chemical products Tank capacity 24 I with lever indicator Equipped with: Art.053-1538-000 8x13 8 m length pvc hose Art.053-1541-000 Spray gun with 600 mm stainless steel pipe Art.053-1552-000 Thermoplastic fan nozzle for foaming 16,8 l/min Art.053-1554-000 Foaming coupler super Manometer with stainless steel case AISI 316 stainless steel connections Viton seals






### **051-1513-000** 10,700 0,074 1



AISI 304 stainless steel pressure sprayer 50 I With foaming device Tank capacity 50 I with lever indicator Equipped with: Art.053-1538-000 8x13 8 m length pvc hose Art.053-1541-000 Spray gun with 600 mm stainless steel pipe Art.053-1552-000 Thermoplastic fan nozzle for foaming 16,8 l/min Art.053-1554-000 Foaming coupler super Manometer with stainless steel case





Equipment suitable for the nebulisation of detergents with foaming device. When they are filled with liquid for 3/4 of their capacity and air is put inside at 6-8 bar they work automatically without any continuous link to compressed air.


### VARNISHED STEEL PRESSURE SPRAYERS WITH FOAMING DEVICE




#### Art. 051-1522-000

Varnished steel pressure sprayer 24 I With foaming device Tank capacity 24 I with lever indicator Equipped with:

Art.053-1538-000 8x13 8 m length pvc hose Art.053-1541-000 Spray gun with 600 mm stainless steel pipe Art.053-1552-000 Thermoplastic fan nozzle for foaming 16,8 l/min Art.053-1554-000 Foaming coupler super






### Art. 051-1527-000 Varnished steel pressure sprayer 50 I

With foaming device Tank capacity 50 I with lever indicator

Equipped with:

Art.053-1538-000 8x13 8 m length pvc hose Art.053-1541-000 Spray gun with 600 mm stainless steel pipe Art.053-1552-000 Thermoplastic fan nozzle for foaming 16,8 l/min Art.053-1554-000 Foaming coupler super












051-1527-000

Art. 051-1532-000 Varnished steel pressure sprayer 100 I With foaming device Tank capacity 100 I with lever indicator Equipped with: Art.053-1538-000 8x13 8 m length pvc hose Art.053-1542-000 Spray gun with 750 mm stainless steel pipe Art.053-1552-000 Thermoplastic fan nozzle for foaming 16,8 l/min Art.053-1554-000 Foaming coupler super








Equipment suitable for the nebulisation of detergents with foaming device. When they are filled with liquid for 3/4 of their capacity and air is put inside at 6-8 bar they work automatically without any continuous link to compressed air.

### ACCESSORIES FOR PRESSURE SPRAYERS



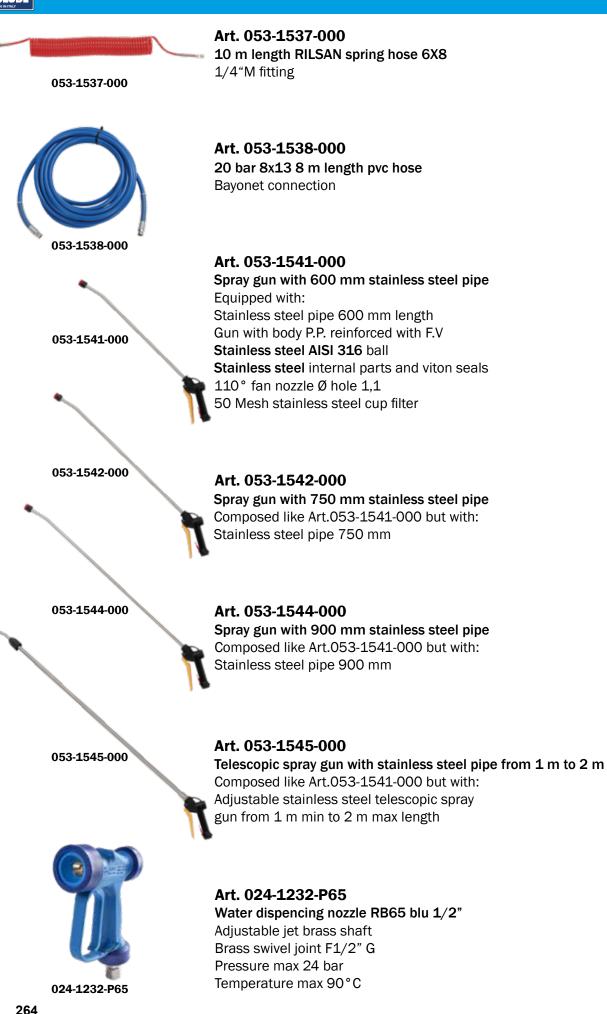

### **ACCESSORIES FOR PRESSURE SPRAYERS**

**Art. 053-1546-000 110° thermoplastic (POM)** fan nozzle Ø hole 0,9 Yellow color

Art. 053-1547-000 110° thermoplastic (POM) fan nozzle Ø hole 1,1 Blue color

Art. 053-1548-000 110° thermoplastic (POM) fan nozzle Ø hole 1,3 Red color

Art. 053-1550-000 110° thermoplastic (POM) fan nozzle Ø hole 1,8 White color

Art. 053-1552-000 Thermoplastic fan nozzle for foaming Delivery capacity 3 bar 16,8 l/min Brown color

Art. 053-1553-000 Stainless steel fan nozzle for foaming Delivery capacity 3 bar 9,8 l/min

Art. 053-1554-000 Thermoplastic super foaming coupler Red color

Art. 053-1555-000 Stainless steel cup filter 50 Mesh

Art. 053-1560-000 Thermoplastic nozzle holder protection fitting Red color















053-1554-000










### **LEATHER SQUEEZER - WASHING COLLECTOR**


#### Art. 054-1556-000

Wall-mounted leather squeezer

With galvanized support angle brackets









These articles are essential in car washings in order to make it easy and improve the drying of vehicles with leather or synthetics clothes.



#### Art. 055-1560-000

Washing collector with wheeled tank 65 I Collector capacity 50 I with removable lid Tank capacity 65 I Max pressure use 0,5 bar Equipped with: Filter and grate of decantation Blowing nozzle with spiral hose Brush with nylon bristles with 1,5 m length pvc hose







057-1563-000

Art. 057-1563-000 Brush with nylon bristles for washing collector

For the washing of mechanical parts and items in general. The air-operated working at low pressure (max 0,5 bar) allows the washing with brush with continuous flux, or the washing of the items plunged in the liquid directly in the tank. For a correct use, spill 48-52 I of detergent liquid. The lid can be removed and so it is possible to work better.

#### WARNING!

Do not use inflammable or corrosive liquids or substances that emanate toxic vapors. Use exclusively specific chemical products for the washing of mechanical parts, to use only according to regulation furnished by the manufacturer.

# **WASHING COLLECTOR**







# **TYRE INFLATORS**




and the Parts

# **TYRE INFLATORS**



They are suitable for service stations and garages, for checking and re-establishing the tyre pressure through the inflating valve and discharge with lever in the version with automatic charge, with the inflating gun in the version with manual charge.

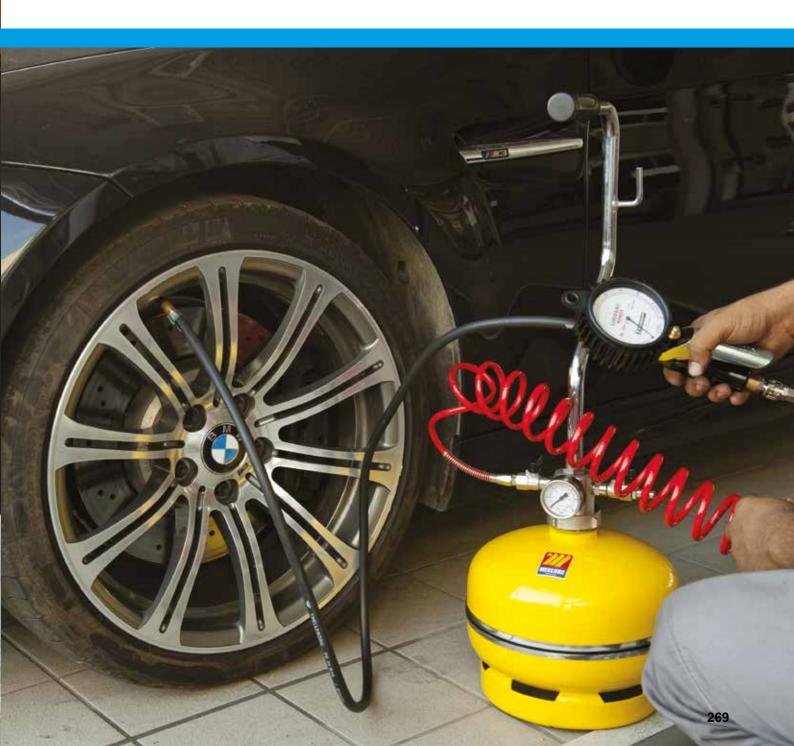

# **TYRE INFLATORS**



They are suitable for service stations and garages, for checking and re-establishing the tyre pressure through the inflating valve and discharge with lever in the version with automatic charge, with the inflating gun in the version with manual charge.



### **TYRE INFLATORS INDEX**







SWIVELLING CLOSED HOSE REEL TO INFLATE TYRES page 274



ACCESSORIES FOR TYRE INFLATORS

page 274



### PORTABLE TYRE INFLATORS WITH AUTOMATIC CHARGE







060-1583-000





Art. 060-1582-000 Approved CEE tyre inflator 12 I with automatic charge Tank capacity 12 I Equipped with: Approved gauge Ø 80 with scale 0-10 bar 1,20 m rubber hose with double clip-on connector Art.063-1586-000 Automatic charger





Art. 060-1583-000 Approved CEE portable tyre inflator 12 I with automatic charge with support Tank capacity 12 I Equipped with: Approved gauge Ø 80 with scale 0-10 bar 1,20 m rubber hose with double clip-on connector Support with automatic charger





Art. 063-1586-000 Automatic charger for tyre inflators Connection M 1/2" G

Technical data		060- <b>1582-</b> 000	060-1583-000
Max pressure tank	bar	10	10
Max working pressure	bar	8	8
Calibrated safety	bar	10	10
Approved CE Ø 80 gauge	bar	0-10	0-10

They are suitable for service stations and garages, for checking and re-establishing the tyre pressure through the inflating and deflating valve lever. They have automatic charge in order to be ready for use. The operation of inflation and deflation of the tyres will be carried our through a unique three positions lever. To have the tyre inflator ready for use it is enough to put it on the automatic charger installed on the line of the compressed air.

NOTE: APPROVED FOR PUBLIC USE

# **TYRE INFLATORS WITH MANUAL CHARGE**



### Art. 061-1590-000

Portable tyre inflator with manual charge12 I Tank capacity 12 I Equipped with: Reading gauge Ø 50 mm 0-10 bar Art.063-1596-000 5 m RILSAN spring hose Art.063-1597-000 Inflating gun with Ø 63 gauge

Art. 061-1591-000 Portable tyre inflator with manual charge12 I Like art.061-1590-000 but with: Art.063-1598-A00 Michelin approved inflating gun with Ø 80 gauge




061-1591-000


Art. 061-1594-000 Wheeled tyre inflator with manual charge 24 I Tank capacity 24 I Equipped with: Reading gauge Ø 80 mm 0-10 bar Art.063-1596-000 5 m RILSAN spring hose Art.063-1597-000 Inflating gun with Ø 63 gauge

#### Art. 061-1595-000

Wheeled tyre inflator with manual charge 24 I Like art.061-1594-000 but with: Art.063-1598-A00 Michelin approved inflating gun with Ø 80 gauge

MECLUBE	Kg	m³	NP
061-1590-000	7,550	0,081	1
061-1591-000	7,800	0,081	1
061-1594-000	11,500	0,074	1
061-1595-000	11,600	0,074	1







061-1595-000

Technical data		061-1590-000	061-1591-000	061-1594-000	061-1595-000
Max pressure tank	bar	10	10	10	10
Max working pressure	bar	8	8	8	8
Calibrated safety valve	bar	10	10	10	10
Approved CE Ø 80 gauge	bar	0-10	0-10	0-10	0-10

They are necessary in service stations and garages, for checking and re-establishing the tyre pressure through the inflating gun with gauge scale 0-10 bar.







1/4 "M bayonet fitting connection

Art. 063-1597-000 Inflating gun with Ø 63 gauge Scale 0-10 bar + 0-140 PSI Rubber gauge-cover Flexible hose 0,40m with coupler

Art. 063-1598-000

Approved inflating gun with Ø 80 gauge, approved to European Directive 2011/17/UE Scale 0-10 bar Rubber gauge-cover Flexible hose 0,40m with coupler

#### Art. 063-1598-A00

Michelin approved inflating eurodainu gun with Ø 80 gauge approved to European Directive 2011/17/UE Scale 0,7-12 bar/PSI Rubber gauge-cover Flexible hose 1,50m with coupler

Art. 063-1599-000

Angle head connector for twin tyres Flexible hose 0,80m with coupler

Art. 063-1581-000

Swiveling closed hose reel for inflating tyres Equipped with:

Art.075-4301-211 Swiveling closed hose reel with hose PU 8x13 20 bar 11 m Art.063-1598-A00 Michelin approved inflating eurodainu gun with Ø 80 CEE gauge

It is equipped with a wall-fixing bracket which makes the wall fixing easier. The connection of the hose reel to the wall-fixing bracket is very fast and it allows a quick connection and disconnection.

The continuous connection to the compressed air system makes the system of inflation ready to use.

