





www.meclube.com

ELECTRIC PUMPS FOR FLUIDS

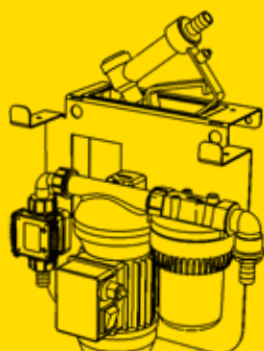

MADE IN ITALY



Fully Italian production












































MECLUBE gives to all its customers the availability of a global service, assured by a wide range of products. The excellent relation between quality/price and the respect of the delivery time make our company an ideal partner. Thanks to the high flexibility of our modalities of production we are able to establish an exceptional relation with our customers that comes true in the customization, in the colour, in the brand of the company on the standard range of our products. Our purchase cycle becomes complete with a speedy and qualified assistance service.

Service

Our company is able to offer to all our customers items of high quality and availability. It has a modern and innovative equipment of project, a lot of machines with a huge productive potential, a wide range of stamps, manufacturing cycles, tools, test and assembly machinery. Our customers represent the most important patrimony of MECLUBE. We are convinced that people make the difference, and we are at their disposal to start a relationship of growth and innovation, always having in mind the only possible result: the best one.

PRODUCTS INDEX



	"Battery Kit"page. 2		"Benz Kit"page. 106
	"Barrel Kit"page. 4		"Benz-Tank" for gasolinepage. 112
	"Transfer Kit"page. 8		Gasoline "Caddy"page. 114
	"Barrel Kit"page. 12		Electric pump for gasolinepage. 116
	"Dispenser Kit"page. 16		Mechanical/digital meters for gasoline nozzles for gasoline transferpage. 117
	"Wall Mec"page. 20		Kit for "AdBlue® IBC"page. 120
	"Meclube Box"page. 30		"Barrel Kit AdBlue®"page. 126
	"Mec-Reel" distributorpage. 32		"Transfer Kit AdBlue®"page. 130
	"Cami Dispenser"page. 34		"Meclube Box AdBlue®"page. 134
	"Gaia Service"page. 46		"Electronic Cami Dispenser AdBlue®"page. 136
	"MecGest Box"page. 52		"Electronic Gaia Service AdBlue®"page. 140
	Diesel tankpage. 56		AdBlue® Tankpage. 144
	Diesel "Caddy"page. 66		AdBlue® Tank-distributor "DEF-Tank"page. 148
	"Multitank" "Tank in Tank"page. 68		AdBlue® "Caddy"page. 150
	"Mec-Filter"- "EcoFilter"page. 70		AdBlue® transfer kit "Giuly-Blu"page. 152
	Battery pumps for diesel 12-24Vpage. 74		Trolleys for drums 180-220Lpage. 156
	Electric pumps for dieselpage. 77		Electric diaphragm pumps for AdBlue®page. 158
	Electric pumps for oil and lubricantspage. 82		Submersible AdBlue® Electro-pump "Mec-Ariel"page. 160
	Mechanical/digital meters for dieselpage. 84		Air-operated double diaphragm pumpspage. 162
	Accessories for MecGestpage. 88		Manual/automatic nozzles for AdBlue®page. 164
	Manual/automatic nozzlespage. 89		Digital meters and filters for AdBlue®page. 166
	Water separating delivery filterspage. 93		Fittings and connections for AdBlue® Suction hoses kit for AdBlue®page.168
	Suction hose kits for diesel Antistatic rubber hoses for dieselpage. 95		Manual pumps for AdBlue® transferpage. 170
	Automatic hose reels for diesel valves filters fittingspage. 99		Automatic hose reels for AdBlue®page.172
	Jerry cans for fuel transferpage. 103		Digital flow meter for food Manual nozzles for foodpage. 176
	Manual pumps for dieselpage. 104		Stainless steel manual pump Trolley for 20-30l drumspage. 177

Portable diesel transferring kit with 12V or 24V DC electric pump. It is useful when the distribution or the diesel fuel transfer are needed, but only the electric power supply of a battery is available.

“Battery Kit” series composed by:



Art. 091-5080-045 12V Pump - power cable (sec. 2,5 mmq, 2 m lenght) with pincers and fuse - 45 l/min

Art. 091-5082-045 24V Pump - power cable (sec. 2,5 mmq, 2 m lenght) with pincers and fuse - 45 l/min



Art. 091-5081-060 12V Pump - power cable (sec. 4 mmq, 4 m lenght) with pincers and fuse - 60 l/min

Art. 091-5083-060 24V Pump- power cable (sec. 4 mmq, 4 m lenght) with pincers and fuse - 60 l/min



Art. 091-5081-085 Pump 12 V - power cable (sec. 6 mmq, 4 m lenght) with pincers and fuse - 85 l/min

Art. 091-5083-085 24 V Pump - power cable (sec. 6 mmq, 4 m lenght) with pincers and fuse - 85 l/min



Art. 908-0516-040 Connection hose \varnothing 20 mm M-M 1” 4 m lenght



Art. 095-5430-020 Suction hose kit \varnothing 25 mm, 2 m lenght



Art. 093-5200-000 Manual nozzle MC80 Flow rate 80 l/min




Art. 093-5210-000 Automatic nozzle PA60 Flow rate 70 l/min

Art. 093-5215-000 Automatic nozzle PA90 Flow rate 90 l/min

ELECTRIC PUMPS KIT FOR DIESEL TRANSFER "Battery Kit"



Ref.	Descrip.	Flow rate	Voltage	Power	Inlet-Outlet	Conn. Hose	Nozzle	Duty cycle	Weight	Packaging
		l/min	AC V./Hz DC Volt	W	BSPG	Ø		min	Kg	mm

090-5025-045	Battery kit	45	12	264	F1" - F1"	20	Manual	40	8,80	410X400X270
090-5025-060	Battery kit	60	12	336	F1" - F1"	20	Manual	40	10,15	410X400X270
090-5025-085	Battery kit	85	12	432	F1" - F1"	20	Manual	S2 30	13,10	410X400X270
090-5026-045	Battery kit	45	24	312	F1" - F1"	20	Manual	40	8,80	410X400X270
090-5026-060	Battery kit	60	24	432	F1" - F1"	20	Manual	40	10,15	410X400X270
090-5026-085	Battery kit	85	24	432	F1" - F1"	20	Manual	S2 30	13,10	410X400X270
090-5027-045	Battery kit	45	12	264	F1" - F1"	20	Aut.PA60	40	8,80	410X400X270
090-5027-060	Battery kit	60	12	336	F1" - F1"	20	Aut.PA60	40	10,15	410X400X270
090-5027-085	Battery kit	85	12	432	F1" - F1"	20	Aut.PA90	S2 30	13,50	410X400X270
090-5028-045	Battery kit	45	24	312	F1" - F1"	20	Aut.PA60	40	8,80	410X400X270
090-5028-060	Battery kit	60	24	432	F1" - F1"	20	Aut.PA60	40	10,15	410X400X270
090-5028-085	Battery kit	85	24	432	F1" - F1"	20	Aut.PA90	S2 30	13,50	410X400X270

Portable diesel transferring kit with 12V or 24V DC electric pump. It is useful when the distribution or the diesel fuel transfer are needed, but only the electric power supply of a battery is available.

“Barrel Kit” series composed by:



Art. 091-5080-045 12V Pump- power cable (sec. 2,5 mmq, 2 m lenght)
with pincers and fuse - 45 l/min

Art. 091-5082-045 24V Pump- power cable (sec. 2,5 mmq, 2 m lenght)
with pincers and fuse - 45 l/min



Art. 091-5081-060 12V Pump- power cable (sec. 4 mmq, 4 m lenght)
with pincers and fuse - 60 l/min

Art. 091-5083-060 24V Pump- power cable (sec. 4 mmq, 4 m lenght)
with pincers and fuse - 60 l/min



Art. 091-5081-085 12 V Pump- power cable (sec. 6 mmq, 4 m lenght)
with pincers and fuse - 85 l/min

Art. 091-5083-085 24 V Pump- power cable (sec. 6 mmq, 4 m lenght)
with pincers and fuse - 85 l/min



Art. 908-0516-040 Connection hose ø 20 mm M-M 1” 4 m lenght



Art. 095-5284-000 Telescopic suction hose with foot valve
M 1” 495<885 mm lenght



Art. 095-5280-609 M 1”- M 2” quick coupling



Art. 093-5200-000 Manual nozzle MC80 Flow rate 80 l/min



Art. 093-5210-000 Automatic nozzle PA60 Flow rate 70 l/min


Art. 093-5215-000 Automatic nozzle PA90 Flow rate 90 l/min



Art. 093-5300-000 Nozzle support bracket

ELECTRIC PUMPS KIT FOR DIESEL TRANSFER “Barrel Kit”



Ref.	Descrip.	Flow rate	Voltage	Power	Inlet-Outlet	Conn. Hose	Nozzle	Duty cycle	Weight	Packaging
		l/min	AC V./Hz DC Volt	W	BSPG	Ø		min	Kg	mm

090-5030-045	Barrel Kit	45	12	264	F1" - F1"	20	Manual	40	10,25	410X400X320
090-5030-060	Barrel Kit	60	12	336	F1" - F1"	20	Manual	40	11,70	410X400X320
090-5030-085	Barrel Kit	85	12	432	F1" - F1"	20	Manual	S2 30	14,50	410X400X320

090-5032-045	Barrel Kit	45	24	312	F1" - F1"	20	Manual	40	10,25	410X400X320
090-5032-060	Barrel Kit	60	24	432	F1" - F1"	20	Manual	40	11,70	410X400X320
090-5032-085	Barrel Kit	85	24	432	F1" - F1"	20	Manual	S2 30	14,50	410X400X320

090-5035-045	Barrel Kit	45	12	264	F1" - F1"	20	Aut.PA60	40	10,85	410X400X320
090-5035-060	Barrel Kit	60	12	336	F1" - F1"	20	Aut.PA60	40	12,30	410X400X320
090-5035-085	Barrel Kit	85	12	432	F1" - F1"	20	Aut.PA90	S2 30	15,40	410X400X320

090-5036-045	Barrel Kit	45	24	312	F1" - F1"	20	Aut.PA60	40	10,85	410X400X320
090-5036-060	Barrel Kit	60	24	432	F1" - F1"	20	Aut.PA60	40	12,30	410X400X320
090-5036-085	Barrel Kit	85	24	432	F1" - F1"	20	Aut.PA90	S2 30	15,40	410X400X320

Portable diesel transferring kit with 12V or 24V DC electric pump. It is useful when the distribution or the diesel fuel transfer are needed, but only the electric power supply of a battery is available.

“Barrel Kit” series composed by:



Art. 091-5080-045 12V Pump- power cable (sec. 2,5 mmq, 2 m lenght) with pincers and fuse - 45 l/min

Art. 091-5082-045 24V Pump- power cable (sec. 2,5 mmq, 2 m lenght) with pincers and fuse - 45 l/min



Art. 091-5081-060 12V Pump- power cable (sec. 4 mmq, 4 m lenght) with pincers and fuse - 60 l/min

Art. 091-5083-060 24V Pump- power cable (sec. 4 mmq, 4 m lenght) with pincers and fuse - 60 l/min



Art. 091-5081-085 12 V Pump- power cable (sec. 6 mmq, 4 m lenght) with pincers and fuse - 85 l/min

Art. 091-5083-085 24 V Pump- power cable (sec. 6 mmq, 4 m lenght) with pincers and fuse - 85 l/min



Art. 092-5103-000 Mechanical flow meter 3 digits F1” 120 l/min



Art. 908-0516-040 Connection hose ø 20 mm M-M 1” 4 m lenght



Art. 095-5284-000 Telescopic suction hose with foot valve M 1” 495<885 mm lenght



Art. 095-5280-609 M 1”- M 2” quick coupling



Art. 093-5200-000 Manual nozzle MC80 Flow rate 80 l/min



Art. 093-5210-000 Automatic nozzle PA60 Flow rate 70 l/min



Art. 093-5215-000 Automatic nozzle PA90 Flow rate 90 l/min



Art. 093-5300-000 Nozzle support bracket

ELECTRIC PUMPS KIT FOR DIESEL TRANSFER “Barrel Kit”



Ref.	Descrip.	Flow rate	Voltage	Power	Inlet-Outlet	Conn. hose	Nozzle	Flow meter	Duty cycle	Weight	Packaging
		l/min	AC V./Hz DC Volt	W	BSPG	Ø			min	Kg	mm

090-5037-M45	Barrel Kit	45	12	264	F1" - F1"	20	Manual	YES	40	12,70	550X400X320
090-5037-M60	Barrel Kit	60	12	336	F1" - F1"	20	Manual	YES	40	14,10	550X400X320
090-5037-M85	Barrel Kit	85	12	432	F1" - F1"	20	Manual	YES	S2 30	16,90	550X400X320

090-5038-M45	Barrel Kit	45	24	312	F1" - F1"	20	Manual	YES	40	12,70	550X400X320
090-5038-M60	Barrel Kit	60	24	432	F1" - F1"	20	Manual	YES	40	14,10	550X400X320
090-5038-M85	Barrel Kit	85	24	432	F1" - F1"	20	Manual	YES	S2 30	16,90	550X400X320

090-5037-045	Barrel Kit	45	12	264	F1" - F1"	20	Aut.PA60	YES	40	13,30	550X400X320
090-5037-060	Barrel Kit	60	12	336	F1" - F1"	20	Aut.PA60	YES	40	14,70	550X400X320
090-5037-085	Barrel Kit	85	12	432	F1" - F1"	20	Aut.PA90	YES	S2 30	17,80	550X400X320

090-5038-045	Barrel Kit	45	24	312	F1" - F1"	20	Aut.PA60	YES	40	13,30	550X400X320
090-5038-060	Barrel Kit	60	24	432	F1" - F1"	20	Aut.PA60	YES	40	14,70	550X400X320
090-5038-085	Barrel Kit	85	24	432	F1" - F1"	20	Aut.PA90	YES	S2 30	17,80	550X400X320

Transfer kit composed by electric vane pump 230V/115V, hose \varnothing 20 4 m lenght, suction hose \varnothing 25 2 m lenght complete with valve + filter, manual or automatic dispensing nozzle.

“Transfer Kit” series composed by:



Art. 091-5095-060 Electric pump 230V 50Hz 60 l/min

Art. 091-5098-070 Electric pump 230V 50Hz 70 l/min



Art. 091-5099-070 Electric pump 115V 60Hz 70 l/min



Art. 908-0516-040 Connection hose \varnothing 20 mm M-M 1" 4 m lenght



Art. 095-5440-020 Suction hose \varnothing 25 mm 2 m lenght




Art. 093-5202-000 Aluminium manual nozzle MC100 Flow rate 100 l/min



Art. 093-5210-000 Automatic nozzle PA60 Flow rate 70 l/min

ELECTRIC PUMPS KIT FOR DIESEL TRANSFER "Transfer Kit"



Ref.	Descrip.	Flow rate	Voltage	Power	Inlet-Outlet	Conn. Hose	Nozzle	Duty cycle	Weight	Packaging
		l/min	AC V./Hz DC Volt	W	BSPG	Ø		min	Kg	mm

090-5260-060	Transfer Kit	60	230/50	460	F1" - F1"	20	Manual	Contin.	10,30	410X400X270
090-5260-070	Transfer Kit	70	230/50	552	F1" - F1"	20	Manual	Contin.	11,20	410X400X270
090-5260-07X	Transfer Kit	70	115/60	575	F1" - F1"	20	Manual	Contin.	11,20	410X400X270
090-5262-060	Transfer Kit	60	230/50	460	F1" - F1"	20	Aut.PA60	Contin.	11,00	410X400X270
090-5262-070	Transfer Kit	70	230/50	552	F1" - F1"	20	Aut.PA60	Contin.	12,20	410X400X270
090-5262-07X	Transfer Kit	70	115/60	575	F1" - F1"	20	Aut.PA60	Contin.	12,20	410X400X270

Transfer kit composed by electric vane pump 230V / 115V, hose \varnothing 25 4 m lenght, suction hose \varnothing 25 2 m lenght complete with valve + filter, manual or automatic dispensing nozzle.

“Transfer Kit” series composed by:



Art. 091-5100-100 Electric Pump 230V 50Hz 100 l/min

Art. 091-5100-150 Electric Pump 230V 50Hz 150 l/min



Art. 091-5101-100 Electric pump 115V 60Hz 100 l/min



Art. 908-0616-040 Connection hose \varnothing 25 mm M-M 1" 4 m lenght



Art. 095-5440-020 Suction hose kit \varnothing 25 mm 2 m lenght




Art. 093-5202-000 Aluminium manual nozzle MC100 Flow rate 100 l/min



Art. 093-5220-000 Automatic nozzle PA120 Flow rate 120 l/min

ELECTRIC PUMPS KIT FOR DIESEL TRANSFER "Transfer Kit"



Ref.	Descrip.	Flow rate	Voltage	Power	Inlet-Outlet	Conn. hose	Nozzle	Duty cycle	Weight	Packaging
		l/min	AC V.Hz DC Volt	W	BSPG	Ø		min	Kg	mm

090-5300-100	Transfer Kit	100	230/50	805	F1" - F1"	25	Manual	Contin.	18,50	410X400X270
090-5300-150	Transfer Kit	150	230/50	1725	F1" - F1"	25	Manual	S2 30	21,60	410X400X270
090-5300-10X	Transfer Kit	100	115/60	977	F1" - F1"	25	Manual	Contin.	18,50	410X400X270
090-5302-100	Transfer Kit	100	230/50	805	F1" - F1"	25	Aut.PA120	Contin.	19,50	410X400X270
090-5302-150	Transfer Kit	150	230/50	1725	F1" - F1"	25	Aut.PA120	S2 30	22,60	410X400X270
090-5302-10X	Transfer Kit	100	115/60	977	F1" - F1"	25	Aut.PA120	Contin.	19,50	410X400X270

Kit for diesel transfer from drums and barrels through electric vane pump 230V / 115V.

The kit is composed by metallic telescopic hose for suction, 2” quick coupling for drum fixing, manual or automatic dispensing nozzle, with support bracket to facilitate the usage of the dispenser.

“Barrel Kit” series composed by:



Art. 091-5095-060 Electric pump 230V 50Hz 60 l/min

Art. 091-5098-070 Electric pump 230V 50Hz 70 l/min



Art. 091-5099-070 Electric pump 115V 50Hz 70 l/min



Art. 908-0516-040 Connection hose ø 20 mm M-M 1” 4 m length



Art. 095-5284-000 Telescopic suction hose with foot valve
M 1” 495<885 mm length



Art. 095-5280-609 M 1”- M 2” quick coupling



Art. 093-5202-000 Aluminium manual nozzle MC100 Flow rate 100 l/min




Art. 093-5210-000 Automatic nozzle PA60 Flow rate 70 l/min



Art. 093-5300-000 Nozzle support bracket

ELECTRIC PUMPS KIT FOR DIESEL TRANSFER “Barrel Kit”



Ref.	Descrip.	Flow rate	Voltage	Power	Inlet-Outlet	Conn. hose	Nozzle	Duty Cycle	Weight	Packaging
		l/min	AC V./Hz DC Volt	W	BSPG	Ø		min	Kg	mm

090-5039-M60	Barrel Kit	60	230/50	460	F1" - F1"	20	Man.	Contin.	12,80	410X400X320
090-5039-M70	Barrel Kit	70	230/50	552	F1" - F1"	20	Man.	Contin.	13,85	410X400X320
090-5039-M7X	Barrel Kit	70	115/60	575	F1" - F1"	20	Man.	Contin.	13,85	410X400X320
090-5039-060	Barrel Kit	60	230/50	460	F1" - F1"	20	Aut.PA60	Contin.	13,40	410X400X320
090-5039-070	Barrel Kit	70	230/50	552	F1" - F1"	20	Aut.PA60	Contin.	14,45	410X400X320
090-5039-07X	Barrel Kit	70	115/60	575	F1" - F1"	20	Aut.PA60	Contin.	14,45	410X400X320

Kit for diesel transfer from drums and barrels through electric vane pump 230V / 115V. The kit is composed by metallic telescopic hose for suction, mechanical flow meter, 2” quick coupling for drum fixing, manual or automatic dispensing nozzle, with support bracket to facilitate the usage of the dispenser.

“Barrel Kit” series composed by:



Art. 091-5095-060 Electric pump 230V 50Hz 60 l/min



Art. 091-5098-070 Electric pump 230V 50Hz 70 l/min



Art. 091-5099-070 Electric pump 115V 50Hz 70 l/min



Art. 092-5103-000 Mechanical flow meter 3 digits F1” 120 l/min



Art. 908-0516-040 Connection hose ø 20 mm M-M 1” 4 m lenght



Art. 095-5284-000 Telescopic suction hose with foot valve
M 1” 495<885 mm lenght



Art. 095-5280-609 M 1”- M 2” quick coupling



Art. 093-5202-000 Aluminium manual nozzle MC100 Flow rate 100 l/min





Art. 093-5210-000 Automatic nozzle PA60 Flow rate 70 l/min

Art. 093-5300-000 Nozzle support bracket

ELECTRIC PUMPS KIT FOR DIESEL TRANSFER “Barrel Kit”



Ref.	Descrip.	Flow rate	Voltage	Power	Inlet-Outlet	Conn. hose	Nozzle	Flow meter	Duty cycle	Weight	Packaging
		l/min	AC V./Hz DC Volt	W	BSPG	Ø			min	Kg	mm

090-5040-M60	Barrel Kit	60	230/50	460	F1" - F1"	20	Man.	YES	Contin.	15,00	550X400X320
090-5040-M70	Barrel Kit	70	230/50	552	F1" - F1"	20	Man.	YES	Contin.	15,90	550X400X320
090-5040-M7X	Barrel Kit	70	115/60	575	F1" - F1"	20	Man.	YES	Contin.	15,90	550X400X320
090-5040-060	Barrel Kit	60	230/50	460	F1" - F1"	20	Aut.PA60	YES	Contin.	15,60	550X400X320
090-5040-070	Barrel Kit	70	230/50	552	F1" - F1"	20	Aut.PA60	YES	Contin.	16,45	550X400X320
090-5040-07X	Barrel Kit	70	115/60	575	F1" - F1"	20	Aut.PA60	YES	Contin.	16,45	550X400X320

Centrifugal electric pump kit for diesel transfer. It is perfect for a quick and handy refuelling from barrels of diesel-powered vehicles. It is equipped with suction filter and integrated switch. It can be powered from electric line 230V / 115V and battery 12V / 24V.

It is connected to the barrel through M64x4 2” BSP.



“Dispenser Kit” series composed by:

Art. 091-5600-040 Electric pump 230V 50Hz 40 l/min

Art. 091-5602-040 Electric pump 115V 60Hz 40 l/min



Art. 091-5610-035 Electric pump 12V 35 l/min

Art. 091-5612-035 Electric pump 24 V 35 l/min



Art. 908-0500-040 Antistatic rubber hose for diesel \varnothing 19X27 mm 4 m lenght




Art. 093-5199-000 Plastic manual nozzle “MP120” Flow rate 120 l/min



Art. 093-5210-000 Automatic nozzle PA60 Flow rate 70 l/min

CENTRIFUGAL PUMP KIT FOR DIESEL TRANSFER “Dispenser Kit”



Ref.	Descrip.	Flow rate	Voltage	Power	Fixing to barrel	Conn. hose	Nozzle	Duty cycle	Weight	Packaging
		l/min	AC V./Hz DC Volt	W	BSPG	Ø		min	Kg	mm

090-5400-040	Dispenser kit	40	230/50	224	2"	19	Man.	Contin.	4,00	410x400x270
090-5400-04X	Dispenser kit	40	115/60	320	2"	19	Man.	Contin.	4,00	410x400x270
090-5400-Y35	Dispenser kit	35	12	110	2"	19	Man.	Contin.	4,00	410x400x270
090-5400-Z35	Dispenser kit	35	24	135	2"	19	Man.	Contin.	4,00	410x400x270
090-5401-040	Dispenser kit	40	230/50	224	2"	19	Aut.PA60	Contin.	5,10	410x400x270
090-5401-04X	Dispenser kit	40	115/60	320	2"	19	Aut.PA60	Contin.	5,10	410x400x270
090-5401-Y35	Dispenser kit	35	12	110	2"	19	Aut.PA60	Contin.	5,10	410x400x270
090-5401-Z35	Dispenser kit	35	24	135	2"	19	Aut.PA60	Contin.	5,10	410x400x270

Centrifugal electric pump kit for diesel transfer. It is perfect for a quick and handy refuelling from barrels of diesel-powered vehicles. It is equipped with suction filter and integrated switch. It can be powered from electric line 230V / 115V and battery 12V / 24V.

It is connected to the barrel through M64x4 2” BSP.



“Dispenser Kit” series composed by

Art. 091-5600-040 Electric pump 230V 50Hz 40 l/min

Art. 091-5602-040 Electric pump 115V 60Hz 40 l/min



Art. 091-5610-035 Electric pump 12V 35 l/min

Art. 091-5612-035 Electric pump 24 V 35 l/min



Art. 092-5124-000 Digital turbine flow meter MEC 24
min/max flow rate 7/120 l/min



Art. 908-0500-040 Antistatic rubber hose for diesel \varnothing 19X27 mm 4 m length





Art. 093-5199-000 Plastic manual nozzle “MP120” Flow rate 120 l/min



Art. 093-5210-000 Automatic nozzle PA60 Flow rate 70 l/min

CENTRIFUGAL PUMP KIT FOR DIESEL TRANSFER “Dispenser Kit”



Ref.	Descrip.	Flow rate	Voltage	Power	Fixing to barell	Conn. hose	Nozzle	Flow meter	Duty cycle	Wei-ght	Packaging
		l/min	AC V./Hz DC Volt	W	BSPG	Ø			min	Kg	mm

090-5402-040	Dispenser kit	40	230/50	224	2"	19	Man	YES	Contin.	4,45	410x400x270
090-5402-04X	Dispenser kit	40	115/60	320	2"	19	Man.	YES	Contin.	4,45	410x400x270
090-5402-Y35	Dispenser kit	35	12	110	2"	19	Man.	YES	Contin.	4,45	410x400x270
090-5402-Z35	Dispenser kit	35	24	135	2"	19	Man.	YES	Contin.	4,45	410x400x270
090-5403-040	Dispenser kit	40	230/50	224	2"	19	Aut.PA60	YES	Contin.	5,45	410x400x270
090-5403-04X	Dispenser kit	40	115/60	320	2"	19	Aut.PA60	YES	Contin.	5,45	410x400x270
090-5403-Y35	Dispenser kit	35	12	110	2"	19	Aut.PA60	YES	Contin.	5,45	410x400x270
090-5403-Z35	Dispenser kit	35	24	135	2"	19	Aut.PA60	YES	Contin.	5,45	410x400x270

Diesel transferring kit for private use. It allows the quick and safe filling of the vehicles.
All the accessories to complement the dispenser are available.

“Compact” composed by:



Art. 091-5081-045 12V Pump - power cable (sec. 4 mmq, 4 m lenght) with pincers and fuse - 45 l/min



Art. 091-5083-045 24V Pump- power cable (sec. 4 mmq, 4 m lenght) con pincers and fuse - 45 l/min



Art. 091-5081-060 12V Pump- power cable (sec. 4 mmq, 4 m lenght) with pincers and fuse - 60 l/min



Art. 091-5083-060 24V Pump- power cable (sec. 4 mmq, 4 m lenght) with pincers and fuse - 60 l/min

Art. 091-5095-060 Electric pump 230V 50Hz 60 l/min

Art. 091-5098-070 Electric pump 230V 50Hz 70 l/min

Art. 091-5100-100 Electric pump 230V 50Hz 100 l/min



Art. 908-0516-040 Connection hose \varnothing 20 mm M-M 1" 4 m lenght



Art. 908-0616-040 Connection hose \varnothing 25 mm M-M 1" 4 m lenght



Art. 093-5202-000 Aluminium manual nozzle MC100 Flow rate 100 l/min



Art. 093-5210-000 Automatic nozzle PA60 Flow rate 70 l/min

Art. 093-5220-000 Automatic nozzle PA120 Flow rate 120 l/min

OPTIONAL:



Cartridge filter **page 93**




Suction hose kit **page 95**



Art. 090-5056-000 Cabinet for pump unit

WALL DISPENSER FOR DIESEL TRANSFER "Compact"

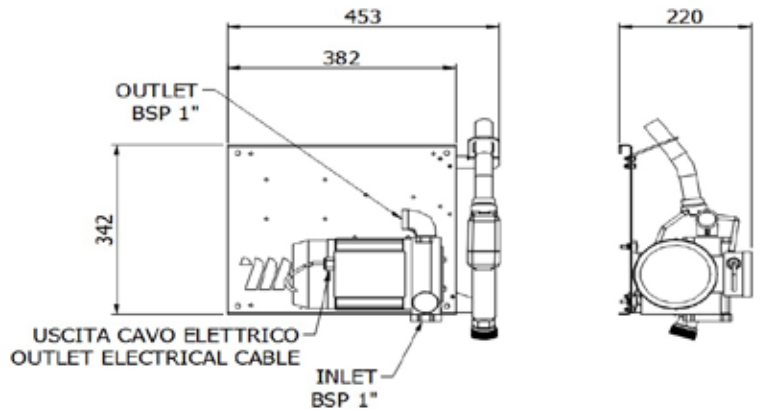

Ref.	Descrip.	Flow rate	Voltage	Power	Inlet-outlet	Conn. hose	Nozzle	Duty cycle	Weight	Packaging
		l/min	AC V/Hz DC Volt	W	BSPG	∅		min	Kg	mm

090-5043-060	Compact	60	230/50	460	F1" - F1"	20	Aut.PA60	Contin.	13,75	410X400X320
090-5043-070	Compact	70	230/50	552	F1" - F1"	20	Aut.PA60	Contin.	15,10	410X400X320
090-5043-100	Compact	100	230/50	805	F1" - F1"	25	Aut.PA120	Contin.	22,60	410X400X320

090-5044-060	Compact	60	230/50	460	F1" - F1"	20	Man.	Contin.	13,10	410X400X320
090-5044-070	Compact	70	230/50	552	F1" - F1"	20	Man.	Contin.	14,10	410X400X320
090-5044-100	Compact	100	230/50	805	F1" - F1"	25	Man.	Contin.	21,60	410X400X320

090-5043-07X	Compact	70	115/60	575	F1" - F1"	20	Aut.PA60	Contin.	15,10	410X400X320
090-5043-10X	Compact	100	115/60	977	F1" - F1"	25	Aut.PA120	Contin.	22,60	410X400X320

090-5044-07X	Compact	70	115/60	575	F1" - F1"	20	Man.	Contin.	14,10	410X400X320
090-5044-10X	Compact	100	115/60	977	F1" - F1"	25	Man.	Contin.	21,60	410X400X320

090-5043-Y45	Compact	45	12	264	F1" - F1"	20	Aut.PA60	40	11,50	410X400X320
090-5043-Z45	Compact	45	24	312	F1" - F1"	20	Aut.PA60	40	11,50	410X400X320

090-5043-Y60	Compact	60	12	336	F1" - F1"	20	Aut.PA60	40	13,00	410X400X320
090-5043-Z60	Compact	60	24	432	F1" - F1"	20	Aut.PA60	40	13,00	410X400X320

090-5044-Y45	Compact	45	12	264	F1" - F1"	20	Man.	40	11,00	410X400X320
090-5044-Z45	Compact	45	24	312	F1" - F1"	20	Man.	40	11,00	410X400X320

090-5044-Y60	Compact	60	12	336	F1" - F1"	20	Man.	40	12,50	410X400X320
090-5044-Z60	Compact	60	24	432	F1" - F1"	20	Man.	40	12,50	410X400X320

Diesel transferring kit for private use. It allows the quick and safe filling of the vehicles.

It also permits to measure and record the dispensed quantities.

All the accessories to complement the dispenser are available.

“Compact” series composed by:



Art. 091-5081-045 12V Pump - power cable (sec. 4 mmq, 4 m lenght) with pincers and fuse - 45 l/min



Art. 091-5083-045 24V Pump - power cable (sec. 4 mmq, 4 m lenght) with pincers and fuse- 45 l/min



Art. 091-5081-060 12V Pump - power cable(sec. 4 mmq, 4 m lenght) with pincers and fuse - 60 l/min



Art. 091-5083-060 24V Pump- power cable (sec. 4 mmq, 4 m lenght) with pincers and fuse - 60 l/min



Art. 091-5095-060 Electric pump 230V 50Hz 60 l/min

Art. 091-5098-070 Electric pump 230V 50Hz 70 l/min

Art. 091-5100-100 Electric pump 230V 50Hz 100 l/min



Art. 091-5099-070 Electric pump 115V 60Hz 70 l/min

Art. 091-5101-100 Electric pump 115V 60Hz 100 l/min



Art. 908-0516-040 Connection hose ø 20 mm M-M 1” 4 m lenght

Art. 908-0616-040 Connection hose ø 25 mm M-M 1” 4 m lenght



Art. 093-5202-000 Aluminium manual nozzle MC100 Flow rate 100 l/min

Art. 093-5210-000 Automatic nozzle PA60 Flow rate 70 l/min

Art. 093-5220-000 Automatic nozzle PA120 Flow rate 120 l/min



Art. 092-5103-000 Mechanical flow meter 3 digits F1” 120 l/min 3C

Art. 092-5104-000 Mechanical flow meter 4 digits F1” 120 l/min 4C



OPTIONAL:


Cartridge filter page 93



Suction hose kit page 95

Art. 090-5056-000 Cabinet for pump unit

WALL DISPENSER FOR DIESEL TRANSFER "Compact"

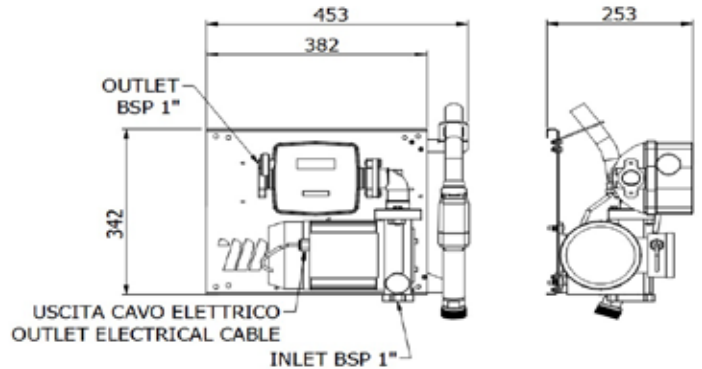

Ref.	Descrip.	Flow rate l/min	Voltage AC V/Hz DC Volt	Power W	Inlet-outlet BSPG	Conn. hose Ø	Nozzle	Flow meter	Duty cycle min	Weight Kg	Packaging mm
------	----------	--------------------	-------------------------------	------------	----------------------	-----------------	--------	------------	-------------------	--------------	-----------------

090-5045-060	Compact	60	230/50	460	F1" - F1"	20	AutPA60	3C	Contin.	16,00	410X400X320
090-5045-070	Compact	70	230/50	552	F1" - F1"	20	AutPA60	3C	Contin.	17,00	410X400X320
090-5045-100	Compact	100	230/50	805	F1" - F1"	25	AutPA120	4C	Contin.	22,00	410X400X320
090-5046-060	Compact	60	230/50	460	F1" - F1"	20	Manual	3C	Contin.	15,50	410X400X320
090-5046-070	Compact	70	230/50	552	F1" - F1"	20	Manual	3C	Contin.	16,50	410X400X320
090-5046-100	Compact	100	230/50	805	F1" - F1"	25	Manual	4C	Contin.	21,50	410X400X320
090-5045-07X	Compact	70	115/60	575	F1" - F1"	20	AutPA60	3C	Contin.	17,00	410X400X320
090-5045-10X	Compact	100	115/60	977	F1" - F1"	25	AutPA120	4C	Contin.	22,00	410X400X320
090-5046-07X	Compact	70	115/60	575	F1" - F1"	20	Manual	3C	Contin.	16,50	410X400X320
090-5046-10X	Compact	100	115/60	977	F1" - F1"	25	Manual	4C	Contin.	21,50	410X400X320
090-5045-Y45	Compact	45	12	264	F1" - F1"	20	AutPA60	3C	40	13,70	410X400X320
090-5045-Z45	Compact	45	24	312	F1" - F1"	20	AutPA60	3C	40	13,70	410X400X320
090-5045-Y60	Compact	60	12	336	F1" - F1"	20	AutPA60	3C	40	15,20	410X400X320
090-5045-Z60	Compact	60	24	432	F1" - F1"	20	AutPA60	3C	40	15,20	410X400X320
090-5046-Y45	Compact	45	12	264	F1" - F1"	20	Manual	3C	40	13,00	410X400X320
090-5046-Z45	Compact	45	24	312	F1" - F1"	20	Manual	3C	40	13,00	410X400X320
090-5046-Y60	Compact	60	12	336	F1" - F1"	20	Manual	3C	40	14,50	410X400X320
090-5046-Z60	Compact	60	24	432	F1" - F1"	20	Manual	3C	40	14,50	410X400X320

Diesel transferring kit for private use. It allows the quick and safe filling of the vehicles.
It also permits to measure and record the dispensed quantities.
All the accessories to complement the dispenser are available.

“Compact” series composed by:



Art. 091-5081-045 12V Pump - power cable (sec. 4 mmq, 4 m lenght) with pincers and fuse - 45 l / min



Art. 091-5083-045 24V Pump - power cable (sec. 4 mmq, 4 m lenght) with pincers and fuse - 45 l / min



Art. 091-5081-060 12V Pump - power cable (sec. 4 mmq, 4 m lenght) with pincers and fuse - 60 l / min



Art. 091-5083-060 24V Pump - power cable (sec. 4 mmq, 4 m lenght) with pincers and fuse - 60 l / min

Art. 091-5095-060 Electric pump 230V 50Hz 60 l/min

Art. 091-5098-070 Electric pump 230V 50Hz 70 l/min

Art. 091-5100-100 Electric pump 230V 50Hz 100 l/min



Art. 908-0516-040 Connection hose Ø 20 mm M-M 1” 4 m lenght

Art. 908-0616-040 Connection hose Ø 25 mm M-M 1” 4 m lenght



Art. 093-5210-000 Automatic nozzle PA60 Flow rate 70 l/min

Art. 093-5220-000 Automatic nozzle PA120 Flow rate 120 l/min



Art. 092-5103-000 Mechanical flow meter 3 digits F1” 120 l/min 3C

Art. 092-5104-000 Mechanical flow meter 4 digits F1” 120 l/min 4C



Art. 094-5240-000 Water separating delivery filter for diesel 70 l/min

Art. 094-5245-000 Water separating delivery filter for diesel 150 l/min

OPTIONAL:




Suction hose kit page 95



Art. 090-5056-000 Cabinet

WALL DISPENSER FOR DIESEL TRANSFER "Compact"

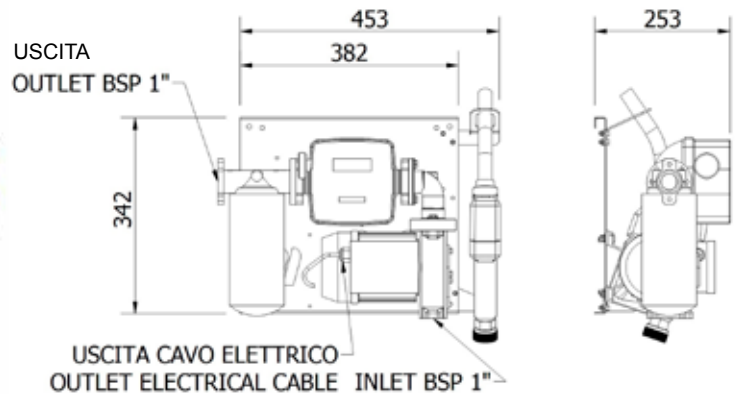

Ref.	Descrip.	Flow Rate	Voltage	Power	Inlet-Outlet	Conn. Hose	Nozzle	Flow meter/Filter	Duty Cycle	Weight	Packaging
		l/min	AC V/Hz DC Volt	W	BSPG	Ø			min	Kg	mm

090-5047-060	Compact	60	230/50	460	F1" - F1"	20	Aut.PA60	YES3C	Contin.	20,50	550X400X320
090-5047-070	Compact	70	230/50	552	F1" - F1"	20	Aut.PA60	YES3C	Contin.	21,50	550X400X320
090-5047-100	Compact	100	230/50	805	F1" - F1"	25	Aut.PA120	YES4C	Contin.	26,50	550X400X320
090-5047-07X	Compact	70	115/60	575	F1" - F1"	20	Aut.PA60	YES3C	Contin.	21,50	550X400X320
090-5047-10X	Compact	100	115/60	977	F1" - F1"	25	Aut.PA120	YES4C	Contin.	26,50	550X400X320
090-5047-Y45	Compact	45	12	264	F1" - F1"	20	Aut.PA60	YES3C	40	18,20	550X400X320
090-5047-Z45	Compact	45	24	312	F1" - F1"	20	Aut.PA60	YES3C	40	18,20	550X400X320
090-5047-Y60	Compact	60	12	336	F1" - F1"	20	Aut.PA60	YES3C	40	19,70	550X400X320
090-5047-Z60	Compact	60	24	432	F1" - F1"	20	Aut.PA60	YES3C	40	19,70	550X400X320

Diesel transferring kit for private use. It allows the quick and safe filling of the vehicles.
It also permits to measure and record the dispensed quantities.

“Wall Mec” series composed by:



Art. 091-5095-060 Electric pump 230V 50Hz 60 l/min

Art. 091-5098-070 Electric pump 230V 50Hz 70 l/min

Art. 091-5100-100 Electric pump 230V 50Hz 100 l/min



Art. 091-5099-070 Electric pump 115V 60Hz 70 l/min

Art. 091-5101-100 Electric pump 115V 60Hz 100 l/min



Art. 908-0516-060 Connection hose \varnothing 20 mm M-M 1" 6 m length

Art. 908-0616-060 Connection hose \varnothing 25 mm M-M 1" 6 m length



Art. 093-5210-000 Automatic nozzle PA60 Flow rate 70 l/min

Art. 093-5220-000 Automatic nozzle PA120 Flow rate 120 l/min




Art. 092-5103-000 Mechanical flow meter 3 digits F1" 120 l/min 3C

Art. 092-5104-000 Mechanical flow meter 4 digits F1" 120 l/min 4C



Art. 095-5440-040 Suction hose kit with valve \varnothing 25, 4 m length

WALL DISPENSER FOR DIESEL TRANSFER "Wall Mec"

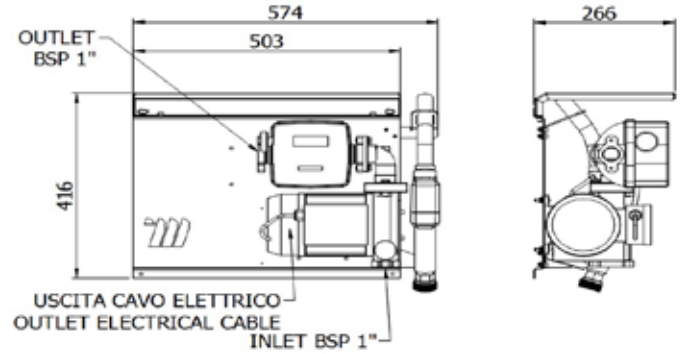

Ref.	Descrip.	Flow rate	Voltage	Power	Inlet-outlet	Conn. hose	Nozzle	Flow meter	Duty cycle	Weight	Packaging
		l/min	AC V./Hz DC Volt	W	BSPG	Ø			min	Kg	mm

Without suction hose kit

090-5048-060	Wall Mec	60	230/50	460	F1" - F1"	20	Aut.PA60	3C	Contin.	19,00	550X400X320
090-5048-070	Wall Mec	70	230/50	552	F1" - F1"	20	Aut.PA60	3C	Contin.	20,50	550X400X320
090-5048-100	Wall Mec	100	230/50	805	F1" - F1"	25	Aut.PA120	4C	Contin.	25,50	550X400X320
090-5048-07X	Wall Mec	70	115/60	575	F1" - F1"	20	Aut.PA60	3C	Contin.	20,50	550X400X320
090-5048-10X	Wall Mec	100	115/60	977	F1" - F1"	25	Aut.PA120	4C	Contin.	25,50	550X400X320

With suction hose kit ref. 095-5440-040

090-5148-060	Wall Mec	60	230/50	460	F1" - F1"	20	Aut.PA60	3C	Contin.	20,50	550X400X320
090-5148-070	Wall Mec	70	230/50	552	F1" - F1"	20	Aut.PA60	3C	Contin.	21,70	550X400X320
090-5148-100	Wall Mec	100	230/50	805	F1" - F1"	25	Aut.PA120	4C	Contin.	26,70	550X400X320
090-5148-07X	Wall Mec	70	115/60	575	F1" - F1"	20	Aut.PA60	3C	Contin.	21,70	550X400X320
090-5148-10X	Wall Mec	100	115/60	977	F1" - F1"	25	Aut.PA120	4C	Contin.	26,70	550X400X320

Diesel transferring kit for private use. It allows the quick and safe filling of the vehicles.
It also permits to measure and record the dispensed quantities.

“Wall Mec” series composed by:



Art. 091-5095-060 Electric pump 230V 50Hz 60 l/min

Art. 091-5098-070 Electric pump 230V 50Hz 70 l/min

Art. 091-5100-100 Electric pump 230V 50Hz 100 l/min



Art. 091-5099-070 Electric pump 115V 60Hz 70 l/min

Art. 091-5101-100 Electric pump 115V 60Hz 100 l/min



Art. 908-0516-060 Connection hose \varnothing 20 mm M-M 1" 6 m length

Art. 908-0616-060 Connection hose \varnothing 25 mm M-M 1" 6 m length



Art. 093-5210-000 Automatic nozzle PA60 Flow rate 70 l/min

Art. 093-5220-000 Automatic nozzle PA120 Flow rate 120 l/min



Art. 092-5103-000 Mechanical flow meter 3 digits F1" 120 l/min 3C

Art. 092-5104-000 Mechanical flow meter 4 digits F1" 120 l/min 4C




Art. 094-5240-000 Water separating delivery filter for diesel 70 l/min

Art. 094-5245-000 Water separating delivery filter for diesel 150 l/min



Art. 095-5440-040 Suction hose kit with valve \varnothing 25, 4 m length

WALL DISPENSER FOR DIESEL TRANSFER "Wall Mec"

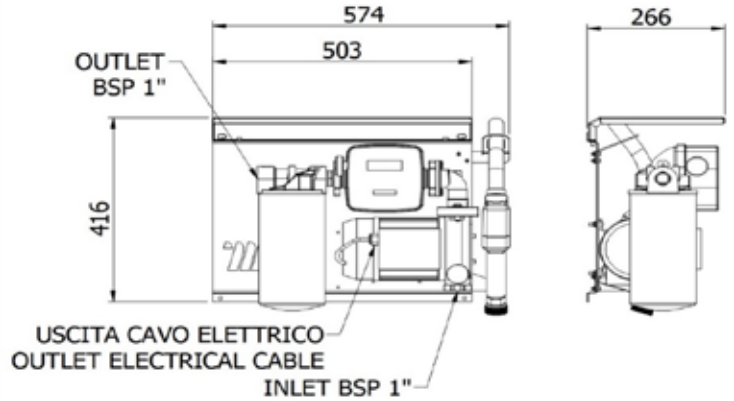

Ref.	Descrip.	Flow rate	Voltage	Power	Inlet-outlet	Conn. hose	Nozzle	Flow meter/Filter	Duty cycle	Weight	Packaging
		l/min	AC V./Hz DC Volt	W	BSPG	Ø			min	Kg	mm

Without suction hose kit

090-5049-060	Wall Mec	60	230/50	460	F1" - F1"	20	Aut.PA60	YES3C	Contin.	20,20	550X400X320
090-5049-070	Wall Mec	70	230/50	552	F1" - F1"	20	Aut.PA60	YES3C	Contin.	22,75	550X400X320
090-5049-100	Wall Mec	100	230/50	805	F1" - F1"	25	Aut.PA120	YES4C	Contin.	27,75	550X400X320
090-5049-07X	Wall Mec	70	115/60	575	F1" - F1"	20	Aut.PA60	YES3C	Contin.	22,75	550X400X320
090-5049-10X	Wall Mec	100	115/60	977	F1" - F1"	25	Aut.PA120	YES4C	Contin.	27,75	550X400X320

With suction hose kit Cod. 095-5440-040

090-5149-060	Wall Mec	60	230/50	460	F1" - F1"	20	Aut.PA60	YES3C	Contin.	21,70	550X400X320
090-5149-070	Wall Mec	70	230/50	552	F1" - F1"	20	Aut.PA60	YES3C	Contin.	24,00	550X400X320
090-5149-100	Wall Mec	100	230/50	805	F1" - F1"	25	Aut.PA120	YES4C	Contin.	29,00	550X400X320
090-5149-07X	Wall Mec	70	115/60	575	F1" - F1"	20	Aut.PA60	YES3C	Contin.	24,00	550X400X320
090-5149-10X	Wall Mec	100	115/60	977	F1" - F1"	25	Aut.PA120	YES4C	Contin.	29,00	550X400X320

Solid cabinet in anti-corrosion painted steel complete with key lock. The pump is inside the cabinet with anti-vibration supports. It is equipped with nozzle holder, microswitch to turn it on/off, automatic nozzle with swiveling joint. Diesel transfer system for private usage, it allows the quick and safe filling of vehicles, and permits to measure and record the dispensed quantities.

“Meclube Box” series composed by:



Art. 091-5095-060 Electric pump 230V 50Hz 60 l/min

Art. 091-5098-070 Electric pump 230V 50Hz 70 l/min

Art. 091-5100-100 Electric pump 230V 50Hz 100 l/min



Art. 091-5099-070 Electric pump 115V 60Hz 70 l/min

Art. 091-5101-100 Electric pump 115V 60Hz 100 l/min



Art. 908-0516-060 Connection hose ø 20 mm M-M 1” 6 m lenght

Art. 908-0616-060 Connection hose ø 25 mm M-M 1” 6 m lenght



Art. 093-5210-000 Automatic nozzle PA60 Flow rate 70 l/min

Art. 093-5220-000 Automatic nozzle PA120 Flow rate 120 l/min



Art. 092-5103-000 Mechanical flow meter 3 digits F1” 120 l/min 3C

Art. 092-5104-000 Mechanical flow meter 4 digits F1” 120 l/min 4C



Art. 094-5240-000 Water separating delivery filter for diesel 70 l/min

Art. 094-5245-000 Water separating delivery filter for diesel 150 l/min



Art. 090-5056-000 Cabinet



OPTIONAL:



Suction hose kit **page 95**


CABINET DISPENSER FOR DIESEL TRANSFER “Meclube Box”



Ref.	Descrip.	Flow rate	Voltage	Power	Inlet-Outlet	Conn. hose	Nozzle	Flow meter/Filter	Duty cycle	Weight	Packaging
		l/min	AC V./Hz DC Volt	W	BSPG	Ø			min	Kg	mm

090-5050-060	Meclube box	60	230/50	460	F1" - F1"	20	Aut.PA60	YES 3C	Contin.	46,00	615X375X605
090-5050-070	Meclube box	70	230/50	552	F1" - F1"	20	Aut.PA60	YES 3C	Contin.	47,00	615X375X605
090-5050-100	Meclube box	100	230/50	805	F1" - F1"	25	Aut.PA120	YES 4C	Contin.	49,00	615X375X605

090-5050-07X	Meclube box	70	115/60	575	F1" - F1"	20	Aut.PA60	YES 3C	Contin.	47,00	615X375X605
090-5050-10X	Meclube box	100	115/60	977	F1" - F1"	25	Aut.PA120	YES 4C	Contin.	49,00	615X375X605

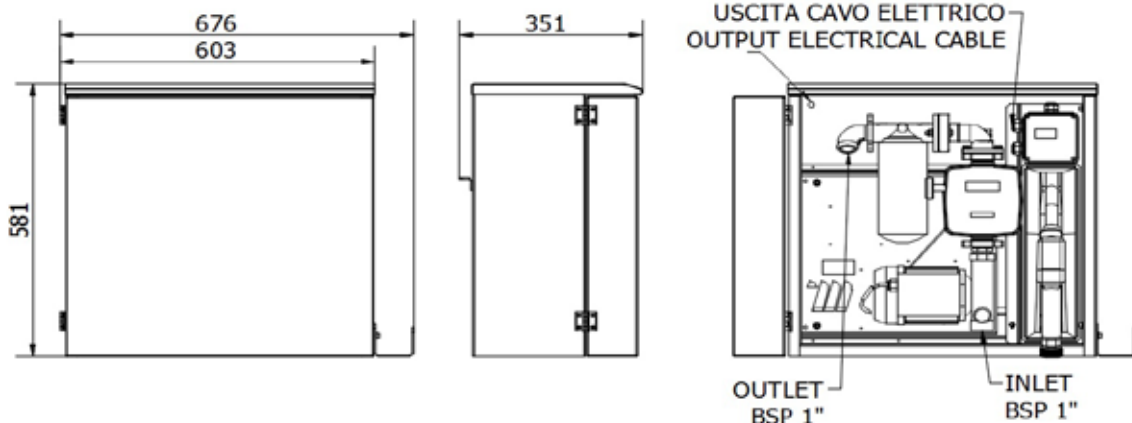

The Mec-Reel manufactured by Meclube is a dispatching group composed by an automatic hose reel with 15 m hose, pump with continuous power, water filter in suction and automatic nozzle, all components are integrated in a strong support. The Mec-Reel can be easily installed due to its compactness and versatility. It is the perfect solution to complete tanks or for mobile units.

“Mec-Reel” series composed by:



Art. 091-5081-060 12V Pump - power cable (sec. 4 mmq. m 4 lenght)
with pincers and fuse - 60 l/min

Art. 091-5083-060 24V Pump - power cable (sec. 4 mmq. m 4 lenght)
with pincers and fuse - 60 l/min



Art. 070-1408-515 Automatic fixed diesel hose reel 10 bar
Hose lenght 15 m - Ø hose 3/4” - Inlet/Outlet G 1”



Art. 093-5210-000 Automatic nozzle PA60 flow rate 70 l/min




Art. 094-5240-000 Water separating delivery filter for diesel 70 l/min

“Mec-Reel” DISTRIBUTOR



Ref.	Description	Flow rate l/min	Voltage DC Volt	Power W	Inlet BSPG	Hose Reel	Nozzle	Filter	Weight Kg	Packaging mm
										

090-5060-Y60	Mec-Reel	60	12	336	F1"	Ø 3/4"-15 m	Aut.PA60	YES	57,5	475x670x840
090-5060-Z60	Mec-Reel	60	24	432	F1"	Ø 3/4"-15 m	Aut.PA60	YES	57,5	475x670x840

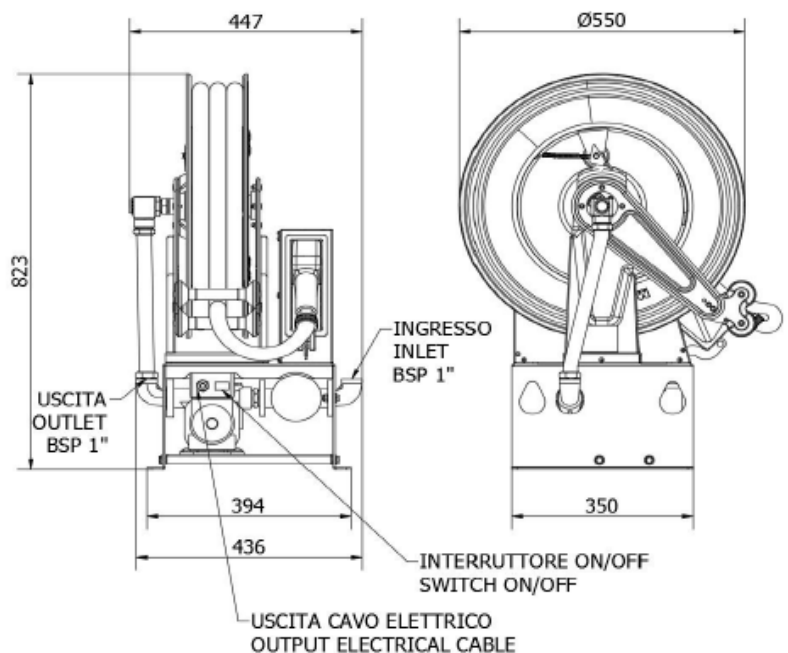

Diesel transfer system for private usage, it allows the quick and safe filling of vehicles, and permits to measure and record the dispensed quantities. It is equipped with nozzle holder, microswitch to turn the pump on/off, automatic nozzle with swiveling joint, and extractable hose support. The equipment can be fixed to the wall, to a tank or to its own support column.

“Cami Dispenser” series composed by:



Art. 091-5081-060 12V Pump - power cable (sec. 4 mmq, 4 m lenght) with pincers and fuse- 60 l/min

Art. 091-5083-060 24V Pump - power cable (sec. 4 mmq, 4 m lenght) with pincers and use carrier - 60 l/min



Art. 091-5095-060 Electric pump 230V 50Hz 60 l/min

Art. 091-5098-070 Electric pump 230V 50Hz 70 l/min

Art. 091-5100-100 Electric pump 230V 50Hz 100 l/min



Art. 091-5099-070 Electric pump 115V 60Hz 70 l/min

Art. 091-5101-100 Electric pump 115V 60Hz 100 l/min



Art. 908-0516-040 Connection hose ø 20 mm M-M 1” 4 m lenght

Art. 908-0616-040 Connection hose ø 25 mm M-M 1” 4 m lenght



Art. 093-5210-000 Automatic nozzle PA60 Flow rate 70 l/min

Art. 093-5220-000 Automatic nozzle PA120 Flow rate 120 l/min



Art. 092-5103-000 Mechanical flow meter 3 digits F1” 120 l/min - 3C

Art. 092-5104-000 Mechanical flow meter 4 digits F1” 120 l/min - 4C

OPTIONAL:



Art. 090-5072-000 Support column Cami-Dispenser





Art. 094-5240-000 Water separating delivery filter for diesel 70 l/min

Art. 094-5245-000 Water separating delivery filter for diesel 150 l/min

DIESEL TRANSFER SYSTEM "Cami Dispenser"




Ref.	Descrip.	Flow rate	Voltage	Power	Inlet-Outlet	Conn. hose	Nozzle	Flow meter	Duty cycle	Weight	Packaging
		l/min	AC V./Hz DC Volt	W	BSPG	Ø			min	Kg	mm

090-5070-060	Cami Dispenser	60	230/50	460	F1" - F1"	20	Aut.PA60	3C	Contin.	26,00	505X355X425
090-5070-070	Cami Dispenser	70	230/50	552	F1" - F1"	20	Aut.PA60	3C	Contin.	27,00	505X355X425
090-5070-100	Cami Dispenser	100	230/50	805	F1" - F1"	25	Aut.PA120	4C	Contin.	33,00	505X355X425

090-5070-07X	Cami Dispenser	70	115/60	575	F1" - F1"	20	Aut.PA60	3C	Contin.	27,00	505X355X425
090-5070-10X	Cami Dispenser	100	115/60	977	F1" - F1"	25	Aut.PA120	4C	Contin.	33,00	505X355X425

090-5070-Y60	Cami Dispenser	60	12	336	F1" - F1"	20	Aut.PA60	3C	40	26,00	505X355X425
090-5070-Z60	Cami Dispenser	60	24	432	F1" - F1"	20	Aut.PA60	3C	40	26,00	505X355X425

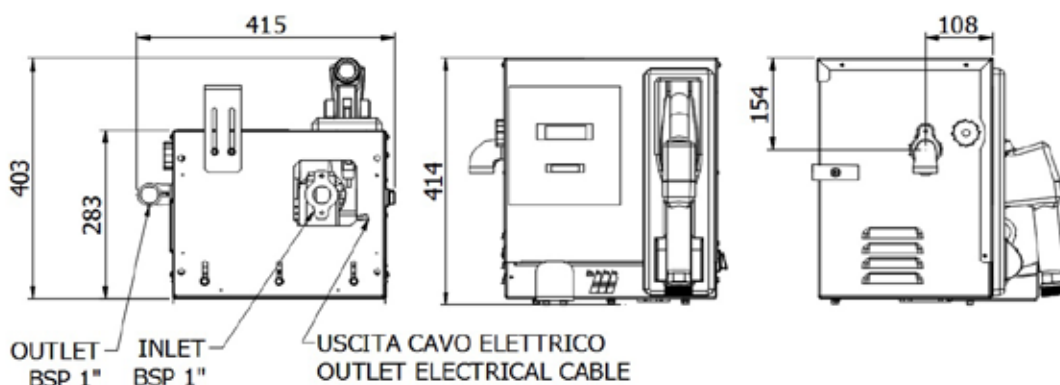

Diesel transfer system for private usage, it allows the quick and safe filling of vehicles, and permits to measure and record the dispensed quantities. It is equipped with nozzle holder, microswitch to turn the pump on/off, automatic nozzle with swiveling joint, and extractable hose support. The equipment can be fixed to the ground.

“Cami Dispenser” series composed by:



Art. 091-5081-060 12V Pump - power cable (sec. 4 mmq, 4 m lenght) with pincers and fuse - 60 l/min

Art. 091-5083-060 24V Pump - power cable (sec. 4 mmq, 4 m lenght) with pincers and fuse - 60 l/min



Art. 091-5095-060 Electric pump 230V 50Hz 60 l/min

Art. 091-5098-070 Electric pump 230V 50Hz 70 l/min

Art. 091-5100-100 Electric pump 230V 50Hz 100 l/min



Art. 091-5099-070 Electric pump 115V 60Hz 70 l/min

Art. 091-5101-100 Electric pump 115V 60Hz 100 l/min



Art. 908-0516-040 Connection hose ø 20 mm M-M 1” 4 m lenght

Art. 908-0616-040 Connection hose ø 25 mm M-M 1” 4 m lenght



Art. 093-5210-000 Automatic nozzle PA60 Flow rate 70 l/min

Art. 093-5220-000 Automatic nozzle PA120 Flow rate 120 l/min



Art. 092-5103-000 Mechanical flow meter 3 digits F1” 120 l/min - 3C

Art. 092-5104-000 Mechanical flow meter 4 digits F1” 120 l/min - 4C




OPTIONAL:

Art. 094-5240-000 Water separating delivery filter for diesel 70 l/min

Art. 094-5245-000 Water separating delivery filter for diesel 150 l/min

DIESEL TRANSFER SYSTEM "Cami Dispenser"

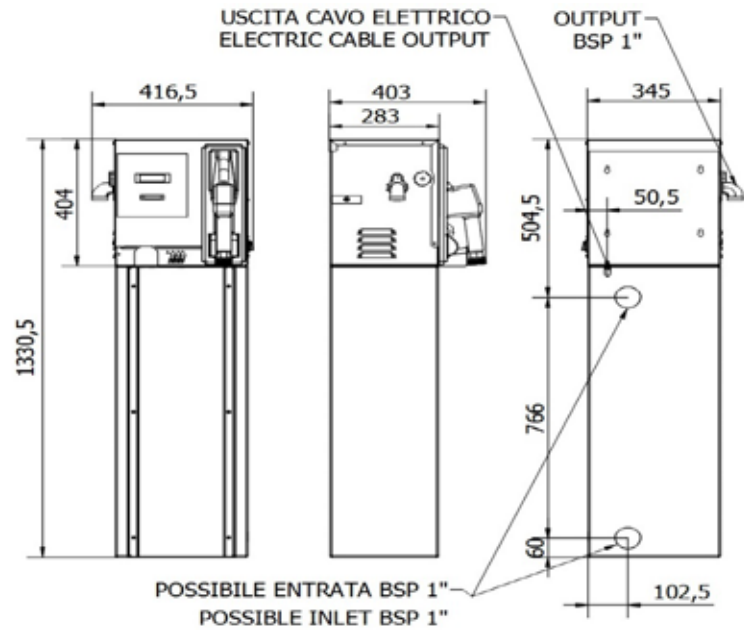

Ref.	Descrip.	Flow rate l/min	Voltage AC V./Hz DC Volt	Power W	Inlet-Outlet BSPG	Conn. hose Ø	Nozzle	Flow meter	Duty cycle min	Weight Kg
------	----------	--------------------	--------------------------------	------------	----------------------	-----------------	--------	------------	-------------------	--------------

090-5072-060	Cami Dispenser	60	230/50	460	F1" - F1"	20	Aut.PA60	3C	Contin.	49,50
090-5072-070	Cami Dispenser	70	230/50	552	F1" - F1"	20	Aut.PA60	3C	Contin.	50,50
090-5072-100	Cami Dispenser	100	230/50	805	F1" - F1"	25	Aut.PA120	4C	Contin.	56,50

090-5072-07X	Cami Dispenser	70	115/60	575	F1" - F1"	20	Aut.PA60	3C	Contin.	50,50
090-5072-10X	Cami Dispenser	100	115/60	977	F1" - F1"	25	Aut.PA120	4C	Contin.	56,50

090-5072-Y60	Cami Dispenser	60	12	336	F1" - F1"	20	Aut.PA60	3C	40	49,50
090-5072-Z60	Cami Dispenser	60	24	432	F1" - F1"	20	Aut.PA60	3C	40	49,50

Ref.	Packaging (mm)	NR. of boxes	Ref.	Packaging (mm)	NR. of boxes
------	----------------	--------------	------	----------------	--------------

090-5072-060	505X355X425 - 365X305X945	2
090-5072-070	505X355X425 - 365X305X945	2
090-5072-100	505X355X425 - 365X305X945	2

090-5072-Y60	505X355X425 - 365X305X945	2
090-5072-Z60	505X355X425 - 365X305X945	2

090-5072-07X	505X355X425 - 365X305X945	2
090-5072-10X	505X355X425 - 365X305X945	2

Diesel transferring kit in solid structure for private use. It allows the quick and clean filling of the vehicles. It permits the following functions: the identification of the authorised users, the pre-selection of dispensed quantity, the detection of the total consumption and the single-user consumption, the storage of the deliveries and the management of 200 users. The system is equipped with key-manager to start the delivery quickly. The system includes the nozzle holder with microswitch to turn the pump on/off, automatic nozzle with swiveling joint and side hose holder. The equipment can be fixed to the wall, to a tank or to its own support column.



“Electronic Cami Dispenser” series composed by:

- Art. 091-5095-060 Electric pump 230V 50Hz 60 l/min
- Art. 091-5098-070 Electric pump 230V 50Hz 70 l/min
- Art. 091-5100-100 Electric pump 230V 50Hz 100 l/min



- Art. 091-5099-070 Electric pump 115V 60Hz 70 l/min
- Art. 091-5101-100 Electric pump 115V 60Hz 100 l/min



- Art. 908-0516-040 Connection hose \varnothing 20 mm M-M 1" 4 m length
- Art. 908-0616-040 Connection hose \varnothing 25 mm M-M 1" 4 m length



- Art. 093-5210-000 Automatic nozzle PA60 Flow rate 70 l/min
- Art. 093-5220-000 Automatic nozzle PA120 Flow rate 120 l/min



- Art. 092-5200-230 Electronic control unit MecGest 110/230V 50Hz
Software included



- Art. 092-5170-110 Mechanical flow meter with pulses MGI-110 - 5-110 l/min



- Art. 092-5220-000 Coded communication kit USB key reader for PC



- Art. 092-5300-000 Red Key - Manager - 1 piece

OPTIONAL:



- Art. 092-5300-010 Kit Blue Keys - Users - 10 pieces





- Art. 090-5072-000 Base column Cami-Dispenser



- Art. 094-5240-000 Water separating delivery filter for diesel 70 l/min
- Art. 094-5245-000 Water separating delivery filter for diesel 150 l/min


DIESEL TRANSFER SYSTEM "Electronic Cami Dispenser"



Ref.	Descrip.	Flow rate	Voltage	Power	Inlet-Outlet	Conn. hose	Nozzle	Flow meter	Duty cycle	Weight	Packaging
		l/min	AC V./Hz DC Volt	W	BSPG	Ø			min	Kg	mm

090-5074-060	Cami Dispenser	60	230/50	460	F1" - F1"	20	Aut.PA60	MG110	Contin.	29,00	505X355X425
090-5074-070	Cami Dispenser	70	230/50	552	F1" - F1"	20	Aut.PA60	MG110	Contin.	30,00	505X355X425
090-5074-100	Cami Dispenser	100	230/50	805	F1" - F1"	25	Aut.PA120	MG110	Contin.	36,50	505X355X425

090-5074-07X	Cami Dispenser	70	115/60	575	F1" - F1"	20	Aut.PA60	MG110	Contin.	30,00	505X355X425
090-5074-10X	Cami Dispenser	100	115/60	977	F1" - F1"	25	Aut.PA120	MG110	Contin.	36,50	505X355X425

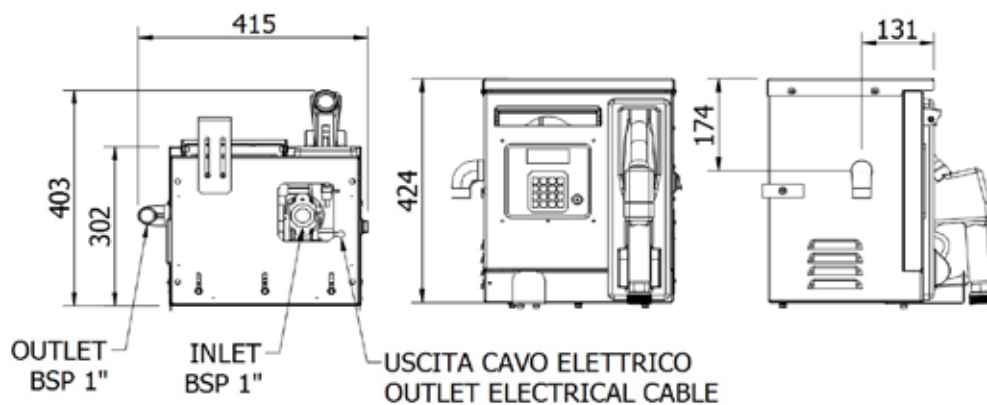

Diesel transferring kit in solid structure for private use. It allows the quick and clean filling of the vehicles. It permits the following functions: the identification of the authorised users, the pre-selection of dispensed quantity, the detection of the total consumption and the single-user consumption, the storage of the deliveries and the management of 200 users. The system is equipped with key-manager to start the delivery quickly. The system includes the nozzle holder with microswitch to turn the pump on/off, automatic nozzle with swiveling joint and side hose holder. The equipment can be fixed to the wall, to a tank or to its own column.

“Electronic Cami Dispenser” series composed by:



- Art. 091-5095-060** Electric pump 230V 50Hz 60 l/min
Art. 091-5098-070 Electric pump 230V 50Hz 70 l/min
Art. 091-5100-100 Electric pump 230V 50Hz 100 l/min



- Art. 091-5099-070** Electric pump 115V 60Hz 70 l/min
Art. 091-5101-100 Electric pump 115V 60Hz 100 l/min



- Art. 908-0516-040** Connection hose \varnothing 20 mm M-M 1" 4 m length
Art. 908-0616-040 Connection hose \varnothing 25 mm M-M 1" 4 m length



- Art. 093-5210-000** Automatic nozzle PA60 Flow rate 70 l/min
Art. 093-5220-000 Automatic nozzle PA120 Flow rate 120 l/min



- Art. 092-5200-230** Electronic control unit MecGest 110/230V 50Hz
 Software included



- Art. 092-5170-110** Mechanical pulsed flow meter MGI-110 - 5-110 l/min



- Art. 092-5220-000** Codified communication kit USB key reader for PC



- Art. 092-5300-000** Red Key- Manager - nr. 1 pc

OPTIONAL:






- Art. 092-5300-010** Kit blue keys - Users - nr. 10 pcs.



- Art. 094-5240-000** Water separating delivery filter for diesel 70 l/min
Art. 094-5245-000 Water separating delivery filter for diesel 150 l/min

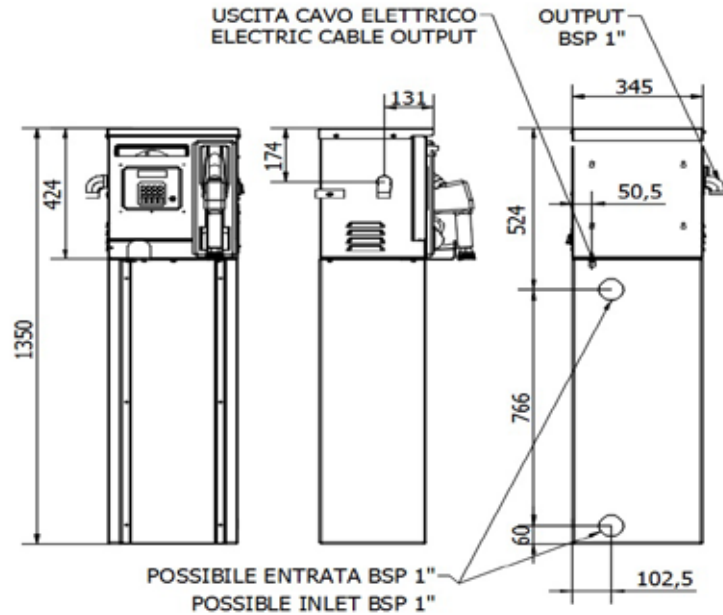DIESEL TRANSFER SYSTEM "Electronic Cami Dispenser"



Ref.	Descrip.	Voltage	Flow rate	Power	Inlet-outlet	Conn. hose	Nozzle	Flow meter	Duty cycle	Weight
		l/min	AC V./Hz DC Volt	W	BSPG	Ø			min	Kg

090-5075-060	Cami Dispenser	60	230/50	460	F1" - F1"	20	Aut.PA60	MGI110	Contin.	52,50
090-5075-070	Cami Dispenser	70	230/50	552	F1" - F1"	20	Aut.PA60	MGI110	Contin.	53,50
090-5075-100	Cami Dispenser	100	230/50	805	F1" - F1"	25	Aut.PA120	MGI110	Contin.	60,00

090-5075-07X	Cami Dispenser	70	115/60	575	F1" - F1"	20	Aut.PA60	MGI110	Contin.	53,50
090-5075-10X	Cami Dispenser	100	115/60	977	F1" - F1"	25	Aut.PA120	MGI110	Contin.	60,00

Ref.	Packaging (mm)	NR. of boxes
------	----------------	--------------

090-5075-060	505X355X425 - 365X305X945	2
090-5075-070	505X355X425 - 365X305X945	2
090-5075-100	505X355X425 - 365X305X945	2

090-5075-07X	505X355X425 - 365X305X945	2
090-5075-10X	505X355X425 - 365X305X945	2

Diesel transferring kit for private use. It allows the quick and safe filling of the vehicles. It also permits to measure and record the dispensed quantities. It permits the following functions: the preselection of the dispatched quantity, to see the total dispensed and each single dispense, to memorize the dispatches. The systems comes with a Lan Connection that enables the constant communication with the software, the reception of the type of configuration from remote and the report sending of the dispenses, MecGest can manage up to 200 users. The system is equipped with user-key and manager-key, to quickly start the dispatch. It is equipped with nozzle holder, microswitch to turn the pump on/off, automatic nozzle with swiveling joint, and extractable hose support. The equipment can be fixed to the wall, to a tank or to its own column.

“Electronic Cami Dispenser LC” series composed by:



Art. 091-5095-060 Electric pump 230V 50Hz 60 l/min

Art. 091-5098-070 Electric pump 230V 50Hz 70 l/min

Art. 091-5100-100 Electric pump 230V 50Hz 100 l/min



Art. 091-5099-070 Electric pump 115V 60Hz 70 l/min

Art. 091-5101-100 Electric pump 115V 60Hz 100 l/min



Art. 908-0516-040 Connection hose ø 20 mm M-M 1” 4 m lenght

Art. 908-0616-040 Connection hose ø 25 mm M-M 1” 4 m lenght



Art. 093-5210-000 Automatic nozzle PA60 Flow rate 70 l/min

Art. 093-5220-000 Automatic nozzle PA120 Flow rate 120 l/min



Art. 092-5200-230 Electronic control unit MecGest 110/230V 50Hz
Software included



Art. 092-5170-110 Mechanical pulsed flow meter MGI-110 - 5-110 l/min



Art. 092-5350-001 Coded Kit Lan Connection USB-RS485

OPTIONAL:



Art. 092-5300-010 Kit blue keys - Users - nr. 10 pcs



Art. 092-5220-000 Coded communication kit USB key reader for PC



Art. 090-5072-000 Base Column Cami-Dispenser





Art. 094-5240-000 Water separating delivery filter for diesel 70 l/min

Art. 094-5245-000 Water separating delivery filter for diesel 150 l/min


DIESEL TRANSFER SYSTEM "Electronic Cami Dispenser LC"



Ref.	Descrip.	Flow rate	Voltage	Power	Inlet-Outlet	Conn. hose	Nozzle	Flow meter	Duty cycle	Weight	Packaging
		l/min	AC V./Hz DC Volt	W	BSPG	Ø			min	Kg	mm

090-5076-060	Cami Dispenser	60	230/50	460	F1" - F1"	20	Aut.PA60	MGI110	Contin.	29,00	505X355X425
090-5076-070	Cami Dispenser	70	230/50	552	F1" - F1"	20	Aut.PA60	MGI110	Contin.	30,00	505X355X425
090-5076-100	Cami Dispenser	100	230/50	805	F1" - F1"	25	Aut.PA120	MGI110	Contin.	36,50	505X355X425

090-5076-07X	Cami Dispenser	70	115/60	575	F1" - F1"	20	Aut.PA60	MGI110	Contin.	30,00	505X355X425
090-5076-10X	Cami Dispenser	100	115/60	977	F1" - F1"	25	Aut.PA120	MGI110	Contin.	36,50	505X355X425

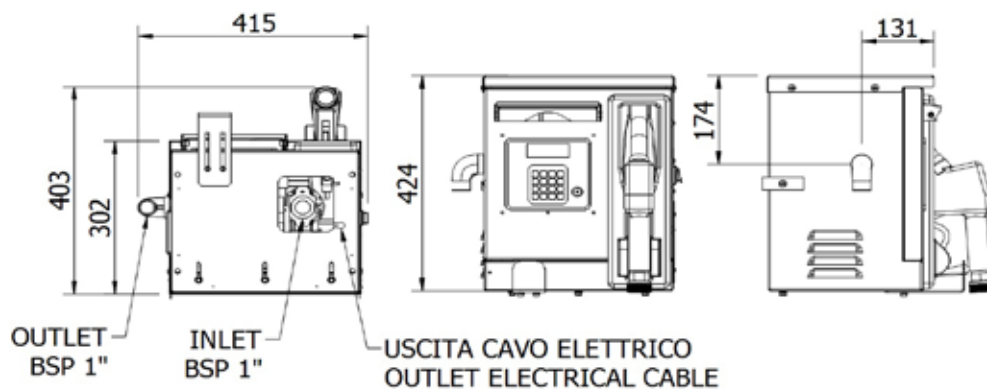

Diesel transferring kit for private use. It allows the quick and safe filling of the vehicles. It allows the quick and safe filling of the vehicles. It permits the following functions: the preselection of the dispatched quantity, to see the total dispensed and each single dispense, to memorize the dispatches. The systems comes with a Lan Connection that enables the constant communication with the software, the reception of the type of configuration from remote and the report sending of the dispenses, MecGest can manage up to 200 users. It is equipped with nozzle holder, microswitch to turn the pump on/off, automatic nozzle with swiveling joint, and extractable hose support. The equipment can be fixed to the ground.

“Electronic Cami Dispenser LC” series composed by:



Art. 091-5095-060 Electric pump 230V 50Hz 60 l/min

Art. 091-5098-070 Electric pump 230V 50Hz 70 l/min

Art. 091-5100-100 Electric pump 230V 50Hz 100 l/min



Art. 091-5099-070 Electric pump 115V 60Hz 70 l/min

Art. 091-5101-100 Electric pump 115V 60Hz 100 l/min



Art. 908-0516-040 Connection hose \varnothing 20 mm M-M 1” 4 m lenght

Art. 908-0616-040 Connection hose \varnothing 25 mm M-M 1” 4 m lenght



Art. 093-5210-000 Automatic nozzle PA60 Flow rate 70 l/min

Art. 093-5220-000 Automatic nozzle PA120 Flow rate 120 l/min



Art. 092-5200-230 Electronic control unit MecGest 110/230V 50Hz
Software included



Art. 092-5170-110 Mechanical pulsed flow meter MGI-110 - 5-110 l/min



Art. 092-5350-001 Coded Kit Lan Connection USB-RS485

OPTIONAL:



Art. 092-5300-010 Kit blue keys - Users - nr. 10 pcs




Art. 092-5220-000 Coded communication kit USB key reader for PC





Art. 094-5240-000 Water separating delivery filter for diesel 70 l/min

Art. 094-5245-000 Water separating delivery filter for diesel 150 l/min

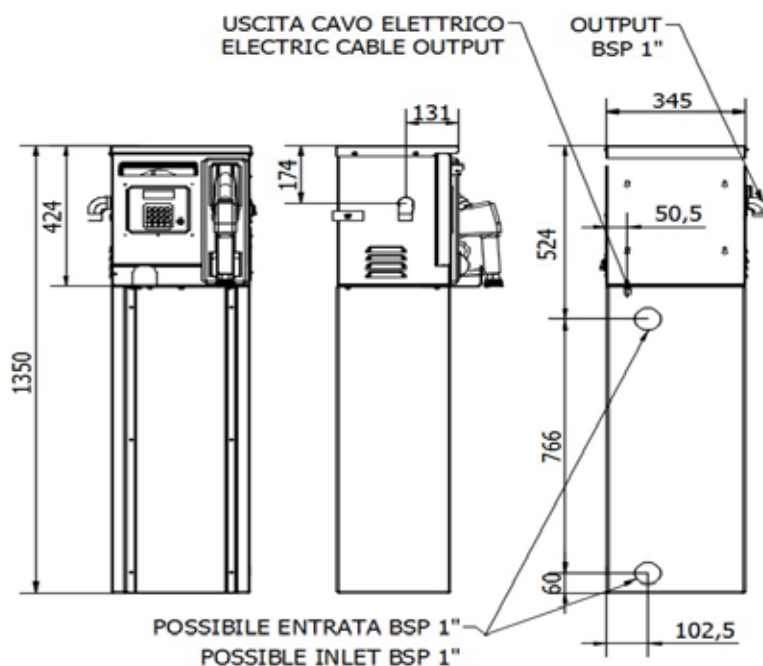DIESEL TRANSFER SYSTEM "Electronic Cami Dispenser LC"



Ref.	Descrip.	Flow rate	Voltage	Power	Inlet-outlet	Conn. hose	Nozzle	Flow meter	Duty cycle	Weight
		l/min	AC V./Hz DC Volt	W	BSPG	Ø			min	Kg

090-5077-060	Cami Dispenser	60	230/50	460	F1" - F1"	20	Aut.PA60	MG1110	Contin.	52,50
090-5077-070	Cami Dispenser	70	230/50	552	F1" - F1"	20	Aut.PA60	MG1110	Contin.	53,50
090-5077-100	Cami Dispenser	100	230/50	805	F1" - F1"	25	Aut.PA120	MG1110	Contin.	60,00

090-5077-07X	Cami Dispenser	70	115/60	575	F1" - F1"	20	Aut.PA60	MG1110	Contin.	53,50
090-5077-10X	Cami Dispenser	100	115/60	977	F1" - F1"	25	Aut.PA120	MG1110	Contin.	60,00

Ref.	Packaging (mm)	NR. of boxes
------	----------------	--------------

090-5077-060	505X355X425 - 365X305X945	2
090-5077-070	505X355X425 - 365X305X945	2
090-5077-100	505X355X425 - 365X305X945	2

090-5077-07X	505X355X425 - 365X305X945	2
090-5077-10X	505X355X425 - 365X305X945	2

Diesel transferring kit in solid structure for private use. It allows the quick and clean filling of the vehicles. It is equipped with automatic nozzle with swiveling joint, water filter absorption able to dispense the product free from impurities, microswitch to turn the pump on/off and side hose holder. Removable frontal panel for easy maintenance. The equipment can be fixed to the ground.

“Gaia Service” series composed by:



Art. 091-5098-070 Electric pump 230V 50Hz 70 l/min

Art. 091-5100-100 Electric pump 230V 50Hz 100 l/min



Art. 091-5099-070 Electric pump 115V 60Hz 70 l/min

Art. 091-5101-100 Electric pump 115V 60Hz 100 l/min



Art. 908-0516-040 Connection hose \varnothing 20 mm M-M 1" 4 m length

Art. 908-0616-040 Connection hose \varnothing 25 mm M-M 1" 4 m length



Art. 093-5210-000 Automatic nozzle PA60 Flow rate 70 l/min

Art. 093-5220-000 Automatic nozzle PA120 Flow rate 120 l/min




Art. 092-5104-000 Mechanical flow meter 4 digits F1" 120 l/min



Art. 094-5240-000 Water separating delivery filter for diesel 70 l/min

Art. 094-5245-000 Water separating delivery filter for diesel 150 l/min

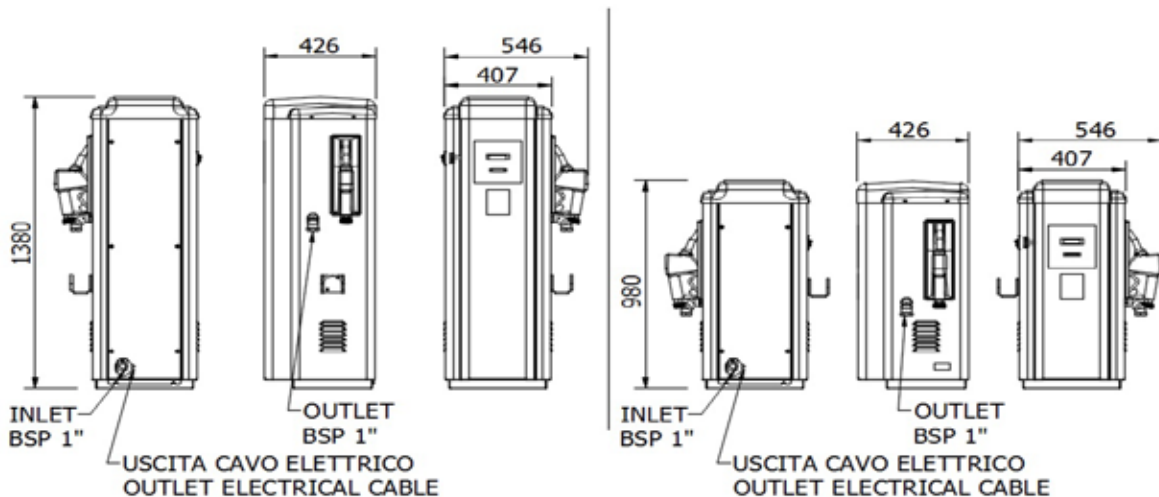

H. 1380 mm

H.980 mm - Tank

DIESEL TRANSFER SYSTEM "Gaia Service"



H. 1380 mm



H.980 mm - Tank

Ref.	Descrip.	Flow rate	Voltage	Power	Inlet-outlet	Conn. hose	Nozzle	Flow meter/Filter	Duty cycle	Weight
		l/min	AC V./Hz DC Volt	W	BSPG	Ø			min	Kg

H. 1380 mm

090-5080-070	Gaia Service	70	230/50	552	F1" - F1"	20	Aut.PA60	YES 4C	Contin.	69,00
090-5080-100	Gaia Service	100	230/50	805	F1" - F1"	25	Aut.PA120	YES 4C	Contin.	76,00
090-5080-07X	Gaia Service	70	115/60	575	F1" - F1"	20	Aut.PA60	YES 4C	Contin.	69,00
090-5080-10X	Gaia Service	100	115/60	977	F1" - F1"	25	Aut.PA120	YES 4C	Contin.	76,00

H. 980 mm Suitable for fastening to tank

090-5081-070	Gaia "Tank"	70	230/50	552	F1" - F1"	20	Aut.PA60	YES 4C	Contin.	61,00
090-5081-100	Gaia "Tank"	100	230/50	805	F1" - F1"	25	Aut.PA120	YES 4C	Contin.	68,00
090-5081-07X	Gaia "Tank"	70	115/60	575	F1" - F1"	20	Aut.PA60	YES 4C	Contin.	61,00
090-5081-10X	Gaia "Tank"	100	115/60	977	F1" - F1"	25	Aut.PA120	YES 4C	Contin.	68,00

Ref.	Packaging (mm)	NR. of boxes
------	----------------	--------------

090-5080-070	530X490X1410	1
090-5080-100	530X490X1410	1

090-5080-07X	530X490X1410	1
090-5080-10X	530X490X1410	1

Ref.	Packaging (mm)	NR. of boxes
------	----------------	--------------

090-5081-070	530X490X1010	1
090-5081-100	530X490X1010	1

090-5081-07X	530X490X1010	1
090-5081-10X	530X490X1010	1

Diesel transferring kit in solid structure for private use. It allows the quick and clean filling of the vehicles. It permits the following functions: the identification of the authorised users, the pre-selection of dispensed quantity, the detection of the total consumption and the single-user consumption, the storage of the deliveries and the management of 200 users. The system is equipped with key-manager to start the delivery quickly. The system includes the nozzle holder with microswitch to turn the pump on/off, automatic nozzle with swiveling joint and side hose holder.

“Electronic Gaia Service” series composed by:



- Art. 091-5098-070 Electric pump 230V 50Hz 70 l/min
- Art. 091-5100-100 Electric pump 230V 50Hz 100 l/min



- Art. 091-5099-070 Electric pump 115V 60Hz 70 l/min
- Art. 091-5101-100 Electric pump 115V 60Hz 100 l/min



- Art. 908-0516-040 Connection hose \varnothing 20 mm M-M 1" 4 m lenght
- Art. 908-0616-040 Connection hose \varnothing 25 mm M-M 1" 4 m lenght



- Art. 093-5210-000 Automatic nozzle PA60 Flow rate 70 l/min
- Art. 093-5220-000 Automatic nozzle PA120 Flow rate 120 l/min



- Art. 092-5200-230 Electronic control unit MecGest 110/230V 50Hz
Software included



- Art. 092-5170-110 Mechanical pulsed flow meter MGI-110 - 5-110 l/min



- Art. 094-5240-000 Water separating delivery filter for diesel 70 l/min
- Art. 094-5245-000 Water separating delivery filter for diesel 150 l/min



- Art. 092-5220-000 Coded communication kit USB key reader for PC




- Art. 092-5300-000 Red Key- Manager - nr. 1 pc.

OPTIONAL:




- Art. 092-5300-010 Kit blue keys - Users - nr. 10 pcs

H. 1380 mm

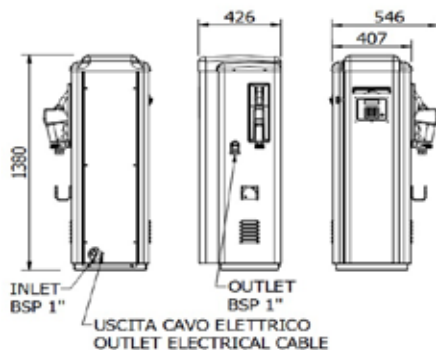

H.980 mm - Tank

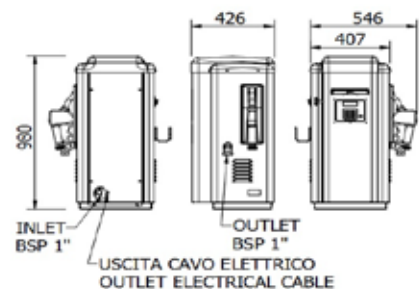



DIESEL TRANSFER SYSTEM "Electronic Gaia Service"



H. 1380 mm



H.980 mm - Tank

Ref.	Descrip.	Flow rate	Voltage	Power	Inlet-outlet	Conn. hose	Nozzle	Flow meter/Filter	Duty cycle	Weight
		l/min	AC V./Hz DC Volt	W	BSPG	Ø			min	Kg

H. 1380 mm

090-5084-070	Gaia Service	70	230/50	552	F1" - F1"	20	Aut.PA60	YES	Contin.	69,00
090-5084-100	Gaia Service	100	230/50	805	F1" - F1"	25	Aut.PA120	YES	Contin.	76,00

090-5084-07X	Gaia Service	70	115/60	575	F1" - F1"	20	Aut.PA60	YES	Contin.	69,00
090-5084-10X	Gaia Service	100	115/60	977	F1" - F1"	25	Aut.PA120	YES	Contin.	76,00

H. 980 mm Suitable for fastening to tank

090-5085-070	Gaia "Tank"	70	230/50	552	F1" - F1"	20	Aut.PA60	YES	Contin.	61,00
090-5085-100	Gaia "Tank"	100	230/50	805	F1" - F1"	25	Aut.PA120	YES	Contin.	68,00

090-5085-07X	Gaia "Tank"	70	115/60	575	F1" - F1"	20	Aut.PA60	YES	Contin.	61,00
090-5085-10X	Gaia "Tank"	100	115/60	977	F1" - F1"	25	Aut.PA120	YES	Contin.	68,00

Ref.	Packaging (mm)	NR. of boxes
------	----------------	--------------

090-5084-070	530X490X1410	1
090-5084-100	530X490X1410	1

090-5084-07X	530X490X1410	1
090-5084-10X	530X490X1410	1

Ref.	Packaging (mm)	NR. of boxes
------	----------------	--------------

090-5085-070	530X490X1010	1
090-5085-100	530X490X1010	1

090-5085-07X	530X490X1010	1
090-5085-10X	530X490X1010	1

Diesel transferring kit in solid structure for private use. It allows the quick and clean filling of the vehicles. It also permits to measure and record the dispensed quantities. It permits the following functions: the pre-selection of the dispatched quantity, to see the total dispensed and each single dispense, to memorize the dispatches. The systems comes with a Lan Connection that enables the constant communication with the software, the reception of the type of configuration from remote and the report sending of the dispenses, MecGest can manage up to 200 users. The system includes the nozzle holder with microswitch to turn the pump on/off, automatic nozzle with swiveling joint and hose holder.

“Electronic Gaia Service LC” series composed by:



- Art. 091-5098-070 Electric pump 230V 50Hz 70 l/min
- Art. 091-5100-100 Electric pump 230V 50Hz 100 l/min



- Art. 091-5099-070 Electric pump 115V 60Hz 70 l/min
- Art. 091-5101-100 Electric pump 115V 60Hz 100 l/min



- Art. 908-0516-040 Connection hose \varnothing 20 mm M-M 1” 4 m lenght
- Art. 908-0616-040 Connection hose \varnothing 25 mm M-M 1” 4 m lenght



- Art. 093-5210-000 Automatic nozzle PA60 Flow rate 70 l/min
- Art. 093-5220-000 Automatic nozzle PA120 Flow rate 120 l/min



- Art. 092-5200-230 Electronic control unit MecGest 110/230V 50Hz
Software included



- Art. 092-5170-110 Mechanical pulsed flow meter MGI-110 - 5-110 l/min



- Art. 094-5240-000 Water separating delivery filter for diesel 70 l/min
- Art. 094-5245-000 Water separating delivery filter for diesel 150 l/min



- Art. 092-5350-001 Coded Kit Lan Connection USB-RS485

OPTIONAL:




- Art. 092-5300-010 Kit blue keys - Users - nr. 10 pcs



- Art. 092-5220-000 Coded communication kit USB key reader for PC

H. 1380 mm

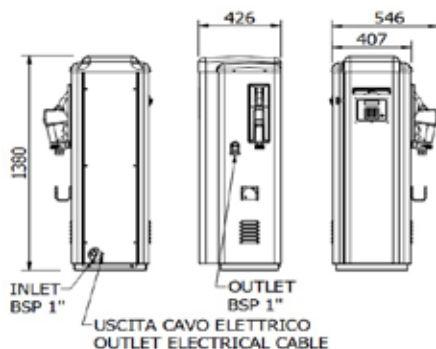

H.980 mm - Tank





DIESEL TRANSFER SYSTEM "Electronic Gaia Service LC"



H. 1380 mm



H.980 mm - Tank

Ref.	Descrip.	Flow rate	Voltage	Power	Inlet-outlet	Conn. hose	Nozzle	Flow meter/Filter	Duty cycle	Weight
		l/min	AC V./Hz DC Volt	W	BSPG	Ø			min	Kg

H. 1380 mm

090-5086-070	Gaia Service	70	230/50	552	F1" - F1"	20	Aut.PA60	YES	Contin.	69,00
090-5086-100	Gaia Service	100	230/50	805	F1" - F1"	25	Aut.PA120	YES	Contin.	76,00

090-5086-07X	Gaia Service	70	115/60	575	F1" - F1"	20	Aut.PA60	YES	Contin.	69,00
090-5086-10X	Gaia Service	100	115/60	977	F1" - F1"	25	Aut.PA120	YES	Contin.	76,00

H. 980 mm Suitable for fastening to tank

090-5087-070	Gaia "Tank"	70	230/50	552	F1" - F1"	20	Aut.PA60	YES	Contin.	61,00
090-5087-100	Gaia "Tank"	100	230/50	805	F1" - F1"	25	Aut.PA120	YES	Contin.	68,00

090-5087-07X	Gaia "Tank"	70	115/60	575	F1" - F1"	20	Aut.PA60	YES	Contin.	61,00
090-5087-10X	Gaia "Tank"	100	115/60	977	F1" - F1"	25	Aut.PA120	YES	Contin.	68,00

Ref.	Packaging (mm)	NR. of boxes
------	----------------	--------------

090-5086-070	530X490X1410	1
090-5086-100	530X490X1410	1

090-5086-07X	530X490X1410	1
090-5086-10X	530X490X1410	1

Ref.	Packaging (mm)	NR. of boxes
------	----------------	--------------

090-5087-070	530X490X1010	1
090-5087-100	530X490X1010	1

090-5087-07X	530X490X1010	1
090-5087-10X	530X490X1010	1

Electronic control unit to manage the diesel transfer for private usage. It allows the measurement and record of the dispatched quantities and the following functions: identification of authorized vehicles, preselection of quantity to dispatch, it detects the total dispense and the single ones, it allows the memorization of the dispenses and it can handle 200 users. The system comes with a manager-key or Lan connection. The system can be completed with electric pump, nozzle holder with microswitch for switching on and off the pump, mechanical pulsed flow meter. The equipment is designed to be fixed to the wall or to tanks.

“MecGest Box” series composed by:



Art. 092-5200-230 Electronic control unit MecGest 110/230V 50Hz complete with software



Art. 092-5220-000 Communication kit USB keys reader for codified PC



Art. 092-5300-000 Red Key- Manager - 1 piece



Art. 092-5350-000 Codified Kit Lan Connection USB - RS485



OPTIONAL:

Art. 092-5300-010 Kit blue keys - Users - 10 pcs



Art. 091-5095-060 Electric pump 230V 50Hz 60 l / min

Art. 091-5098-070 Electric pump 230V 50Hz 70 l / min

Art. 091-5100-100 Electric pump 230V 50Hz 100 l / min



Art. 091-5099-070 Electric pump 115V 60Hz 70 l / min

Art. 091-5101-100 Electric pump 115V 60Hz 100 l / min



Art. 092-5170-110 Mechanical pulsed flow meter MGI-110 - 5-110 l/min



Art. F90-9910-000 Aluminium nozzle holder with micro




Art. 092-5402-100 Signal cable 2 poles I. 100 m shielded

ELECTRONIC CONTROL UNIT "MecGesrt Box"



Ref.	Description	Voltage	Communication kit USB keys reader for codified PC	Lan Connection kit USB - R	Weight	Packaging
		AC V./Hz DC Volt			kg	mm
092-5510-000	MecGesrt Box	230/50 - 115/60	YES	NO	6,50	285X285X230
092-5520-000	MecGesrt Box LC	230/50 - 115/60	NO	YES	6,50	285X285X230

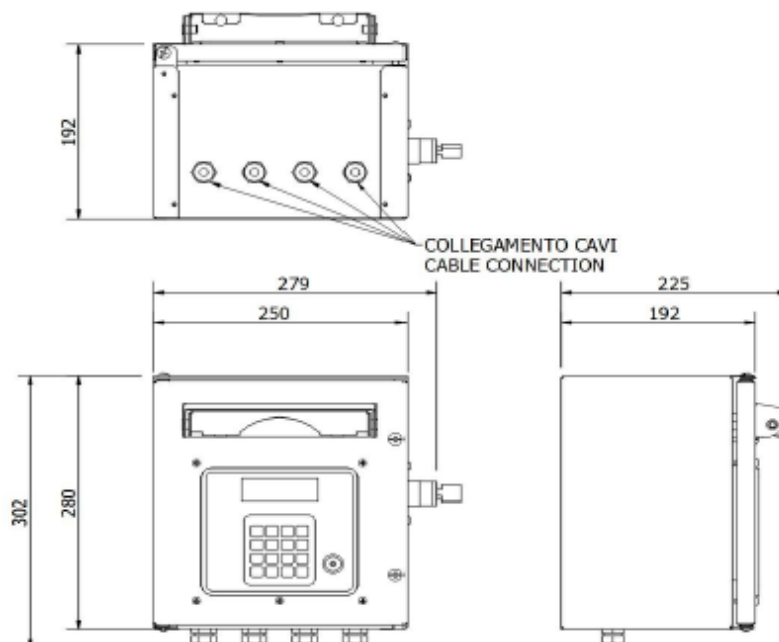

Electronic control unit that allows the refuelling of groups of vehicles. It offers the possibility to register the diesel supplies information and categorize them by user, vehicle, date and time. The equipment has to be used for private usage.

MecGest CONFIGURATION OPTIONS:



Art. 092-5200-230

OPTION 1



Art. 092-5220-000 + 092-5300-000

OPTION 3 = OPTION 2 + OPTIONAL



Art. 092-5350-001 + 092-5220-000 + 092-5300-010



Art. 092-5300-010

OPTION 2



Art. 092-5350-001

OPTIONAL:




Art. 092-5300-010 + 092-5220-000

OPTION 1/ COMMUNICATION KIT WITH MEMORY-KEY: Red key and its reader: through this option it is possible to download the data of the diesel supplies and activate new user-codes. This procedure is done through the use of the red key and its own reader that have to be used with the PC and our software MecGest. The identification of the users and of the vehicles to enable the diesel supplies is made through the PIN code.



OPTION 2/ CABLE COMMUNICATION KIT: LAN connection cable for the direct connection with the PC and MecGest software. Also in this case it is possible to download the data of the diesel supplies and activate new user-codes with direct cable connection. The identification of the users and of the vehicles to enable the diesel supplies is made through the PIN code.

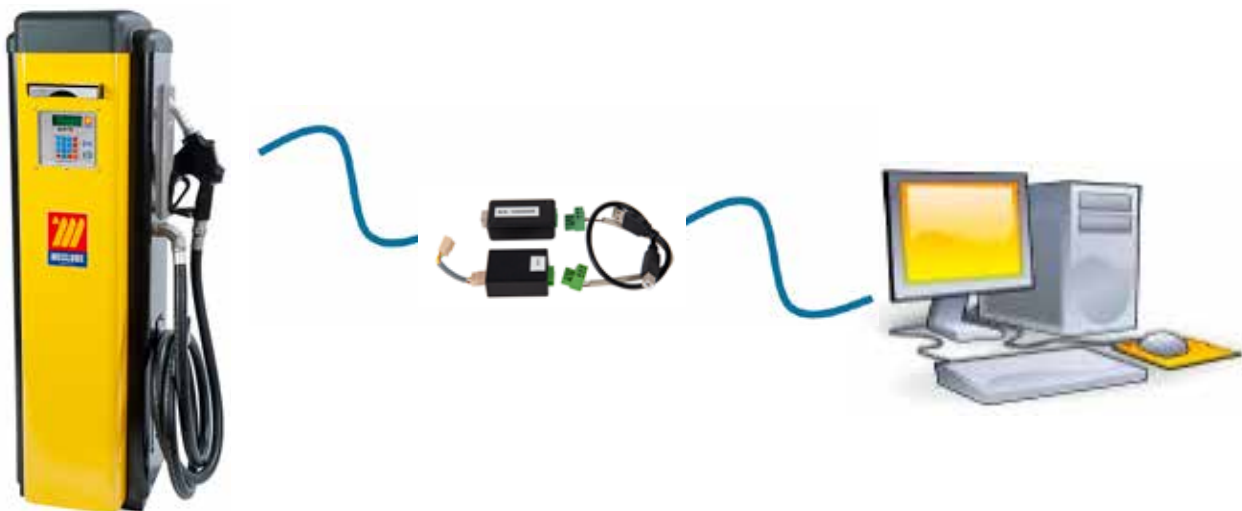

OPTION 3/ CABLE COMMUNICATION KIT + KEY READER + PACK 10 IDENTIFICATION KEYS: Converter and LAN connection cable for the direct connection to the PC and to MecGest software, and key reader with identification keys. Additionally, compared to previous options, it is possible to configurate the blue keys for users/vehicles in order to enable the diesel supplies. The diesel supply through PIN code is still available and the download of supply data or the activation of new keys or PIN are possible through LAN cable.

MINIMUM SYSTEM REQUISITES FOR MEC-GEST SOFTWARE: Operating system Microsoft Windows XP, 7, 8, 10 or superior, free USB port.

Rigid polyethylene tank for diesel transport for private use in total exemption for ADR (see ADR Regulation at page 180), with built-in transfer unit consisting of rotary vane self-priming pump available in various voltages (12-24V), delivery hose \varnothing 20 mm, 4 m length, automatic nozzle with swiveling joint. The system is available at 220 liters capacity, can be integrated with flow meter for measuring diesel. Equipped with pressurizing/depressurizing relief valve and lockable lid.

“Diesel Tank” series composed by:



Art. 090-6220-000 Only 220 l Tank



Art. 091-5081-045 Pump 12V - power cable (sec. 4 mmq, 4 m length) with pincers and fuse - 45 l/min

Art. 091-5083-045 24V Pump - power cable (sec. 4 mmq, 4 m length) with pincers and fuse - 45 l/min



Art. 908-0516-040 Connection hose \varnothing 20 mm M-M 1" 4 m length





Art. 093-5210-000 Automatic nozzle PA60 Flow rate 70 l/min



Art. 092-5124-000 Digital turbine flow meter MEC 24 min/max flow rate 7/120 l/min



DIESEL TANK 220



Ref.	Descrip.	Flow rate l/min	Voltage AC V./Hz DC Volt	Power W	Inlet-outlet BSPG	Conn. hose Ø	Nozzle 	Flow meter 	Duty cycle min	Weight Kg	Packaging mm
------	----------	--------------------	--------------------------------	------------	----------------------	-----------------	--	---	-------------------	--------------	-----------------

090-6220-012	Tank 220 I	45	12	264	F1" - F1"	20	Aut.PA60	NO	40	25,00	600X910X665
090-6220-024	Tank 220 I	45	24	312	F1" - F1"	20	Aut.PA60	NO	40	25,00	600X910X665

090-6221-012	Tank 220 I	45	12	264	F1" - F1"	20	Aut.PA60	YES	40	25,30	600X910X665
090-6221-024	Tank 220 I	45	24	312	F1" - F1"	20	Aut.PA60	YES	40	25,30	600X910X665

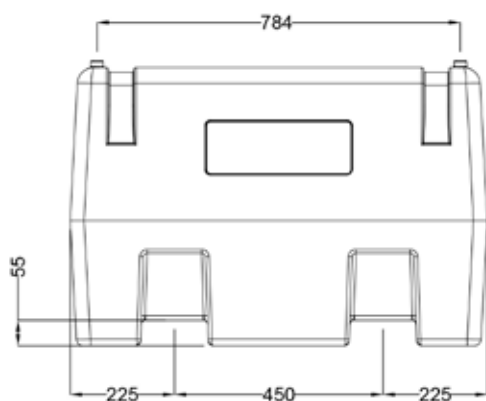

Rigid polyethylene tank for diesel transport for personal use in total exemption for ADR (see ADR Regulation at page 180), with built-in transfer unit consisting of rotary vane self-priming pump available in various voltages (12-24V), delivery hose \varnothing 20 mm, 4 m length, automatic nozzle with swiveling joint. The system is available at 330 liters capacity, can be integrated with flow meter for measuring diesel and level probe. Equipped with pressurizing/depressurizing relief valve and lockable lid.

“Diesel Tank” series composed by:



Art. 090-6330-000 Only 330 I Tank



Art. 091-5081-045 12V Pump - power cable (sec. 4 mmq, 4 m length) with pincers and fuse - 45 l/min

Art. 091-5083-045 24V Pump - power cable (sec. 4 mmq, 4 m length) with pincers and fuse - 45 l/min



Art. 908-0516-040 Connection hose \varnothing 20 mm M-M 1" 4 m length



Art. 093-5210-000 Automatic nozzle PA60 Flow rate 70 l/min





Art. 092-5124-000 Digital turbine flow meter MEC 24 min/max flow rate 7/120 l/min



Art. 092-6000-220 Probe for tank 330 I - 440 I



DIESEL TANK 330



Ref.	Descrip.	Flow rate	Voltage	Power	Inlet-outlet	Conn. hose	Nozzle	Flow meter	Duty cycle	Weight	Packaging
		l/min	AC V./Hz DC Volt	W	BSPG	Ø			min	Kg	mm

090-6330-012	Tank 330 I	45	12	264	F1" - F1"	20	Aut.PA60	NO	40	44,00	1200x800x650
090-6330-024	Tank 330 I	45	24	312	F1" - F1"	20	Aut.PA60	NO	40	44,00	1200x800x650

090-6331-012	Tank 330 I	45	12	264	F1" - F1"	20	Aut.PA60	YES	40	44,30	1200x800x650
090-6331-024	Tank 330 I	45	24	312	F1" - F1"	20	Aut.PA60	YES	40	44,30	1200x800x650

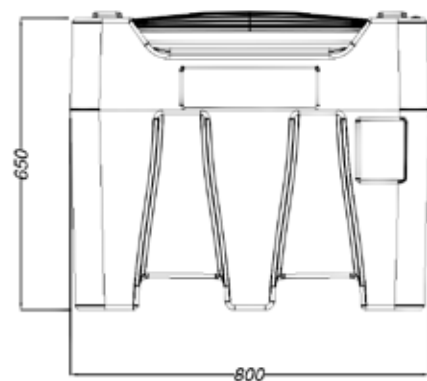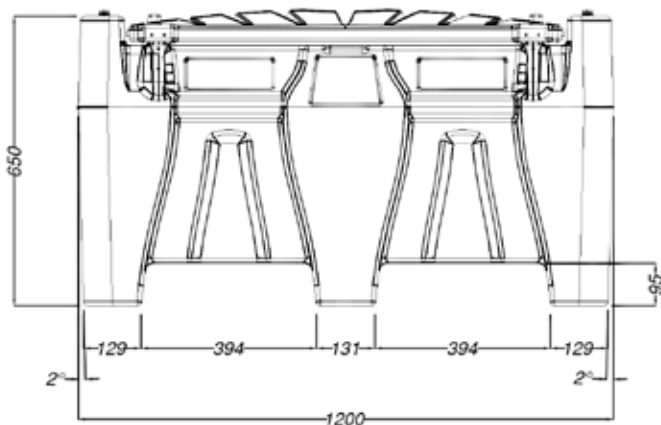

Rigid polyethylene tank for diesel transport for private use in total exemption for ADR (see ADR Regulation at page 180), with built-in transfer unit consisting of rotary vane self-priming pump available in various voltages (12-24V), delivery hose \varnothing 20 mm, 4 m length, automatic nozzle with swiveling joint. The system is available at 440 liters capacity, can be integrated with flow meter for measuring diesel and level probe. Equipped with pressurizing/depressurizing relief valve and lockable lid.

“Diesel Tank” series composed by:



Art. 090-6440-000 Only 440 I Tank



Art. 091-5081-045 12V Pump - power cable (sec. 4 mmq, 4 m length) with pincers and fuse - 45 l/min

Art. 091-5083-045 24V Pump - power cable (sec. 4 mmq, 4 m length) with pincers and fuse - 45 l/min



Art. 908-0516-040 Connection hose \varnothing 20 mm M-M 1" 4 m length



Art. 093-5210-000 Automatic nozzle PA60 Flow rate 70 l/min





Art. 092-5124-000 Digital turbine flow meter MEC 24 min/max flow rate 7/120 l/min



Art. 092-6000-220 Probe for tank 330 I - 440 I



DIESEL TANK 440



Ref.	Descrip.	Flow rate	Voltage	Power	Inlet-outlet	Conn. hose	Nozzle	Flow meter	Duty cycle	Weight	Packaging
		l/min	AC V./Hz DC Volt	W	BSPG	Ø			min	Kg	mm

090-6440-012	Tank 440 I	45	12	264	F1" - F1"	20	Aut.PA60	NO	40	53,00	1200x800x785
090-6440-024	Tank 440 I	45	24	312	F1" - F1"	20	Aut.PA60	NO	40	53,00	1200x800x785

090-6441-012	Tank 440 I	45	12	264	F1" - F1"	20	Aut.PA60	YES	40	53,30	1200x800x785
090-6441-024	Tank 440 I	45	24	312	F1" - F1"	20	Aut.PA60	YES	40	53,30	1200x800x785

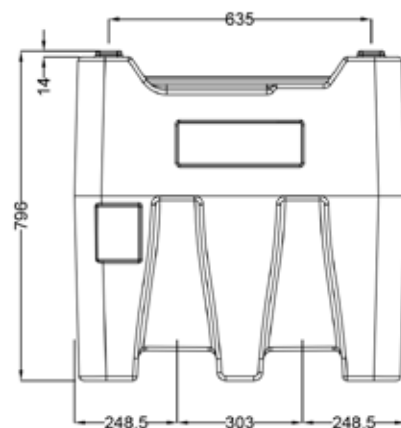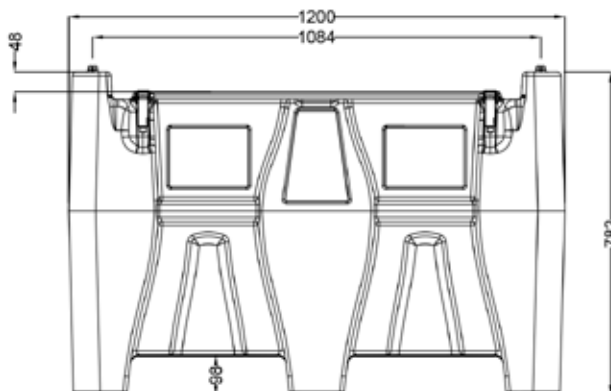

Combined tank for Diesel and AdBlue® transport for private use in total exemption for ADR (see ADR Regulation at page 180). Made of polyethylene with reinforced lockable lid. Diesel compartment with aluminium filling plug and integrated safety valve, AdBlue® compartment polyethylene plug. Complete with tank level indicator and suction filter only for diesel compartment. The tank is provided with chamfers to be lifted when it is full and grips to be lifted when empty. It is equipped with slots for positioning the fastening belts at the support base. Diesel and AdBlue® compartments supplied with 4 m long cable with pincers for the connection to power battery supply.

“Diesel-AdBlue® Tank” series composed by:



Art. 090-6450-000 Only 400 l Tank + 50 l without pump



Art. 091-5081-045 12V Pump - power cable (sec. 4 mmq, 4 m length) with pincers and fuse - 45 l/min



Art. 098-6000-012 AdBlue® submerged pump 12V-15 l/min power cable (sec.2,5 mmq. 4 m length) with pincers and fuse



Art. 092-5124-000 Digital turbine flow meter MEC 24 min/max flow rate 7/120 l/min



Art. 908-0516-040 Connection hose \varnothing 20 mm M-M 1" 4 m length for diesel



Art. 909-0500-040 Delivery hose EPDM \varnothing 19x29 mm M-M 4 m length for AdBlue®



Art. 099-5199-000 Manual plastic nozzle “AD90” Flow rate 90 l/min



Art. 093-5210-000 Automatic nozzle PA60 Flow rate 70 l/min



Art. 092-6000-220 Probe for tank 330 l - 440 l



DIESEL-AdBlue® TANK 400+50



Ref.	Descrip.	Liquid	Flow rate	Voltage	Power	Inlet-outlet	Conn. hose	Nozzle	Flow meter	Duty cycle	Weight	Packaging
			l/min	AC V./Hz DC Volt	W	BSPG	Ø			min	kg	mm

090-6450-012	400 l	Diesel	45	12	264	F1"-F1"	20	Aut.PA60	NO	40	57,00	1200X800X796
	Tank 400 + 50											
	50 l	AdBlue®	15	12	26		19	Man.AD90	NO	-		

090-6451-012	400 l	Diesel	45	12	264	F1"-F1"	20	Aut.PA60	YES	40	57,30	1200X800X796
	Tank 400 + 50											
	50 l	AdBlue®	15	12	26		19	Man.AD90	NO	-		

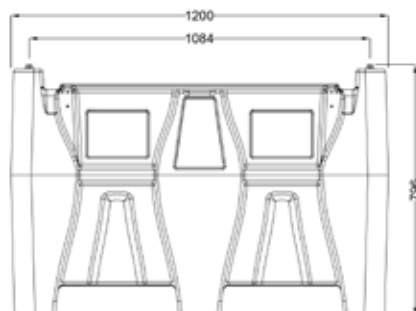

DIESEL-AdBlue® TANK

AdBlue® “Diesel-AdBlue® Tank 900+100”

Combined tank for Diesel and AdBlue® transport for private use in partial exemption paragraph 1.1.3.6 ADR (see ADR Regulation at page 180). Made of polyethylene with reinforced lockable lid. Diesel compartment with 2” aluminium filling plug and integrated 3 effects safety valve, internal breakwater bulkheads are integrated to grant the maximum security during the transport. AdBlue® compartment with 2” polyethylene plug. Complete with tank level indicator and suction filter only for Diesel compartment. The tank is provided with chamfers to be lifted when it is full and grips to be lifted when empty. It is equipped with slots for positioning the fastening belts at the support base. Diesel and AdBlue® compartments are supplied with 4 m long cable with pincers for the connection to the power battery supply.

“Diesel-AdBlue® Tank” series composed by:



Art. 090-6900-000 Only 900 l Tank + 100 l without pump



Art. 091-5081-060 12V Pump - power cable (sec. 4 mmq, 4 m length) with pincers and fuse - 60 l/min



Art. 098-6000-012 AdBlue® submerged pump 12V-15 l/min power cable (sec.2,5 mmq. 4 m length) with pincers and fuse



Art. 092-5124-000 Digital turbine flow meter MEC 24 min/max flow rate 7/120 l/min



Art. 908-0516-060 Connection hose ø 20 mm M-M 1” 6 m length for diesel



Art. 909-0500-060 Delivery hose EPDM ø 19x29 mm M-M 6 m length for AdBlue®



Art. 099-5199-000 Manual plastic nozzle “AD90” Flow rate 90 l/min





Art. 093-5210-000 Automatic nozzle PA60 Flow rate 70 l/min

DIESEL-AdBlue® TANK



AdBlue® “Diesel-AdBlue® Tank 900+100”



Ref.	Descrip.	Liquid	Flow rate	Voltage	Power	Inlet-outlet	Conn. hose	Nozzle	Flow meter	Duty cycle	Weight	Packaging
			l/min	AC V./Hz DC Volt	W	BSPG	Ø			min	kg	mm

090-6900-012	900 l	Diesel	60	12	336	F1"-F1"	20	Aut.PA60	NO	40	113,60	1530X910X1150
	Tank 900 + 100											
	100 l	AdBlue®	15	12	26		19	Man.AD90	NO	-		

090-6901-012	900 l	Diesel	60	12	336	F1"-F1"	20	Aut.PA60	YES	40	114,00	1530X910X1150
	Tank 900 + 100											
	100 l	AdBlue®	15	12	26		19	Man.AD90	NO	-		

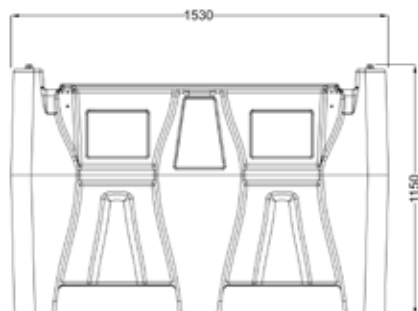

Rigid polyethylene tank for diesel transport for private and professional use in total exemption for ADR (see ADR Regulation at page 180), perfect for refuelling of small operative vehicles, light-duty or recreational vehicles. It is equipped with run-flat wheels and suitable for moving on any ground. They have compact dimension for easy moving. Every tank can be filled vertically or horizontally, with the same fuel quantity. Provided with nozzle holder bracket, sphere relief valve with swiveling joint, filling plug with anti-spill vent valve.

“Caddy” series composed by:



Art. 090-6055-M00 Wheeled Caddy Tank 55 l diesel

Art. 090-6110-M00 Wheeled Caddy Tank 110 l diesel



Art. 027-3720-000 Alluminium manual rotary pump



Art. 908-0500-040 Antistatic rubber hose Ø 20 mm 4 m lenght



Art. 093-5200-000 Manual nozzle “MC 80” Flow rate 80 l/min


TANK FOR DIESEL TRANSPORT “Caddy”



55 l



110 l

Ref.	Descrip.	Flow rate for 100 revolutions		Width mm	Depth mm	Height mm	Nozzle 	Weight kg	Packaging mm
		l	USG						

090-6055-M00	Caddy 55 l	38	10	460	360	900	Manual	8,00	1000X500X500
090-6110-M00	Caddy 110 l	38	10	460	440	1100	Manual	12,00	1200X500X500

DOUBLE-WALL TANK FOR DIESEL “Multitank”

Double-wall tanks in HDPE with integrated galvanised steel foil, palletised base. Equipped with level indicator, visual leaks detector, built-in transport handles. Tanks suitable for stocking of diesel, bio-diesel, for professional or private use. Approved for indoor installing and proper for filling with nozzles.




Hose reel, pump, nozzle and accessories are not included

Ref.	Descrip.	Capacity	Width	Depth	Height	Weight	Packaging
		l	mm	mm	mm	kg	mm

090-8070-000	Multitank	700	1135	757	1190	65	1135x757x1190
090-8100-000	Multitank	1000	1135	757	1590	80	1135x757x1590

090-8200-030	Supp.bracket	-	727	370	114	12,5	745x390x150
---------------------	--------------	---	-----	-----	-----	------	-------------

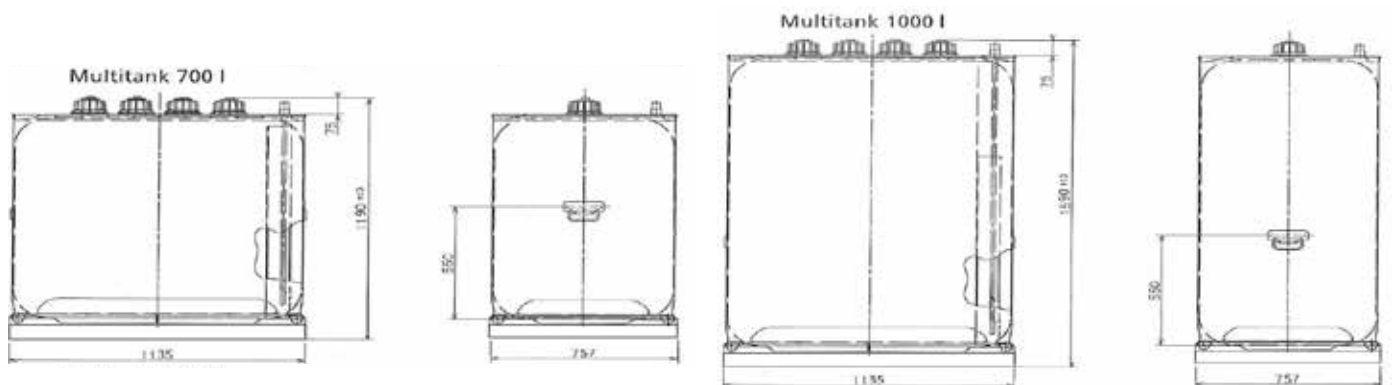

POLYETHYLENE TANK FOR DIESEL AND AdBlue® “Tank in tank”



Double-wall rigid polyethylene tank for diesel and AdBlue® for professional and private use, with built-in retention bucket, UV protection, anti-odor barrier SMP and seal of quality proofed barrier. Tank's accessory: support to install the AdBlue® and diesel “Compact” kit.




Ref.	Descrip.	Flow rate	Width	Depth	Height	Weight	Packaging
		l	mm	mm	mm	kg	mm
090-9100-000	Tank in Tank	1000	1420	660	1685	59	1420x660x1685
090-9150-000	Tank in Tank	1500	1720	770	1720	90	1720x770x1720
090-9200-000	Tank in Tank	2000	2220	770	1700	145	2200x770x1700



097-9900-008	Supp.bracket	x1000	356	470	600	7	600x356x470
097-9900-009	Supp.bracket	x1500	356	285	600	6	600x356x285
097-9900-010	Supp.bracket	x2000	356	350	600	6,2	600x356x350



1000 l

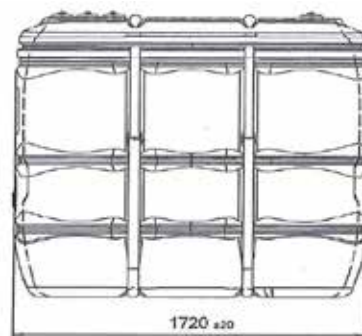

1500 l

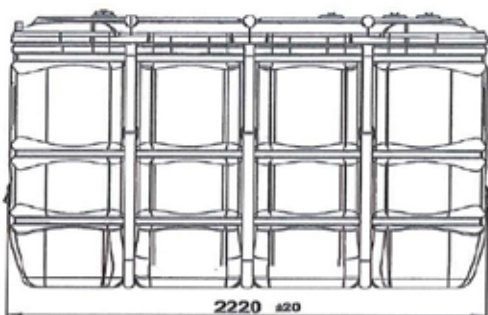

2000 l

Stainless steel support bracket



Filter group with double filtering for oil and diesel absorbing water and impurities. The high efficiency allows the filtering of large quantity of diesel in a single operation. The first stage with filtering capacity equal to a 125 μ , second stage with filtering capacity equal to 30 μ with water separating. Group equipped with delivery hose and suction hose. Big diameter wheels suitable for moving on every ground, solid structure in painted tubular.

“MecFilter” series composed by:



Art. 091-5081-060 12V Pump - power cable (sec. 4 mmq, 4 m lenght)
with pincers and fuse - 60 l/min



Art. 091-5095-060 Electric pump 230V 50Hz 60 l/min



Art. 091-5099-070 Electric pump 115V 60Hz 70 l/min



Art. 908-0516-040 Connection hose \varnothing 20 mm M-M 1” 4 m lenght



Art. 095-5450-040 Suction kit with PVC hose



Art. 093-5200-000 Aluminium manual nozzle MC80 Flow rate 80 l/min



Art. 094-5250-030 Water separating delivery filter for diesel 30 μ - 70 l/min




Art. 094-5251-030 Cartridge for water separating delivery filter for diesel 30 μ




Art. 094-5255-125 Delivery filter with stainless steel cartridge for diesel 125 μ - 100 l/min

WHEELED FILTER GROUP FOR DIESEL "MecFilter"



Ref.	Descrip.	Flow rate	Voltage	Power	Conn. hose	Inlet-Outlet	Nozzle	Weight	Packaging
	MecFilter	l/min	AC V./Hz DC Volt	W	Ø mm / L m	BSPG		kg	mm

090-6000-230	Diesel Filter	60	230/50	460	20 / 4	F 1" - F 1"	Manual	45,00	530X520X1110
090-6000-115	Diesel Filter	60	115/60	575	20 / 4	F 1" - F 1"	Manual	46,00	530X520X1110
090-6000-012	Diesel Filter	60	12	336	20 / 4	F 1" - F 1"	Manual	45,00	530X520X1110

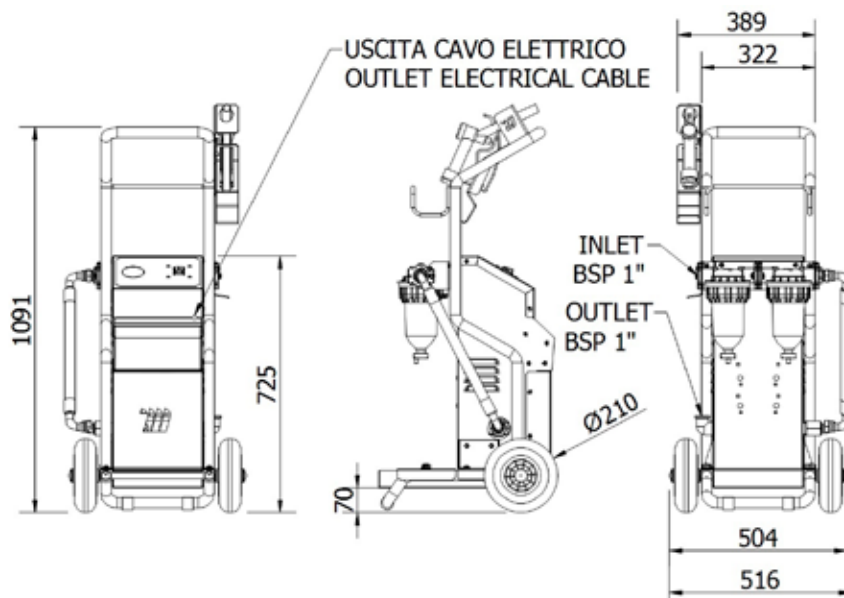

Filter group for oil and grease absorbing water and impurities. The high efficiency allows the filtering of large quantity of diesel in a single operation. Group equipped with delivery hose and suction hose. Big diameter wheels suitable for moving on every ground, solid structure in painted tubular.

“EcoFilter” series composed by:



Art. 091-5095-060 Electric pump for diesel 230V 50Hz 60 l/min



Art. 091-5099-070 Electric pump for diesel 115V 60Hz 70 l/min



Art. 091-5500-025 Electric pump for oils and lubricants 230V-50Hz 25 l/min



Art. 908-0516-040 Connection hose ø 20 mm M-M 1” 4 m length



Art. 095-5450-040 Suction kit with PVC hose



Art. 093-5200-000 Aluminium manual nozzle MC80 Flow rate 80 l/min



Art. 094-5240-000 Water separating delivery filter for diesel/oil 70 l/min

Art. 094-5280-010 Oil filter 100 l/min 10 µ - Connection F 1”

Art. 094-5281-010 Cartridge for oil filter 10 µ


WHEELED FILTER GROUP FOR OIL / DIESEL "EcoFilter"




090-6020-230



090-6021-230

Ref.	Descrip.	Flow rate	Voltage	Power	Conn. hose	Inlet-Outlet	Nozzle	Weight	Packaging
	EcoFilter	l/min	AC V./Hz DC Volt	W	Ø mm / L m	BSPG		kg	mm

090-6020-230	Diesel Filter	60	230/50	460	20 4m	F 1" - F 1"	Manual	24,00	990X350X405
090-6020-115	Diesel Filter	70	115/60	575	20 4m	F 1" - F 1"	Manual	25,00	990X350X405
090-6021-230	Oil Filter	25	230/50	850	20 4m	F 1" - F 1"	Manual	26,40	990X350X405

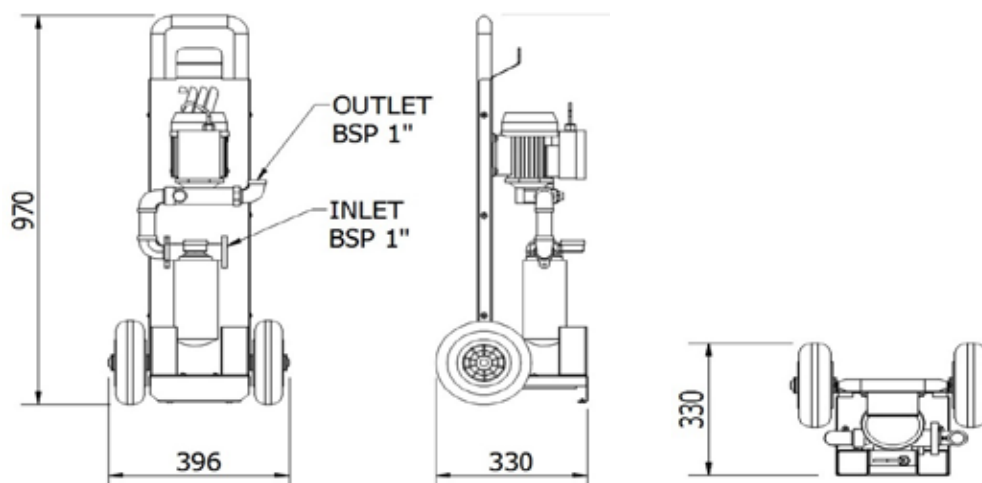

Battery electric vane self-priming pump 12 or 24V direct electricity, constituted by cast iron body, sintered steel impeller and acetyl resin vane. Built-in by-pass valve and stainless steel filter.



Battery electric pump 45 l for diesel transfer equipped with:

Power cable 2 m length sec. 2,5 mmq with pincers and fuse

Power cable 4 m length sec. 4 mmq with pincers and fuse

Self-priming rotary electric pump

Cast iron body

By-pass valve

DC engine


Stainless steel filter 100 micron

Motor protection rating IP55

Ref.	Flow rate	Voltage	Power	Electricity	Cable length	Inlet-Outlet	Duty cycle	Max suction height	Weight	Packaging
	l/min	DC Volt	W	A	m	BSPG	min	m	kg	mm

091-5080-045	45	12	264	18	2	F 1"-F 1"	40	3	5,10	250X195X210
091-5081-045	45	12	264	18	4	F 1"-F 1"	40	3	5,10	250X195X210
091-5082-045	45	24	312	10	2	F 1"-F 1"	40	3	5,10	250X195X210
091-5083-045	45	24	312	10	4	F 1"-F 1"	40	3	5,10	250X195X210

Dimensions:

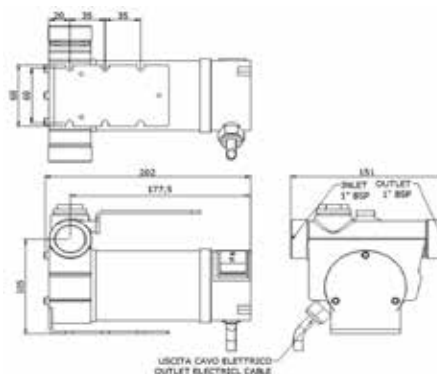

BATTERY ELECTRIC PUMPS FOR DIESEL FUEL TRANSFER



Battery electric vane self-priming pump 12 or 24V direct electricity, constituted by cast iron body, sintered steel impeller and acetyl resin vane. Built-in by-pass valve and stainless steel filter.




Battery electric pump 60 l for diesel transfer equipped with:

- Power cable 4 m length sec. 4 mmq with pincers and fuse
- Self-priming rotary electric pump
- Cast iron body
- By-pass valve
- DC Engine
- Stainless steel filter 100 micron
- Motor protection rating IP55

Ref.	Flow rate	Voltage	Power	Electricity	Cable length	Inlet-Outlet	Duty cycle	Max suction height	Weight	Packaging
	l/min	DC Volt	W	A	m	BSPG	min	m	kg	mm

091-5081-060	60	12	336	19	4	F 1"-F 1"	40	3	6,70	250X195X210
091-5083-060	60	24	432	11	4	F 1"-F 1"	40	3	6,70	250X195X210

Dimensions:

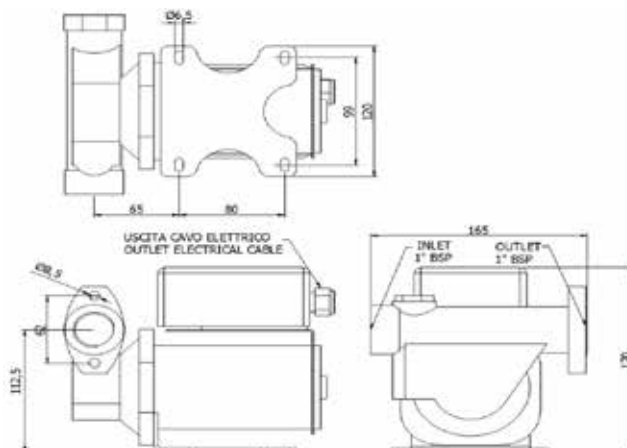

ELECTRIC PUMPS FOR DIESEL FUEL TRANSFER



Electric pumps 230V, volumetric self-priming vane. They are equipped with asynchronous induction self-ventilated engine with motor protection rating IP55, insulation class type F, internal protection. Built-in by-pass valve and stainless steel filter.




Electric pump for diesel fuel transfer 60 l equipped with:

- Power cable 2 m length, Schuko plug
- Self-priming rotary electric pump
- Cast iron body
- By-pass valve
- AC Engine
- Stainless steel filter 100 micron
- Motor protection rating IP55

Ref.	Flow rate	Voltage	Power	Electricity	Length Cable	Inlet-outlet	Duty cycle	Weight	Packaging
	l/min	AC V./Hz	W	A	m	BSPG	min	kg	mm

091-5095-060	60	230/50	460	1,95	2	F 1"-F 1"	Contin.	7,60	250X195X210
--------------	----	--------	-----	------	---	-----------	---------	------	-------------

Dimensions:

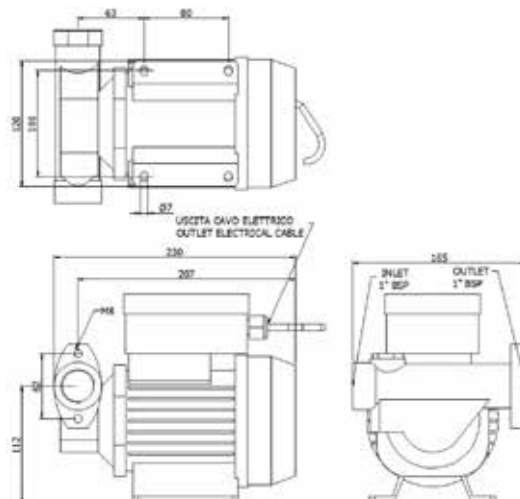

Electric pumps 115 - 230V - 400V, volumetric self-priming vane. They are equipped with asynchronous induction self-ventilated with motor protection rating IP55, insulation class type F, internal protection. Built-in by-pass valve and stainless steel filter.



Electric pump 70 l for diesel fuel transfer equipped with:

- Power cable 2 m length, Schuko plug
- Self-priming rotary electric pump
- Cast iron body
- By-pass valve
- AC Engine
- Stainless steel filter 100 micron
- Motor protection rating IP55


Ref.	Flow rate	Voltage	Power	Electricity	Cable length	Inlet-outlet	Duty cycle	Weight	Packaging
	l/min	AC V./Hz	W	A	m	BSPG	min	kg	mm

091-5098-070	70	230/50	552	2,9	2	F 1"-F 1"	Contin.	8,60	300X215X230
---------------------	-----------	--------	-----	-----	---	-----------	---------	------	-------------

091-5099-070	70	115/60	575	6	2	F 1"-F 1"	Contin.	8,60	300X215X230
---------------------	-----------	--------	-----	---	---	-----------	---------	------	-------------

091-5097-070	70	400/50	304	1,1	2	F 1"-F 1"	Contin.	9,00	300X215X230
---------------------	-----------	--------	-----	-----	---	-----------	---------	------	-------------

Dimensions:

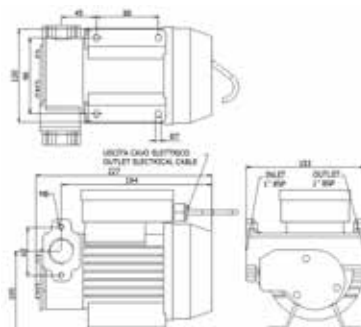

ELECTRIC PUMPS FOR DIESEL FUEL TRANSFER



Electric pump 115 o 230V, volumetric self-priming vane. They are equipped with asynchronous induction self-ventilated engine with motor protection rating IP55, insulation class type F, internal protection. Built-in by-pass valve and stainless steel filter.



Electric pump 100 l for diesel fuel transfer equipped with:


- Power cable 2 m length, Schuko plug
- Self-priming rotary electric pump
- Cast iron body
- By-pass valve
- AC engine
- Stainless steel filter 100 micron
- Motor protection rating IP55

Ref.	Flow rate	Voltage	Power	Electricity	Cable length	Inlet-outlet	Duty cycle	Weight	Packaging
	l/min	AC V./Hz	W	A	m	BSPG	min	kg	mm

091-5100-100	100	230/50	805	4,5	2	F 1"-F 1"	Contin.	14,00	300X215X230
--------------	-----	--------	-----	-----	---	-----------	---------	-------	-------------

091-5101-100	100	115/60	977	8,5	2	F 1"-F 1"	Contin.	14,00	300X215X230
--------------	-----	--------	-----	-----	---	-----------	---------	-------	-------------

Dimensions:

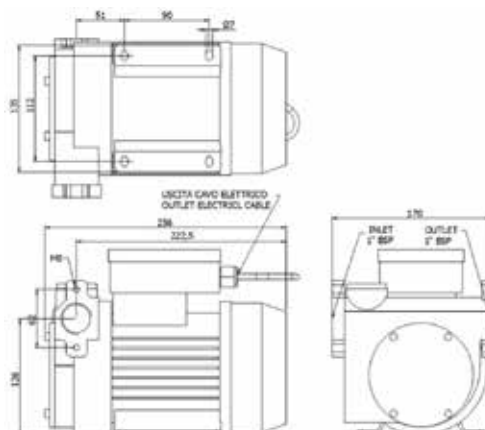

Electric pumps 230V, volumetric self-priming vane. They are equipped with asynchronous induction self-ventilated with motor rate protection IP55, insulation class type F, internal protection. Built-in by-pass valve and stainless steel filter.




Electric pump 150 l for diesel fuel transfer equipped with:

- Power cable 2 m length, Schuko plug
- Self-priming rotary electric pump
- Cast iron body
- By-pass valve
- AC Engine
- Stainless steel filter 100 micron
- Motor protection rating IP55

Ref.	Flow rate	Voltage	Power	Electricity	Cable length	Inlet-Outlet	Duty cycle	Weight	Packaging
	l/min	AC V./Hz	W	A	m	BSPG	min	kg	mm

091-5100-150	150	230/50	1725	14,5	2	F 1" - F 1"	S2 30 min	16,70	290X190X250
--------------	-----	--------	------	------	---	-------------	-----------	-------	-------------

Dimensions:

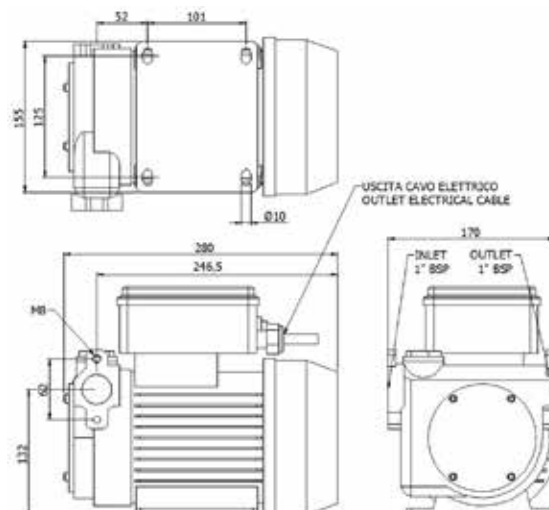

Electric pumps “CarbuMec” available in 4 versions: 230V, 110V, 12V, 24V. They are composed by plastic body and anti-siphon security system. In case of accidental damage of the delivery hose or of the delivery nozzle, the anti-siphon security system provides for avoiding the liquid’s spread in the working space for siphon-effect.



Electric pump 35/40 I for diesel fuel transfer equipped with:

Plastic telescopic suction hose M1”

Plastic body

Protection rate IPx4

Switch ON/OFF


Versions 12V and 24V equipped with pincers and batteries

Pump body thread M64x2 and 2”

Ref.	Flow rate	Voltage	Power	Electricity	Cable length	Duty cycle	Max suction height	Weight	Packaging
	l/min	AC V./Hz DC Volt	W	A	m	min	m	kg	mm

091-5600-040	40	230/50	224	1,23	3	Contin.	3	2,70	410X400X270
091-5602-040	40	115/60	320	3,64	3	Contin.	3	2,70	410X400X270
091-5610-035	35	12	110	6,32	3	Contin.	3	2,70	410X400X270
091-5612-035	35	24	135	3,70	3	Contin.	3	2,70	410X400X270

Dimensions:

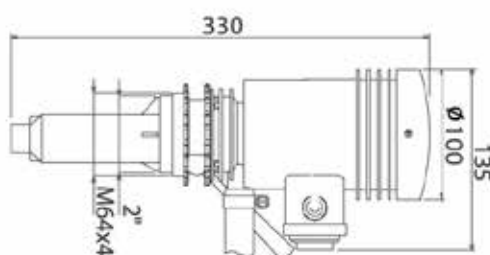

ELECTRIC PUMPS FOR OIL TRANSFER "VISCOMEC"

12V-24V DC electric pumps with gear rotor for the transfer of oils and lubricants with viscosity up to 600cSt (oil SAE 80W90).

They are suitable for applications where it is necessary to transfer oil from drums.

Art. 091-5480-010

Electric pump for oils and lubricants transfer

12V 10l/min operating pressure 4-6 bar

Power cable 2 m length, with pincers and protection fuse

Self-priming rotary electric pump

Cast iron body

Sintered steel gears

By-pass valve

DC Engine

Motor protection rating IP55



Art. 091-5482-010

Electric pump for oils and lubricants transfer

24V 10l/min operating pressure 4-6 bar

Power cable 2 m length, with pincers and protection fuse

Self-priming rotary electric pump


Cast iron body

Sintered steel gears

By-pass valve

DC Engine

Motor protection rating IP55

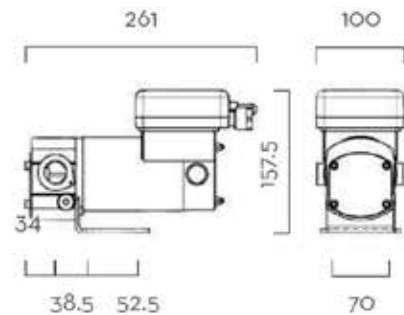

Volumetric electric pumps and 230V for oils and lubricants transfer, the suction filter is supplied.

Art. 091-5500-030

Electric pump for oils and lubricants 230V-50Hz 30 l/min

Power cable 2 m length, Schuko plug

Self-priming rotary electric pump


Cast iron body

By-pass valve

AC Engine

Stainless steel filter 100 micron

Motor protection rating IP55

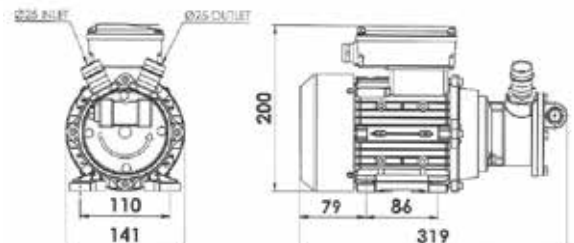

Ref.	Flow rate	Voltage	Power	Electricity	Cable length	Inlet-outlet	RPM	Weight	Packaging
	l/min	AC V./Hz DC Volt	W	A	m	BSPG	min	kg	mm
091-5480-010	10	12	300	35	2	F 3/4" BSP	2900	4,90	345X175X255
091-5482-010	10	24	300	18	2	F 3/4" BSP	2900	4,90	345X175X255
091-5500-030	30	230/50	850	3	2	F 1" BSP	1800	10	390X190X250

ELECTRIC PUMPS FOR LUBRICANTS TRANSFER



230V AC self-priming volumetric vane electric pumps for oils and lubricants transfer with viscosity up to 500 cSt. They are equipped with asynchronous self-ventilated induction electric engine with IP55 protection, F type insulation class, thermal protection. Integrated and adjustable by-pass valve to grant the functioning also when you don't press the nozzle's trigger. Noise inferior to 70 dB.



Art. 091-5500-025

Electric pump for lubricants transfer of 230V-50HZ 25 l/min

Art. 091-5500-050

Electric pump for lubricants transfer of 25 l/min - 50 l/min


Supply cable L. 2 mt, with Schuko plug

Rotative self-priming electric pump

Cast iron body By-pass valve

AC engine Max pressure 6 bar

Level of engine protection

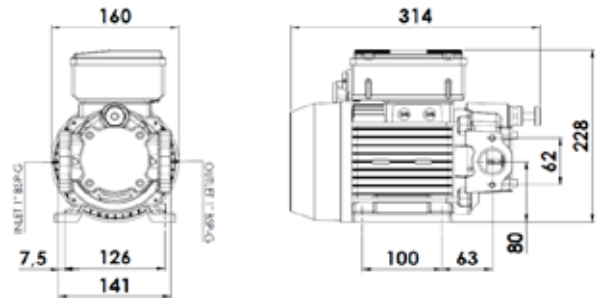

Ref.	Flow rate	Voltage	Power	Electricity	Cable length	Inlet Outlet	Duty cycle	Weight	Packaging
	l/min	AC V./Hz	W	A	m	BSPG	min	kg	mm
091-5500-025	25	230/50	828	4,6	2	F 1"-F 1"	contin.	14,10	390X190X250
091-5500-050	50	230/50	1081	7	2	F 1"-F 1"	contin.	14,10	390X190X250

Art. 091-6000-000

Universal support plate with handle, suitable for 230V / 115V pumps:



Pump not included

Ref.	Description	Dimensions	Weight	Packaging
		width x depth x height (mm)	kg	mm
091-6000-000	Support plate with handle	234x320x370	4,00	245x335x110

MECHANICAL VOLUMETRIC FLOW METERS

Mechanical volumetric flow meter able to provide high degree of precision for the measurement of diesel for private use. Equipped with a totalizer and a partial meter, resettable with side knob, allowing the user to change the output direction of the fuel as needed. The meters are also fitted with regulation screws for precision adjustment. The flow meter can be applied to motor pumps or for gravity.



Art. 092-5103-000 Mechanical volumetric flow meter 3C
min-max flow rate 20-120 l/min

6 digits totalizer
3 digits partial totalizer (max 999 l)
Allowed fluids: diesel, light oil



Art. 092-5104-000 Mechanical volumetric flow meter 4C
min-max flow rate 20-120 l/min

8 digits totalizer
4 digits partial totalizer (max 9999 l)
Allowed fluids: diesel, light oil



Art. 092-5104-G00 Mechanical volumetric flow meter for gallons 4C
min-max flow rate 5-32 g/min

8 digits totalizer
4 digits partial totalizer (max 9999 g)
Allowed fluids: diesel, light oil

Ref.	Flow rate	Pressure	Accuracy	Inlet - Outlet	Weight	Packaging
	l/min	bar	%	BSPG	Kg	mm
092-5103-000	20-120 l/min	10	+/- 1	F 1" - F 1"	2	220X150X220
092-5104-000	20-120 l/min	10	+/- 1	F 1" - F 1"	2	220X150X220
092-5104-G00	5-32 Gallons	10	+/- 1	F 1" - F 1"	2	220X150X220

Digital flow meter with swinging disc system. It is used for the diesel measurement for private use. The flow meter works through the liquid's passage in to the measurement chamber, the liquid makes the swinging disc moving through special transmission system, it produces a magnetic signal read by the electronic device. It is possible to rotate the dial to facilitate the reading in every assembly position of the device. Flow meter of easy assembly, it can be installed on rigid and flexibles pipes, tanks, pumps and for gravity.



**Art. 092-5110-000 Digital volumetric flow meter
min-max flow rate 5-120 l/min**

6 digits totalizer
6 digits partal totalizer
Allowed fluids: diesel, light oil
Measurement unit: L (liters), G (U.S. gallons),
Q (Quarters), P (Pints)



**Art. 092-5111-000 Digital volumetric flow meter with cable
min-max flow meter 5-120 l/min**

6 digits totalizer
6 digits partal totalizer
Allowed fluids: diesel, light oil
Measurement unit: L (liters), G (U.S. gallons),
Q (Quarters), P (Pints)

Ref.	Flow rate	Pressure	Accuracy	Inlet - Outlet	Weight	Packaging
	l/min	bar	%	BSPG	Kg	mm

092-5110-000	5-120	3,5	+/- 0,5	F 1" - F 1"	1,43	200X170X115
--------------	-------	-----	---------	-------------	------	-------------

092-5111-000	5-120	3,5	+/- 0,3	F 1" - F 1"	1,45	200X170X115
--------------	-------	-----	---------	-------------	------	-------------

Turbine or with gears flow meters that feature high precision performance for the measurement of non-commercial use diesel. The software enables full control of dispensing system thank to the various functions featured. It can be applied on motor pumps or for gravity.



Art. 092-5124-000 Digital turbine flow meter MEC 24
min-max flow rate 7/120 l/min

6 digits totalizer (non resettable)
6 digits partial (resettable)
Allowed fluids: diesel, low viscosity oil



Art. 092-5130-000 Digital flow meter with gears MGE-110
min-max flow rate 5-110 l/min

6 digits totalizer (non resettable)
6 digits partial (resettable)
Allowed fluids: diesel, oil



Art. 092-5140-000 Digital flow meter with gears MGE-250
min-max flow rate 10-250 l/min

6 digits totalizer (non resettable)
6 digits partial (resettable)
Allowed fluids: diesel, oil



Art. 092-5150-000 Digital flow meter with gears MGE-400
min-max flow rate 15-400 l/min

6 digits totalizer (non resettable)
6 digits partial (resettable)
Allowed fluids: diesel, oil

Ref.	Flow rate	Pressure	Accuracy	Inlet-outlet	Weight	Packaging
	l/min	bar	%	BSPG	Kg	mm

092-5124-000	7-120	10	+/- 1	F 1" - F 1"	0,4	145X135X85
---------------------	--------------	----	-------	-------------	-----	------------

092-5130-000	5-110	50	+/- 0,5	F 1" - F 1"	1	150X140X85
---------------------	--------------	----	---------	-------------	---	------------

092-5140-000	10-250	50	+/- 0,5	F 1.1/2" - F 1.1/2"	2,7	180X175X165
---------------------	---------------	----	---------	---------------------	-----	-------------

092-5150-000	15-400	50	+/- 0,5	F 2" - F 2"	4,3	193X145X141
---------------------	---------------	----	---------	-------------	-----	-------------

ELECTRONIC PULSED VOLUMETRIC FLOW METERS



Electronic pulsed volumetric flow meters that offer high precision performance for diesel measurement for private use.



Art. 092-5170-110 Mechanical pulsed flow meter MGI-110
 min-max flow rate 5-110 l/min
 nr. 41 pulses/liter



Art. 092-5170-250 Mechanical pulsed flow meter MGI-250
 min-max flow rate 10-250 l/min
 nr. 11 pulses/liter



Art. 092-5170-400 Mechanical pulsed flow meter MGI-400
 min-max flow rate 15-400 l/min
 nr. 5,5 pulses/liter

Ref.	Flow rate	Pressure	Accuracy	Inlet- Outlet	Weight	Packaging
	l/min	bar	%	BSPG	Kg	mm
092-5170-110	5-110	50	+/- 0,5	F 1" - F 1"	1,1	123X90X123
092-5170-250	10-250	50	+/- 0,5	F 1.1/2" - F 1.1/2"	2,3	159X100X141
092-5170-400	15-400	50	+/- 0,5	F 2" - F 2"	4,3	193X145X141

Electronic control unit that offers high precision performance for the diesel measurement and delivery for private use.



Art. 092-5200-230 Electronic control unit MecGest 110/230V 50Hz
Software included
Preselection and multi-users consumption management



Art. 092-5220-000 Codified communication kit USB key reader for PC



Art. 092-5300-000 Red key - Manager - nr. 1 pc.



Art. 092-5300-001 Blue key - User - nr. 1 pc.



Art. 092-5300-010 Kit blue keys - Users- nr. 10 pc.



Art. 092-5350-001 Codified Kit Lan Connection USB-RS485



Art. 092-5402-100 Shielded signal cable 2 poles 100 m length

Manual dispensing nozzles made up of plastic and aluminium body, equipped with swivel connection. For their features, they can be applied on every transfer system, also operating for gravity.



Art. 093-5199-000 Manual plastic nozzle "MP120"

for diesel fuel transfer
Flow rate 120 l/min
Plastic body
Swivel connection F 1"



Art. 093-5200-000 Manual nozzle "MC80"

for diesel fuel transfer
Flow rate 80 l/min
Aluminium body
Swivel connection F 1"



Art. 093-5202-000 Aluminium manual nozzle "MC100"

for diesel fuel transfer
Flow rate 100 l/min
Aluminium body with plastic lever
Swivel connection F 1"

Ref.	Model	Fluid	Flow rate	Inlet	Weight	Ø End	Packaging
		tipo	l/min	BSPG	Kg	mm	mm

093-5199-000	MP120	Diesel	120	F 1"	0,5	29,00	400X175X57
---------------------	-------	--------	------------	------	-----	-------	------------

093-5200-000	MC80	Diesel	80	F 1"	0,85	24,00	400X175X57
---------------------	------	--------	-----------	------	------	-------	------------

093-5202-000	MC100	Diesel	100	F 1"	0,75	25,00	400X175X57
---------------------	-------	--------	------------	------	------	-------	------------

Automatic dispensing nozzles composed by aluminium body. Equipped with a device that shuts off the flow automatically when the tank is full. Suitable for quick and safe refuel, provided with swivel-connection.



Art. 093-5210-000 Automatic nozzle "PA60"

for diesel fuel transfer
Flow rate 70 l/min
Aluminium body
Swivel connection F 1"



Art. 093-5215-000 Automatic nozzle "PA90"

for diesel fuel transfer
Flow rate 90 l/min
Aluminium body
Swivel connection F 1"



Art. 093-5220-000 Automatic nozzle "PA120"

for diesel fuel transfer
Flow rate 120 l/min
Aluminium body
Swivel connection F 1"

Ref.	Model	Fluid	Flow rate	Inlet	Weight	Ø End	Packaging
		tipo	l/min	BSPG	Kg	mm	mm

093-5210-000	PA60	Diesel	70	F 1"	1,3	24,00	400X175X57
---------------------	------	--------	-----------	------	-----	-------	------------

093-5215-000	PA90	Diesel	90	F 1"	1,65	27,00	400X175X57
---------------------	------	--------	-----------	------	------	-------	------------

093-5220-000	PA120	Diesel	120	F 1"	1,69	30,00	400X175X57
---------------------	-------	--------	------------	------	------	-------	------------

AUTOMATIC DISPENSING NOZZLE FOR DIESEL



Automatic dispensing nozzles composed by aluminium body. Equipped with a device that shuts off the flow automatically when the tank is full. Suitable for quick and safe refuel, provided with swivel connection.



Art. 093-5221-080 Automatic nozzle "ZVA80"

for diesel fuel transfer
Flow rate 80 l/min
Aluminium body
Swivel connection F 1"



Art. 093-5221-120 Automatic nozzle "ZVA120"

for diesel fuel transfer
Flow rate 120 l/min
Aluminium body
Swivel connection F 1"



Art. 093-5222-280 Automatic nozzle "PA280"

for diesel fuel transfer
Flow rate 280 l/min
Aluminium body
Swivel connection F 1.1/2"

Ref.	Model	Fluid	Flow rate	Inlet	Weight	Ø End	Packaging
		tipo	l/min	BSPG	Kg	mm	mm

093-5221-080	ZVA80	Diesel	80	F 1"	1,20	24,80	400X175X57
---------------------	-------	--------	-----------	------	------	-------	------------

093-5221-120	ZVA120	Diesel	120	F 1"	1,65	31,00	400X175X57
---------------------	--------	--------	------------	------	------	-------	------------

093-5222-280	PA280	Diesel	280	F 1.1/2"	2,20	39,50	420x220x573
---------------------	-------	--------	------------	----------	------	-------	-------------



Art. 093-5310-003 Cover for Automatic nozzle PA60 - Blue
Art. 093-5312-003 Cover for Automatic nozzle PA90/120 - Blue



Art. 093-5310-004 Cover for Automatic nozzle PA60 - Yellow
Art. 093-5312-004 Cover for Automatic nozzle PA90/120 - Yellow



Art. 093-5310-007 Cover for Automatic nozzle PA60 - Red
Art. 093-5312-007 Cover for Automatic nozzle PA90/120 - Red



Art. 093-5310-008 Cover for Automatic nozzle PA60 - Green
Art. 093-5312-008 Cover for Automatic nozzle PA90/120 - Green



Art. 093-5224-506 Swiveling connector M 3/4" - F 1"



Art. 093-5224-606 Swiveling connector M 1" - F 1"



Art. 093-5224-808 Swiveling connector M 1.1/2" - F 1.1/2"

Ref.	Model	Fluid	Flow rate	Inlet	Weight	Packaging
		Type	l/min	BSPG	Kg	mm

093-5224-506	PA60	Diesel	70	M 3/4" - F 1"	0,3	50x50x60
---------------------	------	--------	----	---------------	-----	----------

093-5224-606	PA90/120	Diesel	120	M 1" - F 1"	0,4	50x50x60
---------------------	----------	--------	-----	-------------	-----	----------

093-5224-808	PA280	Diesel	280	M 1.1/2" - F 1.1/2"	0,8	70x70x80
---------------------	-------	--------	-----	---------------------	-----	----------

WATER SEPARATING DELIVERY FILTERS



Water separating cartridge filter. The engines use the diesel delivered by the station, so the filter ensures their protection. It separates and absorbs the water in the delivered diesel.



Art. 094-5240-000 Water separating delivery filter for diesel/gasoline 70 l/min
Inlet-outlet connection F1"
Filtering capacity 30 μ



Art. 094-5241-000 Water separating cartridge diesel gasoline for filter 70 l/min
Dimensions 213x96 mm
Filtering capacity 30 μ



Art. 094-5245-000 Water separating delivery filter for diesel/gasoline 150 l/min
Inlet-outlet connection F1"
Filtering capacity 30 μ

Art. 094-5246-000 Water separating cartridge diesel gasoline for filter 150 l/min
Dimensions 269x128 mm
Filtering capacity 30 μ

Art. 094-5248-000 Water separating transparent delivery filter for diesel/gasoline 105 l/min
Inlet-outlet connection F1"
Filtering capacity 5 μ

Art. 094-5249-000 Water separating cartridge diesel gasoline for filter 105 l/min
Dimensions 100x210 mm
Filtering capacity 5 μ

Art. 094-5249-025 Water separating cartridge diesel gasoline for filter 105 l/min
Dimensions 100x210 mm
Filtering capacity 25 μ

Ref.	Filter capacity	Fluid	Flow rate	Inlet	Weight	Packaging
	μ	type	l/min	BSPG	Kg	mm
094-5240-000	30	Diesel	70	F 1" - F 1"	1,4	200X225X135
094-5241-000	30	Diesel	70	-	0,75	112X112X213
094-5245-000	30	Diesel	150	F 1" - F 1"	2,55	170X170X355
094-5246-000	30	Diesel	150	-	1,7	170X170X355
094-5248-000	5	Diesel	105	F 1" - F 1"	2,8	225X185X325
094-5249-000	5	Diesel	105	-	1,5	170X170X213
094-5249-025	25	Diesel	105	-	1,5	170X170X213

Water separating cartridge filter. The engines use the diesel delivered by the station, so the filter ensures their protection. It separates and absorbs the water in the delivered diesel.



Art. 094-5250-030

Art. 094-5250-030 Water separating delivery filter for diesel 70 l/min 30 μ

Inlet-outlet connection F1"

Art. 094-5251-030 Water separating cartridge diesel for filter 70 l/min

dimensions 75x138 mm
filtering capacity 30 μ



Art. 094-5250-005

Art. 094-5250-005 Impurities filter for diesel 70 l/min 5 μ

Inlet-outlet connection F1"

Art. 094-5251-005 Impurities paper cartridge for filter 70 l/min

dimensions 75x138 mm
filtering capacity 5 μ



Art. 094-5255-125

Art. 094-5255-125 Delivery filter with stainless steel cartridge for diesel 100 l/min

Inlet-outlet connection F1"

filtering capacity 125 μ

Art. 094-5256-125 Stainless steel cartridge for diesel filter 100 l/min

dimensions 75x110 mm
filtering capacity 125 μ



Art. 094-5300-060 Headboard filter holder

Flow rate 60/70 l/min

Art. 094-5300-100 Headboard filter holder

Flow rate 100/150 l/min

Ref.	Fluid type	Flow rate l/min	Filtering capacity	Inlet BSPG	Weight Kg	Packaging mm
094-5250-005	Diesel	70	5	F 1" - F 1"	1,50	300X180X150
094-5250-030	Diesel	70	30	F 1" - F 1"	1,50	300X180X150
094-5251-005	Diesel	70	5	-	0,50	100X100X150
094-5251-030	Diesel	70	30	-	0,50	100X100X150
094-5255-125	Diesel	100	125	F 1" - F 1"	1,50	300X180X150
094-5256-125	Diesel	100	125	-	0,75	100X100X150
094-5300-060	Diesel	60/70	-	F 1" - F 1"	0,60	200X170X115
094-5300-100	Diesel	100/150	-	F 1" - F 1"	0,85	200X170X115

SUCTION HOSE KITS FOR DIESEL



Art. 095-5284-000 Telescopic suction tube with foot valve
495<885 mm lenght
Inlet BSP-G M 1"



Art. 095-5430-020 Suction kit with PVC hose
Spiral PVC hose, Ø 25 2 m lenght
Plastic filter F1" with rubber holder Ø 25
Screw clamps 25x37



Art. 095-5440-020 Suction kit with PVC hose
Spiral PVC hose, Ø 25 2 m lenght
Plastic foot valve F1" with filter
Rubber holder Ø 25 - M 1"
Screw clamps 25x37



Art. 095-5440-040 Suction kit with PVC hose
Spiral PVC hose, Ø 25 4 m lenght
Plastic foot valve F1" with filter
Rubber holder Ø 25 - M 1"
Screw clamps 25x37



Art. 095-5450-020 Suction kit with PVC hose
Spiral PVC hose, Ø 25 2 m lenght
Brass foot valve F1" with stainless steel filter
Rubber holder Ø 25 - M 1"
Screw clamps 25x37



Art. 095-5450-040 Suction kit with PVC hose
Spiral PVC hose, Ø 25 4 m lenght
Brass foot valve F1" with stainless steel filter
Rubber holder Ø 25 - M 1"
Screw clamps 25x37



Art. 912-0600-500 Spiral PVC hose Ø25X35 50 m lenght

Ref.	Hose lenght	Dimensions	Inlet-outlet	Weight
	m	mm	BSPG	Kg

095-5285-000	604<1020 mm	25X37	F 1" - F 1"	1,1
095-5430-020	2	25X35	F 1" - F 1"	0,8
095-5440-020	2	25X35	F 1" - F 1"	1,0
095-5440-040	4	25X35	F 1" - F 1"	1,5
095-5450-020	2	25X35	F 1" - F 1"	1,1
095-5450-040	4	25X35	F 1" - F 1"	1,6
912-0600-500	50	25x35	Ø25	11,5

Antistatic rubber hose 10 bar with connections



Ref.	Hose Length	Ø hose	Dimensions	Inlet-outlet	Weight	Packaging
	m	G	mm	BSPG	Kg	mm

908-0516-020	2	3/4"	19x27	M 1" - M 1"	1,1	400X400X100
908-0516-040	4	3/4"	19x27	M 1" - M 1"	1,9	400X400X100
908-0516-060	6	3/4"	19x27	M 1" - M 1"	2,6	400X400X100
908-0516-100	10	3/4"	19x27	M 1" - M 1"	4,2	400X400X150
908-0506-100	10	3/4"	19x27	F 1" - M 1"	4,2	400X400X150
908-0506-150	15	3/4"	19x27	F 1" - M 1"	6,2	400X400X200
908-0506-200	20	3/4"	19x27	F 1" - M 1"	8,2	400X400X200
908-0506-300	30	3/4"	19x27	F 1" - M 1"	12,2	400X400X250
908-0506-400	40	3/4"	19x27	F 1" - M 1"	16,2	400X400X250

Antistatic rubber hose 10 bar with connections



Ref.	Hose length	Ø hose	Dimensions	Inlet-outlet	Weight	Packaging
	m	G	mm	BSPG	Kg	mm

908-0616-020	2	1"	25X35	M 1" - M 1"	1,5	400X400X100
908-0616-040	4	1"	25X35	M 1" - M 1"	2,8	400X400X150
908-0616-060	6	1"	25X35	M 1" - M 1"	4,2	400X400X150
908-0616-100	10	1"	25X35	M 1" - M 1"	6,8	500X500X200
908-0606-100	10	1"	25X35	F 1" - M 1"	6,8	500X500X200
908-0606-150	15	1"	25X35	F 1" - M 1"	10,1	500X500X200
908-0606-200	20	1"	25X35	F 1" - M 1"	13,4	500X500X200
908-0606-300	30	1"	25X35	F 1" - M 1"	20	500X500X200

Antistatic rubber hose 10 bar



Ref.	Hose length	Ø hose	Dimensions	Inlet-outlet	Weight	Packaging
	m	G	mm	BSPG	Kg	mm

908-0500-600	60	3/4"	19X27	-	24	-
908-0600-500	50	1"	25X35	-	33	-



Art. 099-6030-025 Plastic filter with rubber holder Ø 25



Art. 099-6020-006 Plastic foot valve with filter F 1"



Art. R35-0200-006 Brass foot valve F 1" with stainless steel filter



Art. R34-0100-006 Stainless steel filter M 1"



Art. R18-0855-206 Brass rubber holder M 1" x 20 mm



Art. R18-0855-256 Brass rubber holder M 1" x 25 mm



Art. R18-1211-006 L shaped elbow 90° F-F1"
chromed brass



Art. R18-1210-006 L shaped elbow 90° M-F1"
chromed brass



Art. R18-0302-606 Cylindrical nipple 1" x 1"



Art. R18-0302-605 Cylindrical nipple 1" x 3/4"



Art. R18-0502-605 Exagonal bushing M 1" - F 3/4"



Art. 095-5280-609 Quick coupling for pump fixing M 1" - M 2"



Art. F90-1000-030 Aluminium elbow flange 90° F-F 1" with O-ring



Art. F90-1010-006 Aluminium flange 1" d.80 with O-ring



Art. F90-6690-606 Swiveling joint M 1" / F 1"

FIXED VARNISHED HOSE REELS FOR DIESEL 10 bar



The automatic varnished steel hose reels with spring are suitable to hold flexible hoses for diesel delivery. They allow to unroll only the necessary hose length, improving their functionality.

Equipped with:

- Antistatic black rubber hose 10 bar
- Galvanized connections
- Galvanized swiveling joint 90°
- Viton seals

F-460



Ref.	Flow rate	Hose length	Ø hose	Inlet-Outlet
	l/min	m	G	
070-1308-500	80	without hose	-	F3/4"G-M1"G
070-1308-508	80	8	3/4"	F3/4"G-M1"G

F-550



Ref.	Flow rate	Hose length	Ø hose	Inlet-Outlet
	l/min	m	G	
070-1408-600	95	without hose	-	F1"G - M1"G
070-1408-510	85	10	3/4"	F1"G - M1"G
070-1408-515	85	15	3/4"	F1"G - M1"G
070-1408-610	93	10	1"	F1"G - M1"G

F-555



Ref.	Flow rate	Hose length	Ø hose	Inlet-Outlet
	l/min	m	G	
070-1508-600	95	without hose	-	F1"G - M1"G
070-1508-520	83	20	3/4"	F1"G - M1"G
070-1508-615	90	15	1"	F1"G - M1"G

F-560



Ref.	Flow rate	Hose length	Ø hose	Inlet-Outlet
	l/min	m	G	
070-1608-600	95	without hose	-	F1"G - M1"G
070-1608-530	80	30	3/4"	F1"G - M1"G
070-1608-540	75	40	3/4"	F1"G - M1"G
070-1608-620	87	20	1"	F1"G - M1"G
070-1608-630	85	30	1"	F1"G - M1"G

SWIVELLING VARNISHED HOSE REELS FOR DIESEL 10 bar

The automatic varnished steel hose reels with spring are suitable to hold flexible hoses for diesel delivery. They allow to unroll only the necessary hose length, improving their functionality. The rewinding of the hose is fast and safe and it allows to have a free and tidy work place, with ready-to-use equipment, ensuring high safety to workers.

S-460



Ref.	Flow rate	Hose length	Ø hose	Inlet-Outlet
	l/min	m	G	
071-1308-500	80	without hose	-	F3/4"G-M1"G
071-1308-508	80	8	3/4"	F3/4"G-M1"G

S-550



Ref.	Flow rate	Hose length	Ø hose	Inlet-Outlet
	l/min	m	G	



071-1408-600	95	without hose	-	F1"G - M1"G
071-1408-510	85	10	3/4"	F1"G - M1"G
071-1408-515	85	15	3/4"	F1"G - M1"G
071-1408-610	93	10	1"	F1"G - M1"G

S-555



Ref.	Flow rate	Hose length	Ø hose	Inlet-Outlet
	l/min	m	G	

071-1508-600	95	without hose	-	F1"G - M1"G
071-1508-520	83	20	3/4"	F1"G - M1"G
071-1508-615	90	15	1"	F1"G - M1"G

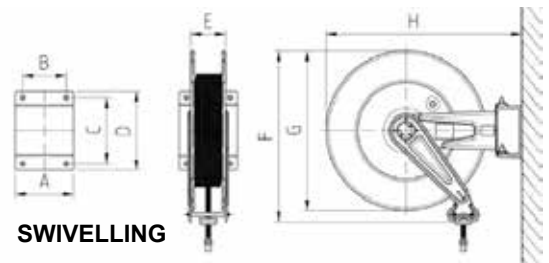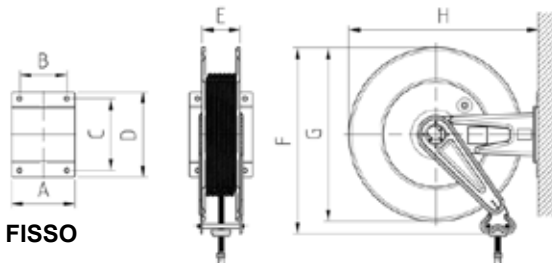

OVERALL DIMENSIONS

Mod.	A	B	C	D	E	F	G	H	Kg	Packaging (mm)
F-460	158	120	168	192	95	480	460	500	16,50<19,50	595X265X605
F-550	200	150	225	270	120	590	550	600	22,00<45,00	655X315X700
F-555	250	200	225	270	170	590	550	600	26,00<53,00	655X365X700
F-560	440	390	225	270	360	590	550	600	33,00<83,00	655X555X700
S-460	150	120	168	196	95	480	460	575	17,50<24,00	595X265X605
S-550	200	150	225	270	120	590	550	680	23,00<45,00	655X315X700
S-555	250	200	225	270	170	590	550	680	27,00<54,00	655X365X700

FIXED STAINLESS STEEL HOSE REELS FOR DIESEL 10 bar



The automatic stainless steel AISI 304 hose reels with spring are suitable to hold flexible hoses for diesel delivery. They allow to unroll only the necessary hose length, improving their functionality.

FX-460



Equipped with:

Antistatic black rubber hose 10 bar

Stainless steel connection

Stainless steel swivel joint 90° AISI 316

Viton seals

Ref.	Flow rate	Hose length	Ø hose	Inlet-Outlet
	l/min	m	G	
070-2308-500	80	without hose	-	F3/4"G-M1"G
070-2308-508	80	8	3/4"	F3/4"G-M1"G

FX-550



Ref.	Flow rate	Hose length	Ø hose	Inlet-Outlet
	l/min	m	G	
070-2408-600	95	without hose	-	F1"G - M1"G
070-2408-510	85	10	3/4"	F1"G - M1"G
070-2408-515	85	15	3/4"	F1"G - M1"G
070-2408-610	93	10	1"	F1"G - M1"G

FX-555



Ref.	Flow rate	Hose length	Ø hose	Inlet-Outlet
	l/min	m	G	
070-2508-600	95	without hose	-	F1"G - M1"G
070-2508-520	83	20	3/4"	F1"G - M1"G
070-2508-615	90	15	1"	F1"G - M1"G

FX-560



Ref.	Flow rate	Hose length	Ø hose	Inlet-Outlet
	l/min	m	G	
070-2608-600	95	without hose	-	F1"G - M1"G
070-2608-530	80	30	3/4"	F1"G - M1"G
070-2608-540	75	40	3/4"	F1"G - M1"G
070-2608-620	87	20	1"	F1"G - M1"G
070-2608-630	85	30	1"	F1"G - M1"G

The automatic stainless steel AISI 304 hose reels with spring are suitable to hold flexible hoses for diesel delivery. They allow to unroll only the necessary hose length, improving their functionality. The rewinding of the hose is fast and safe and it allows to have a tidy and free work place, with ready-to-use equipment, ensuring high safety to workers.

SX-460



Ref.	Flow rate	Hose lenght	Ø hose	Inlet-Outlet
	l/min	m	G	
071-2308-500	80	without hose	-	F3/4"G-M1"G
071-2308-508	80	8	3/4"	F3/4"G-M1"G

SX-550



Ref.	Flow rate	Hose lenght	Ø hose	Inlet-Outlet
	l/min	m	G	



071-2408-600	95	without hose	-	F1"G - M1"G
071-2408-510	85	10	3/4"	F1"G - M1"G
071-2408-515	85	15	3/4"	F1"G - M1"G
071-2408-610	93	10	1"	F1"G - M1"G

SX-555



Ref.	Flow rate	Hose lenght	Ø hose	Inlet-Outlet
	l/min	m	G	

071-2508-600	95	without hose	-	F1"G - M1"G
071-2508-520	83	20	3/4"	F1"G - M1"G
071-2508-615	90	15	1"	F1"G - M1"G

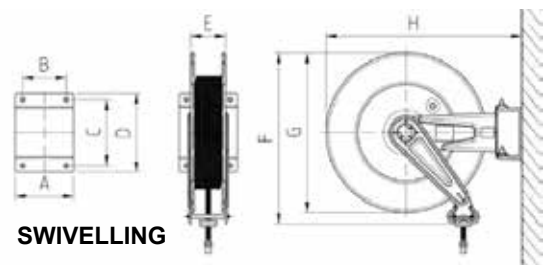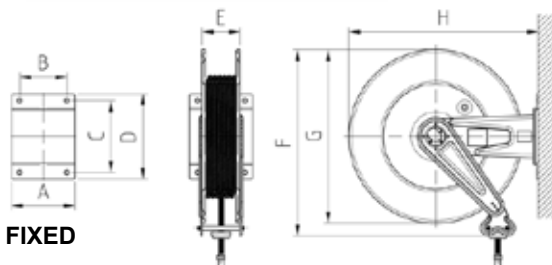

OVERALL DIMENSIONS

Mod.	A	B	C	D	E	F	G	H	Kg	Packaging (mm)
FX-460	158	120	168	192	95	480	460	500	16,5<19,5	595X265X605
FX-550	200	150	225	270	120	590	550	600	22<45	655X315X700
FX-555	250	200	225	270	170	590	550	600	26<53	655X365X700
FX-560	440	390	225	270	360	590	550	600	33<83	655X555X700
SX-460	150	120	168	196	95	480	460	575	17,5<24	595X265X605
SX-550	200	150	225	270	120	590	550	680	23<45	655X315X700
SX-555	250	200	225	270	170	590	550	680	27<54	655X365X700

JERRY CANS FOR FUEL TRANSFER



Steel cans made of cold-laminated steel 0,7mm and 0,8mm, treated to prevent rusting, suitable for fuel and lubricants transfer, external covering standard green color RAL 9007.



Art. 096-3905-000 Painted jerry can 5 l
 Colour green RAL 9007
 Certified UN-LNE-CE
 Quantity per box: 8 pcs



Art. 096-3910-000 Painted steel jerry can 10 l
 Colour green RAL 9007
 Certified UN-LNE-CE
 Quantity per box: 5 pcs



Art. 096-3920-000 Painted steel jerry can 20 l
 Colour green 9007
 Certified UN-LNE-CE
 Quantity per box: 4 pcs



Art. 096-3922-000 Rigid transfer filler with filter
 For jerry cans of 5, 10, 20 l

Art. 096-3923-000 Rigid transfer filler with filter
 For jerry cans of 5, 10, 20 l

Ref.	Capacity	Quantity for box	Weight	Packaging
	l	Pz.	Kg	mm

096-3905-000	5	8	1,6	590X500X290
096-3910-000	10	5	3	850X360X290
096-3920-000	20	4	3,8	690X350X480
096-3922-000	-	1	0,25	-
096-3923-000	-	1	0,19	-

Suitable for the distribution of the fuel, lubricants and gasoline. They are pre-arranged to be applied directly to the pump tank.



Art. 027-1325-000 Oil and diesel fuel transfer pump
Delivery capacity 0,30 l/stroke
Telescopic shank for 30/220 l barrels



Art. 027-1330-000 Oil and diesel fuel transfer pump
Delivery capacity 0,30 l/stroke
Telescopic shank for 30/220 l barrels



Art. 027-3705-000 Aluminium rotary barrel pump
Delivery capacity 0,27 l/revolution
Shank for 30/220 l barrels
Suitable for diesel, lubricants and gasoline transfer



Art. 027-3710-000 Aluminium rotary barrel pump H.D.
Delivery capacity 80 l/min
With suction hose and 2" adaptor
for the connection to the barrels
Delivery hose 1,80 m lenght
Suitable for diesel, lubricants and gasoline transfer

Ref.	Fluid type	Flow rate l/min	Weight kg	Packaging mm
------	------------	-----------------	-----------	--------------

027-1325-000	Diesel	0,30 stroke	2,37	500X160X70
027-1330-000	Diesel	0,30 stroke	2,24	300X150X100
027-3705-000	Diesel, gasoline and lubricants	0,27revolution	1,87	157X180X365
027-3710-000	Diesel, gasoline and lubricants	80 l/min	5,5	310X195X225