

# AIR-OPERATED INDUSTRIAL PUMPS FOR OIL AND SIMILAR FLUIDS

## Mod. 908 FLANGED

**COMPRESSION RATIO = 8:1**

**DELIVERY CAPACITY = 40 l/min**

### Art. 021-0908-000

Air-operated industrial oil pump Mod. 908 flanged  
Ratio=8:1 double-acting Delivery capacity 40 l/min  
For wall-fixing or fixed positions.  
Polyurethane seals

### Art. 021-0908-094


Air-operated industrial oil pump Mod. 908 flanged  
Ratio=8:1 double-acting Delivery capacity 40 l/min  
For drums of 180-220 l  
Polyurethane seals

### Art. 021-0908-125


Air-operated industrial oil pump Mod. 908 flanged  
Ratio=8:1 double-acting Delivery capacity 40 l/min  
For tanks of 750-1500 l  
Polyurethane seals



|              |        |       |   |
|--------------|--------|-------|---|
| 021-0908-000 | 23,000 | 0,110 | 1 |
| 021-0908-094 | 25,900 | 0,150 | 1 |
| 021-0908-125 | 27,600 | 0,180 | 1 |

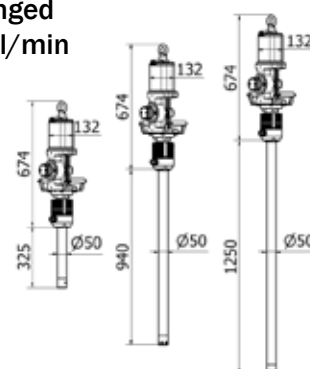

| Technical Data               |        | 021-0908-000 | 021-0908-094 | 021-0908-125 |
|------------------------------|--------|--------------|--------------|--------------|
| Compression ratio            |        | 8:1          | 8:1          | 8:1          |
| Working pressure             | bar    | 8            | 8            | 8            |
| Air consumption at 8 bar     | m³/min | 1,75         | 1,75         | 1,75         |
| Air inlet connection         | BSP    | F 1/2" G     | F 1/2" G     | F 1/2" G     |
| Fluid outlet connection      | BSP    | M 3/4" G     | M 3/4" G     | M 3/4" G     |
| Fluid delivery cap. at 8 bar | l/min  | 40           | 40           | 40           |
| Noise                        | dB     | 80           | 80           | 80           |
| Shank diameter               | mm     | 50           | 50           | 50           |
| Shank length                 | mm     | Modular F 1" | 940          | 1250         |
| For drums                    | l      | -            | 180-220      | 750-1500     |

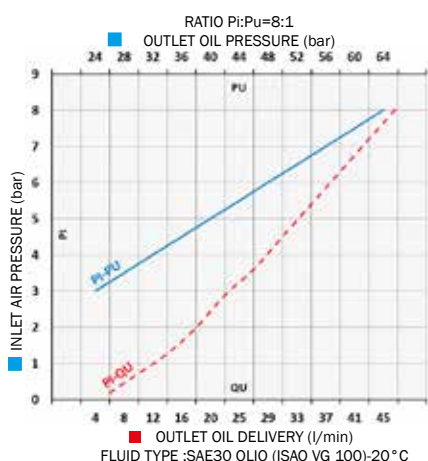

These pumps are advised for the transfer of low-high viscosity oil and similar fluids for medium-long distances. The delivery capacity of a pump varies according to particular applications and combinations. The operating pressure may vary between a minimum of 3 bar and a maximum of 8 bar.

The double-acting guarantees the delivery of a continuous and constant flow, suitable for installations on distribution facilities. To optimize the performance and the time-life of the air-operated pumps we advise to use filtered and lubricated air.