

Art. 023-1945-000

Complete installation for 2 drums of 180-220 l

Composed by:

Art.020-1195-000 N.2 Air-operated oil pumps **ratio=3:1 30 l/min**

Art.023-1930-000 N.1 Tank of dump complete with supporting structure

Art.070-1206-410 N.2 Hose reels with 1SC 1/2" hose 10,0 m length

Art.906-0424-015 N.2 1SC 1/2" hose F-F 1,5 m length


Art.024-1233-C00 N.2 Oil **digital** dispensing nozzles

Art. 023-1947-000

Complete installation for 2 drums of 180-220 l

Composed like Art.023-1945-000 but with:

Art.020-1205-000 n.2 Air-operated oil pumps **ratio=5:1 28 l/min**

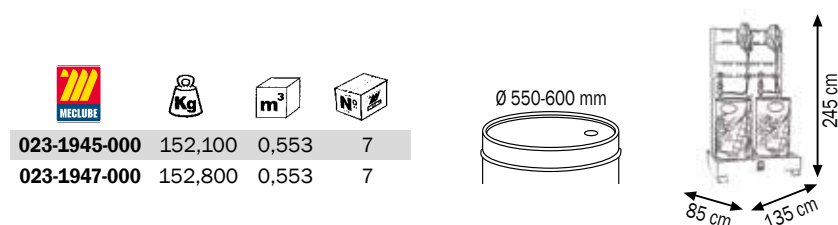

				
023-1945-000	152,100	0,553	7	
023-1947-000	152,800	0,553	7	



023-1945-000

Art. 023-1950-000

Complete installation for 2 drums of 180-220 l

Composed by:

Art.020-1188-000 N.2 Air-operated oil pumps **ratio=3:1 30 l/min**

Art.023-1930-000 N.1 Tank of dump complete with supporting structure

Art.074-4506-410 N.2 Closed hose reel with 1SC 1/2" hose 10,0 m length

Art.025-1265-000 N.2 Wall fixing brackets

Art.025-1268-094 N.2 Shanks Ø 42 mm 940 mm length

Art.025-1262-000 N.2 Drums connection Ø 42 mm

Art.910-0600-020 N.2 Flexible hoses Ø 1" 2,0 m length

Art.B27-1132-035 N.4 stainless steel screw clamps 32-35 mm

Art.906-0434-008 N.2 1SC 1/2" hose F-F 90° 0,8 m length


Art.024-1233-C00 N.2 Oil **digital** dispensing nozzles

Art. 023-1952-000

Complete installation for 2 drums of 180-220 l

Composed like Art.023-1950-000 but with:

Art.020-1198-000 N.2 Air-operated oil pumps **ratio=5:1 28 l/min**

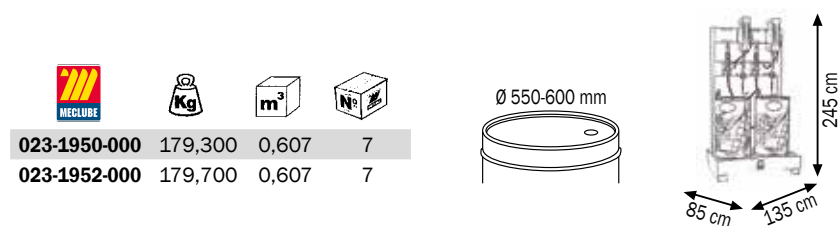

				
023-1950-000	179,300	0,607	7	
023-1952-000	179,700	0,607	7	



023-1950-000

Fixed and complete positions that offer an independent working station. They allow an optimal placing in every working environment (factories and repair shops) allowing to operate in a clean and safe way and without wasting of lubricant oils for different uses.