

Meclube Model FOOD SS20

Made of electro-polished
SS AISI 316

Compression ratio: 1:1
Max flow-rate: 20 l/min
Fluid connections: 3/4" Tri-Clamp




FDA
compliant

EX II 3/3 GD h IIB T4 135°C ATEX zone2

ARTICLE	CASING	DIAPHRAGM	BALLS	GASKET	FLUIDS
028-F020-AB1	SS AISI 316 E-P	HYTREL+PTFE	SS AISI 316	PTFE	high viscosity food products
028-F020-AB2	SS AISI 316 E-P	HYTREL+PTFE	PTFE	PTFE	low viscosity food and drink products


Performance

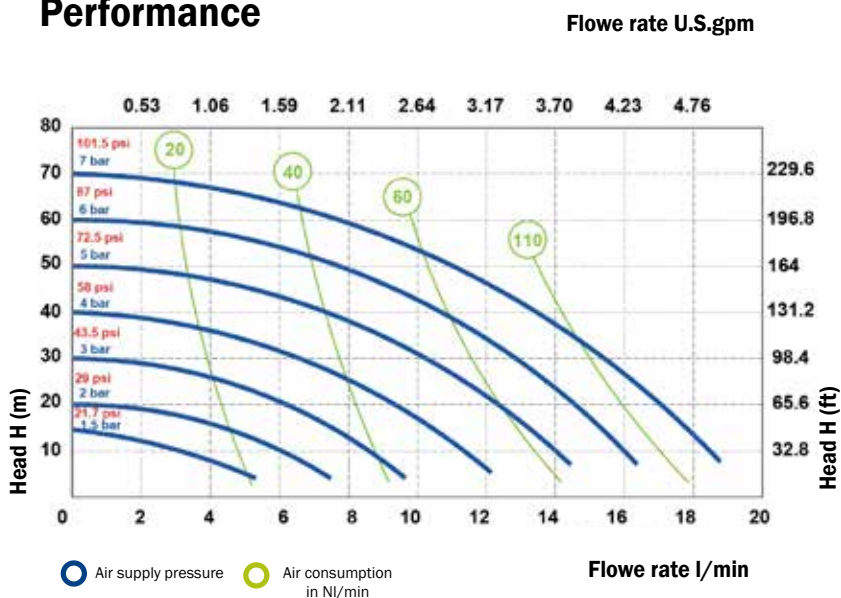

The curves and performance values refer to pumps with submerged suction and a free delivery outlet with water at 20°C, and vary according to the construction material.

Technical data

Fluid connections: **3/4" Tri-Clamp**
Air connection: **6 mm**
Max flow-rate: **20 l/min**
Max air pressure: **7 bar**
Max delivery head: **70 m**
Max Suction Lift Dry: **5,0 m**
Max Suction Lift Wet: **9,8 m**
Max Solid passing: **2,5 mm**
Noise level: **65 dB**
Displacement per cycle: **30 cm³**
Max Viscosity: **10000 cps**

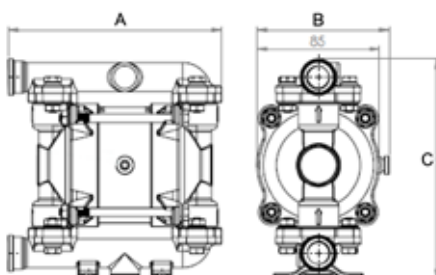

Dimensions

Food SS20

A (mm) 148
B (mm) 92
C (mm) 153
Gross weight kg 2,49
MAX Temperature -20°C + 95°C