

Meclube Model FOOD SS65

Made of electro-polished
SS AISI 316

Compression ratio: 1:1
Max flow-rate: 65 l/min
Fluid connections: 1" Tri-Clamp


FDA
compliant



EX II 3/3 GD h IIB T4 135°C ATEX zone2

ARTICLE	CASING	DIAPHRAGM	BALLS	GASKET	FLUIDS
028-F065-AB1	SS AISI 316 E-P	HYTREL+PTFE	SS AISI 316	PTFE	high viscosity food products
028-F065-AB2	SS AISI 316 E-P	HYTREL+PTFE	PTFE	PTFE	low viscosity food and drink products


Performance

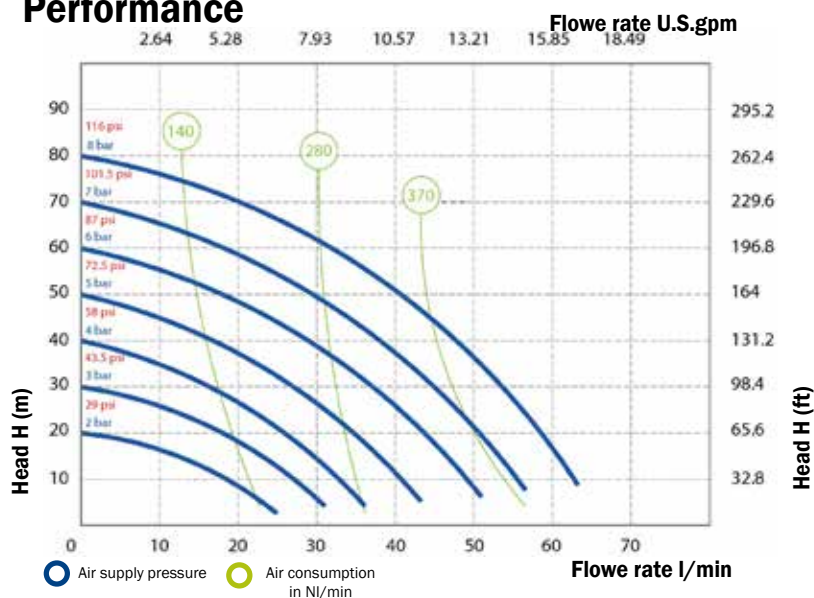

The curves and performance values refer to pumps with submerged suction and a free delivery outlet with water at 20°C, and vary according to the construction material.

Technical data

Fluid connections:	1" Tri-Clamp
Air connection:	1/4" BSP
Max flow-rate:	65 l/min
Max air pressure:	8 bar
Max delivery head:	80 m
Max Suction Lift Dry:	5,0 m
Max Suction Lift Wet:	9,8 m
Max Solid passing:	3,5 mm
Noise level:	72 dB
Displacement per cycle:	140 cm ³
Max Viscosity:	20000 cps

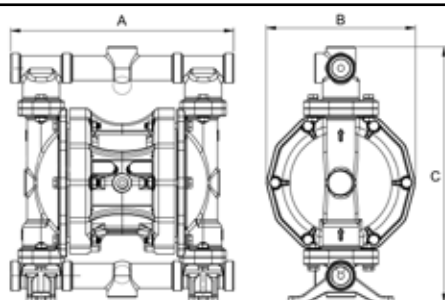

Dimensions

Food SS65

A (mm)	246
B (mm)	165
C (mm)	271
Gross weight kg	8,22
MAX Temperature	-20°C + 95°C