



Meclube Model SS20

Made of STAINLESS STEEL AISI 316

Compression ratio: 1:1

Max flow-rate: 20 l/min

Fluid connections: 3/8" BSP


EX II 3/3 GD h IIB T4 135 °C ATEX zone2

ARTICLE	CASING	DIAPHRAGM	BALLS	GASKET	FLUIDS
028-S020-AB1	SS AISI 316	NBR+PTFE	SS AISI 316	NBR	oil-exhausted oil-diesel fuel
028-S020-AB2	SS AISI 316	NBR+PTFE	PTFE	VITON	water-anti-freeze-windscreen-urea-AdBlue
028-S020-AB3	SS AISI 316	NBR+PTFE	PTFE	PTFE	aggressive fluids (acids and basics)

Technical data

Fluid connections:	3/8" BSP
Air connection:	6 mm
Max flow-rate:	20 l/min
Max air pressure:	7 bar
Max delivery head:	70 m
Max Suction Lift Dry:	5,0 m
Max Suction Lift Wet:	9,8 m
Max Solid passing:	2,5 mm
Noise level:	65 dB
Displacement per cycle:	30 cm ³
Max Viscosity:	10000 cps

Performance

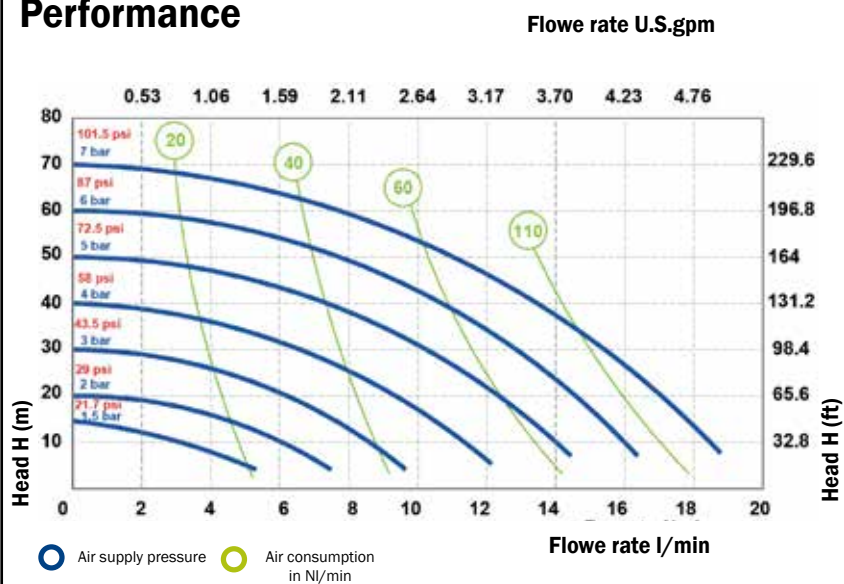

Dimensions

SS20

A (mm)	148
B (mm)	92
C (mm)	152
Gross weight kg	2,49
MAX Temperature	-20 °C + 95 °C

