





# DIESEL-AdBlue® TANK 400+50



| Ref. | Descrip. | Liquid | Flow rate | Voltage             | Power | Inlet-outlet | Conn. hose | Nozzle  | Flow meter  | Duty cycle | Weight | Packaging |
|------|----------|--------|-----------|---------------------|-------|--------------|------------|---|---|------------|--------|-----------|
|      |          |        | l/min     | AC V./Hz<br>DC Volt | W     | BSPG         | Ø          |  |  | min        | kg     | mm        |

|              |               |         |    |    |     |         |    |          |    |    |       |              |
|--------------|---------------|---------|----|----|-----|---------|----|----------|----|----|-------|--------------|
|              | 400 l         | Diesel  | 45 | 12 | 264 | F1"-F1" | 20 | Aut.PA60 | NO | 40 | 57,00 | 1200X800X796 |
| 090-6450-012 | Tank 400 + 50 |         |    |    |     |         |    |          |    |    |       |              |
|              | 50 l          | AdBlue® | 15 | 12 | 26  |         | 19 | Man.AD90 | NO | -  |       |              |

|              |               |         |    |    |     |         |    |          |     |    |       |              |
|--------------|---------------|---------|----|----|-----|---------|----|----------|-----|----|-------|--------------|
|              | 400 l         | Diesel  | 45 | 12 | 264 | F1"-F1" | 20 | Aut.PA60 | YES | 40 | 57,30 | 1200X800X796 |
| 090-6451-012 | Tank 400 + 50 |         |    |    |     |         |    |          |     |    |       |              |
|              | 50 l          | AdBlue® | 15 | 12 | 26  |         | 19 | Man.AD90 | NO  | -  |       |              |

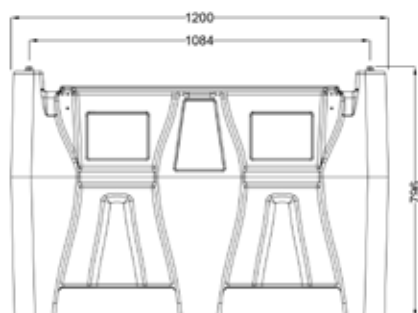

Combined tank for Diesel and AdBlue® transport for private use in total exemption for ADR (see ADR Regulation at page 180). Made of polyethylene with reinforced lockable lid. Diesel compartment with aluminium filling plug and integrated safety valve, AdBlue® compartment polyethylene plug. Complete with tank level indicator and suction filter only for diesel compartment. The tank is provided with chamfers to be lifted when it is full and grips to be lifted when empty. It is equipped with slots for positioning the fastening belts at the support base. Diesel and AdBlue® compartments supplied with 4 m long cable with pincers for the connection to power battery supply.

### “Diesel-AdBlue® Tank” series composed by:



**Art. 090-6450-000** Only 400 l Tank + 50 l without pump



**Art. 091-5081-045** 12V Pump - power cable (sec. 4 mmq, 4 m length) with pincers and fuse - 45 l/min



**Art. 098-6000-012** AdBlue® submerged pump 12V-15 l/min power cable (sec. 2,5 mmq. 4 m length) with pincers and fuse



**Art. 092-5124-000** Digital turbine flow meter MEC 24 min/max flow rate 7/120 l/min



**Art. 908-0516-040** Connection hose ø 20 mm M-M 1" 4 m length for diesel



**Art. 909-0500-040** Delivery hose EPDM ø 19x29 mm M-M 4 m length for AdBlue®



**Art. 099-5199-000** Manual plastic nozzle “AD90” Flow rate 90 l/min



**Art. 093-5210-000** Automatic nozzle PA60 Flow rate 70 l/min



**Art. 092-6000-220** Probe for tank 330 l - 440 l